

Full Length Research Paper

High reliability single-phase uninterruptible power supply

Albu Răzvan-Daniel* and Popențiu-Vlădicescu Florin

¹Department of Electronics, Faculty of Electrical Engineering and Information Technology, University of Oradea, Romania.

²UNESCO Chair in Information Technologies, University of Oradea, Academy of Romanian Scientists, Romania.

Accepted 3 November, 2010

Generally, the largest cost reduction is achieved by reducing the number of switches employed in a converter power circuit. Diodes are less expensive than active switches and apart from this there is also a cost reduction from eliminating all the circuitry for driving active switches. Reducing the number of switches and passive elements in uninterruptible power supply topologies not only reduces the cost of the whole system but also provides some other advantages such as greater compactness, smaller weight, and higher reliability.

Key words: Uninterruptible power supply, pulse-width modulation (PWM), low total harmonic distortion (THD), high reliability.

INTRODUCTION

If we need to supply clean and uninterrupted power to equipment in critical applications, under essentially any normal or abnormal utility power conditions, including outages for up to 15 min, we will use an uninterruptible power supplies (UPS's). Such critical applications are: Computers, industrial controls, life support systems, etc. In order to be able to supply power in the absence of input to the power source, the UPS employs some form of bulk energy-storage mechanism (Popescu et al., 2002, 2004). Most UPS systems use batteries, usually lead acid, as bulk energy-storage mechanism. Other schemes may employ the mechanical inertia of a large flywheel coupled to the shaft of a rotating machine or the stored magnetic energy in the field of a super-conducting coil. The most widely used storage devices are maintenance-free gel batteries because of their portability and low-maintenance requirements (Popescu et al., 2004). The conversion process between ac and dc storage is typically electronic.

A typical on-line UPS system (or double-conversion

UPS) consists of a rectifier/charger a battery set, an inverter, and a static switch (bypass). Figure 1 shows the block diagram of a typical on-line UPS.

UPS systems are classified into three types: Static, rotary, hybrid static/rotary. The most commonly used are static UPS systems. The main types of the static UPS systems are: On-line, off-line, and line-interactive configurations. An ideal UPS should be able to deliver uninterrupted power while simultaneously providing the necessary power conditioning for the particular application. Comparing the three types of UPS systems (on-line, off-line, and line-interactive), the most expensive and less reliable are on-line UPS systems. In spite of these disadvantages, on-line UPS systems are irreplaceable in some applications. In applications that need the input electrical energy to be continuously provided, without any interruption, on-line UPS systems are the only one appropriate because their transit time is null. This paper presents a method to increase reliability and reduce the cost at the same time, for a single-phase on-line low power UPS system, that could provide as output high quality electrical energy, with low total harmonic distortion (THD). A single-phase on-line UPS system is composed of the following electronic circuits: A single-phase rectifier/charger, a battery set, an inverter,

*Corresponding author. E-mail: ralbu@uoradea.ro. Tel: +40745174232.

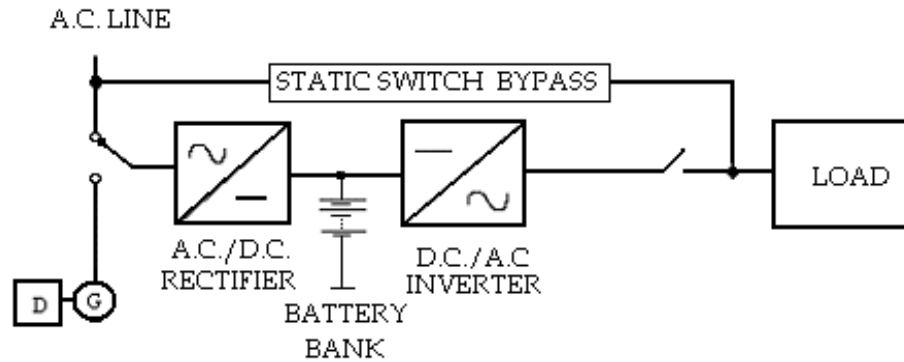


Figure 1. Block diagram of a typical on-line UPS system.

and a static switch (bypass). This paper present a topology that contains all these circuits, but from which there were replaced a number of relatively expensive active components and their command circuits with more reliable and cheap capacitors or diodes. We can observe on the simulated wave-forms that the output voltage has a high quality with low total harmonic distortion (THD).

On-line uninterruptible power supply (UPS)

The charger continuously supplies the DC bus with power and its power rating is required to meet 100% of the power demanded by the load as well as the power demanded for charging the battery bank. The inverter is rated at 100% of the load power because it must supply the load during the normal mode of operation but also during the backup time. The main advantage of the on-line UPS systems is that there is no transfer time associated with the transition from normal mode to stored energy mode. The static switch provides redundancy of the power source in the case of UPS malfunction or overloading. The AC line and load voltage must be in phase in order to use the static switch. This can be achieved easily by locked-phase control loop. There are three operating modes related to this topology: Normal mode, stored energy mode, and bypass mode.

Normal mode of operation

During normal mode of operation, the power to the load is continuously supplied via the rectifier/charger and inverter; a double conversion, that is, AC/DC and DC/AC takes place (Erickson et al., 2001; Kassakian et al., 1981; Mohan et al., 1995; Popescu et al., 1999). It allows very good line conditioning. The AC/DC converter charges the battery set and supplies power to the load via the inverter, therefore it has the highest power rating in this topology, increasing the cost. In this mode of operation, the step-up voltage converter is not functional, but the

single-phase rectifier, the single-phase voltage inverter, and the step-down voltage converter are functioning.

Stored-energy mode of operation

The duration of this mode is the duration of the pre-set UPS backup time or until the AC line returns within the pre-set tolerance. The inverter and the battery maintain continuity of power to the load when the AC input voltage is outside the pre-set tolerance (Popescu et al., 2004). When the AC line returns, a phase-locked loop (PLL) makes the load voltage in phase with the input voltage and after that the UPS system returns to the normal operating mode.

In this mode of operation, the single-phase rectifier and the step-down voltage converter are not functioning but the single-phase voltage inverter and the step-up voltage converter are functioning.

Bypass mode of operation

In case of an internal malfunction such as over-current, the UPS will operate in this mode. This mode is also used for fault clearing. The output frequency should be the same as the AC line frequency in order to ensure the transfer of power. In some cases, there can be a maintenance bypass as well. A manual switch usually operates it. The main advantages of on-line UPS are very wide tolerance to the input voltage variation and very precise regulation of output voltage. In addition, there is no transfer time during the transition from normal to stored energy mode. It is also possible to regulate or change the output frequency. The main disadvantages of this topology are low-power factor, high THD at the input, and low efficiency. The input current is distorted by the rectifier unless an extra power factor correction (PFC) circuit is added (Lascu, 2004; Kamran et al., 1998; Park et al., 2001), but this adds to the cost of the UPS system. The on-line UPS cannot efficiently utilize the utility

network and local installation because of this inherently low input power factor. Because of the double-conversion nature of this UPS, the low efficiency is inherent to this topology. Compared to off-line and line-interactive UPS systems, the power flow through the rectifier and inverter during the normal operation means higher power losses and lower efficiency. Despite the disadvantages, double-conversion UPS is the most preferred topology in performance, power conditioning, and load protection. This is the reason why they have a very broad range of applications from a few KAV to several MVA. This broad range of applications brings a large diversity of topologies in on-line UPS systems. Each topology tries to solve different specific problems and the particular choice depends upon the particular application. However, generally, there are two major types of double-conversion topologies: With a low-frequency transformer isolation and with a high-frequency transformer isolation (Erickson et al., 2001; Kassakian et al., 1981; Popescu et al., 1999).

Concept of reduced-parts converters applied to single-phase on-line UPS systems

A typical single-phase on-line UPS system based on full-bridge converters is shown in Figure 2.

If we replace in the single-phase on-line UPS system based on full-bridge converters presented in Figure 2, the S2, S3 active switches of the RFC rectifier, the S7, S8 active switches of the inverter and their command circuits with C1, C2 capacitors will obtain a more reliable and cheap single-phase on-line UPS system. Applying the concept of reducing the number of switches to the UPS system (Lascu, 2004; Jacobina et al., 2001), based on full-bridge converters naturally leads to the UPS systems based on half-bridge converters is shown in Figure 3.

The UPS system based on full-bridge converters (Erickson et al., 2001; Popescu et al., 1999, 2004) has some advantages over the one based on half-bridge converters: Better utilization of the DC-link voltage, two times lower voltage stresses across the switches, and an option of zero state for the switches, which allows using more advanced control strategies. These advantages make the UPS system from Figure 2 the preferable choice for medium and high-power applications. The disadvantage is that it has a large number of switches. It also requires an isolation transformer at the back-end, which is bulky, heavy and expensive. This is why the UPS system based on half-bridge converters from Figure 3 is the preferable choice for low-power applications. It not only has two times lower the number of switches than the UPS topology from Figure 2, but it also has a common neutral for the input and the output, eliminating the need for an isolation transformer.


One of the most important features of UPS systems is their reliability and availability (Popescu et al., 2004). The

component that influences these characteristics most considerably is the battery. There are two options for connecting batteries in UPS systems. The first is to connect them directly in parallel with the DC-link capacitors, which leads to several problems, such as: Space, cost, reliability, and safety issues. The second is to add a bi-directional DC/DC converter. An on-line UPS system, based on half-bridge converters using a bi-directional DC/DC converter is shown in Figure 4.


During the normal mode of operation, the buck converter charges the battery bank and at the same time the power to the load is continuously supplied from the AC line through the rectifier, to the inverter, and finally to the load. Switches S1 to S5 are active, while switch S6 is idle. The S1, S2 active switches and the L1 inductor are part of the RFC rectifier which role is to reduce distortions introduced in the public electrical network by the single-phase on-line UPS system. During the stored-energy mode of operation, when the AC input voltage is beyond a pre-set tolerance, switch S_{in} disconnects the UPS system from the grid. The DC/AC inverter and the battery bank maintain continuity of power to the load. Since the battery voltage is low, it first requires to be boosted to a high DC voltage for proper operation of the DC/AC inverter. Switch S6 is active during this operation mode as well as the inverter's switches S3 and S4. The rectifier does not work during this mode and its switches S1 and S2 are idle.

Reduced-parts single-phase on-line UPS system

Considering the UPS system from Figure 4 reveals that switch S6 can be eliminated, as long as the low battery voltage can be boosted to a high DC voltage. Taking advantage of the fact that the AC/DC rectifier is of a boost type (Erickson et al., 2001; Kassakian et al., 1981; Mohan et al., 1995; Popescu et al., 1999), and it is not in use during the stored-energy mode of operation, it is possible to eliminate switch S6 by changing the topology of the UPS system from Figure 4, in such a way that the rectifier leg is used as a part of a DC/DC boost converter during the stored-energy mode of operation. Apart from eliminating switch S6, the use of the rectifier as a boost DC/DC converter during the stored-energy mode of operation relaxes the current rating requirements for the inductor in the DC/DC converter. As a result, the inductor is significantly smaller, lighter and less expensive. The proposed new single-phase on-line UPS system with a reduced number of switches is shown in Figure 5. In comparison with the topology presented in Figure 2 which contains eight active switches and a transformer for making a RFC rectifier and an inverter, the new topology proposed in Figure 5 contains: a RFC rectifier, a buck converter, a boost voltage converter and an inverter, made with only five active components, which means an increase in reliability and a reduction of the total weight,

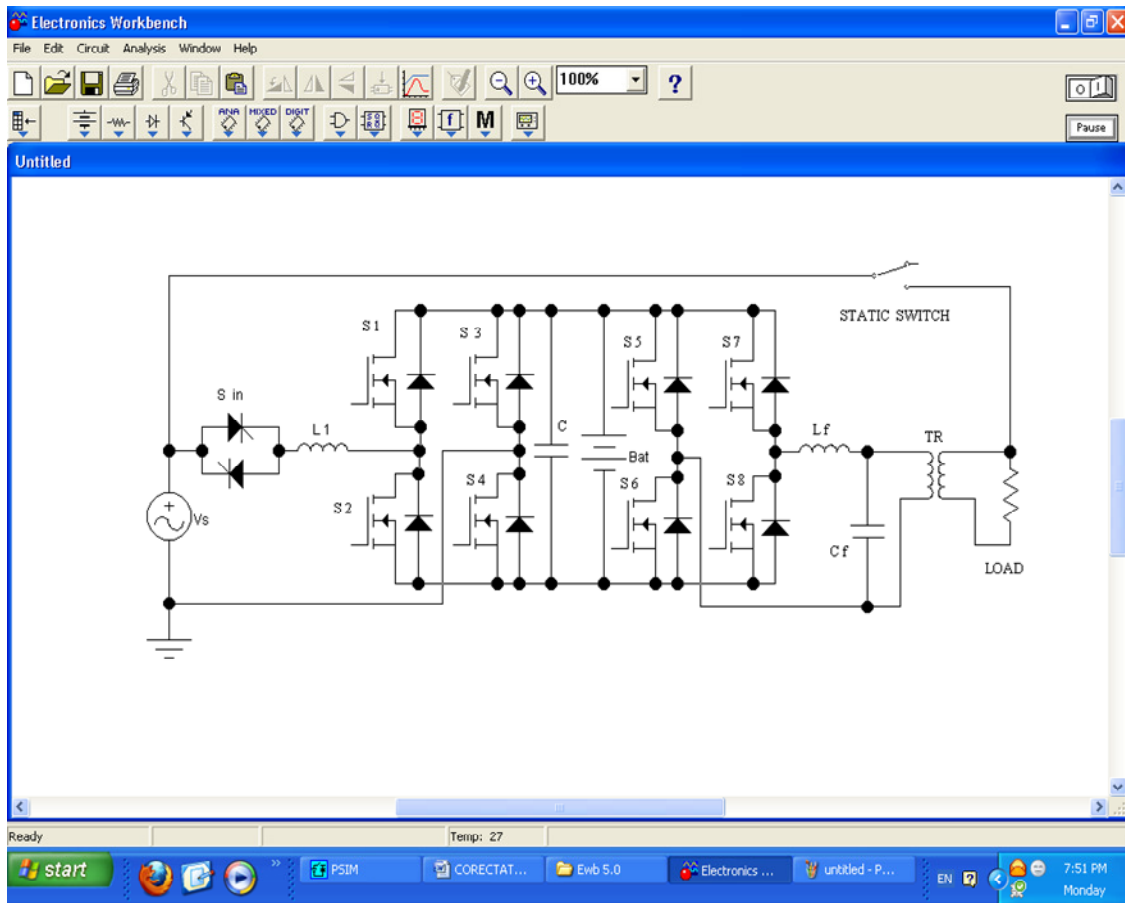


(a)

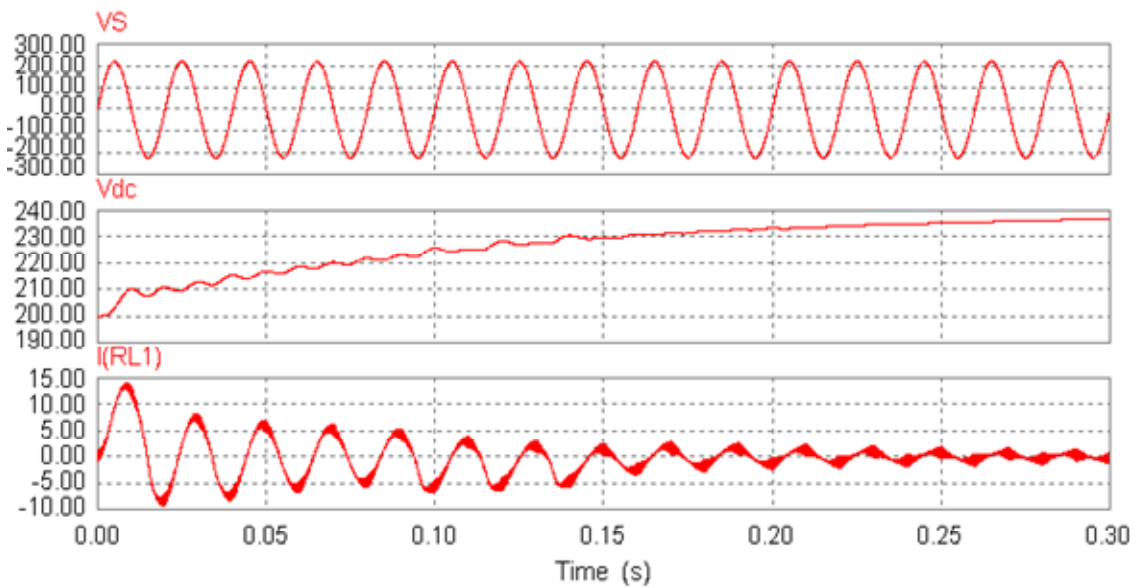


(b)

Figure 2. Typical single-phase-line UPS system based on full-bridge converters (a) diagram electric; (b) waveforms of voltage and current.

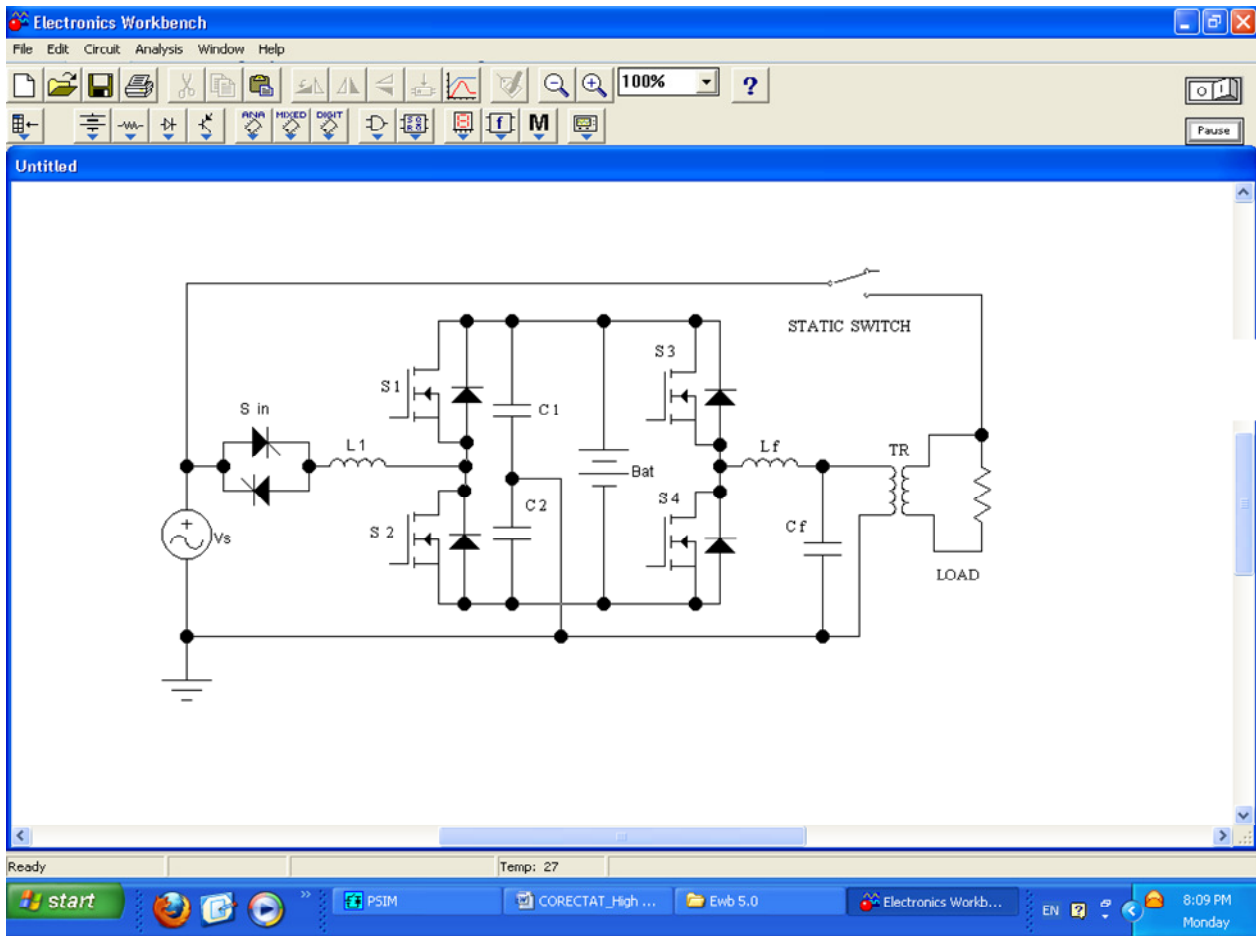


(a)

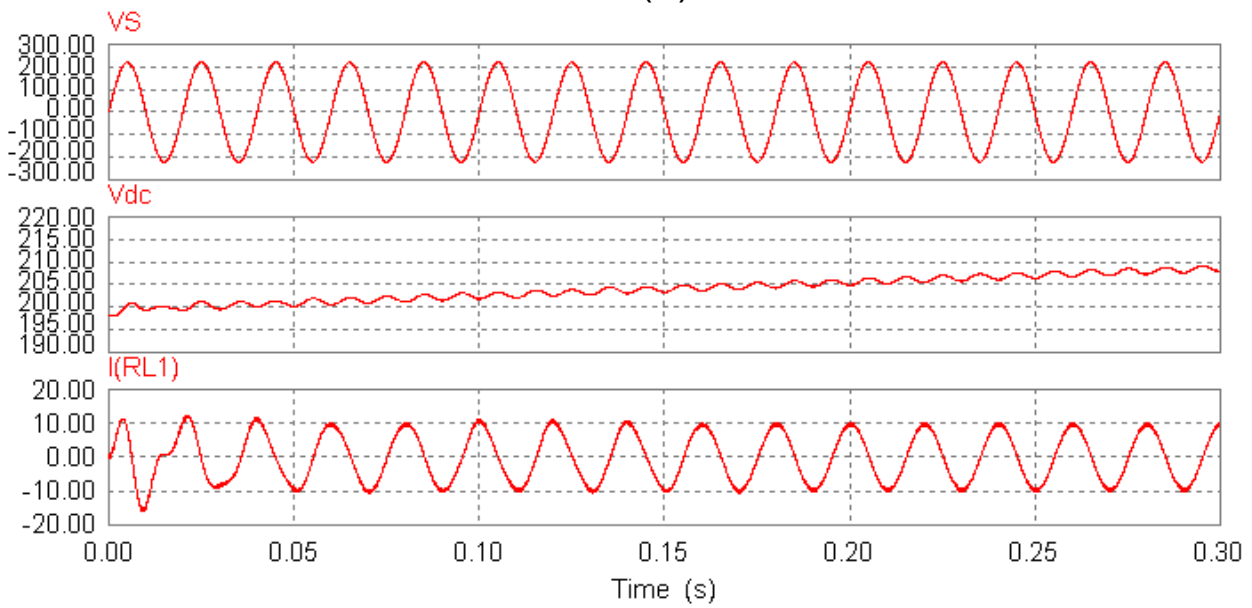


(b)

Figure 3. Typical single-phase on-line UPS system based on half-bridge converters (a) diagram electric; (b) waveforms of voltage and current.

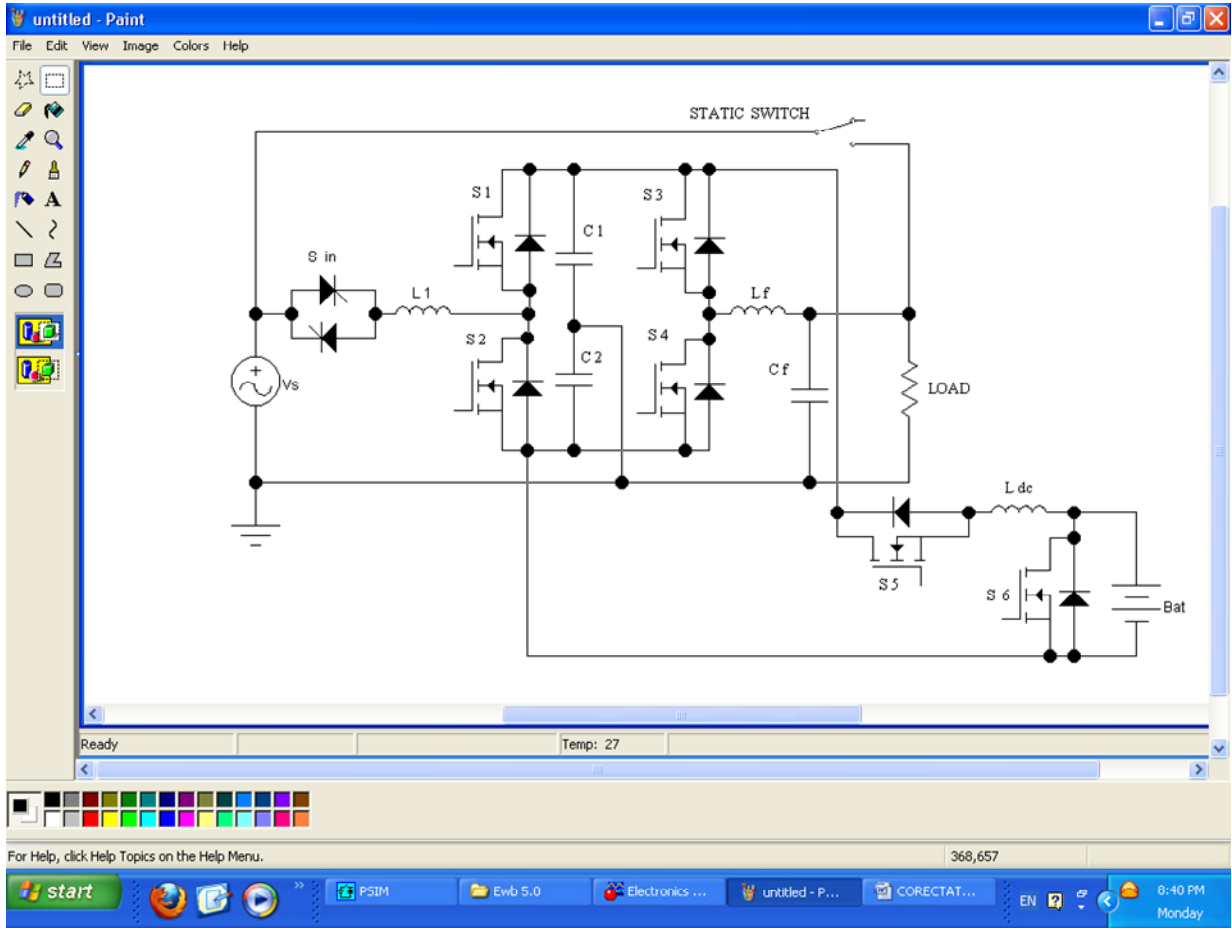

(a)

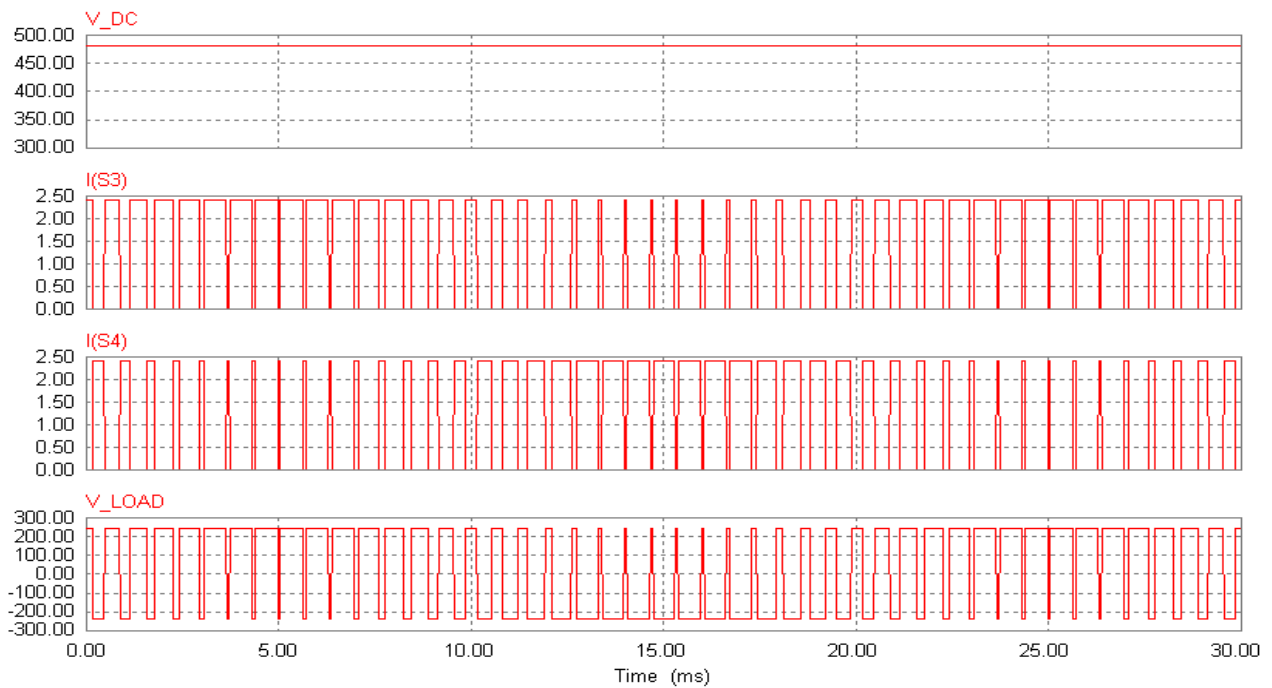

b)

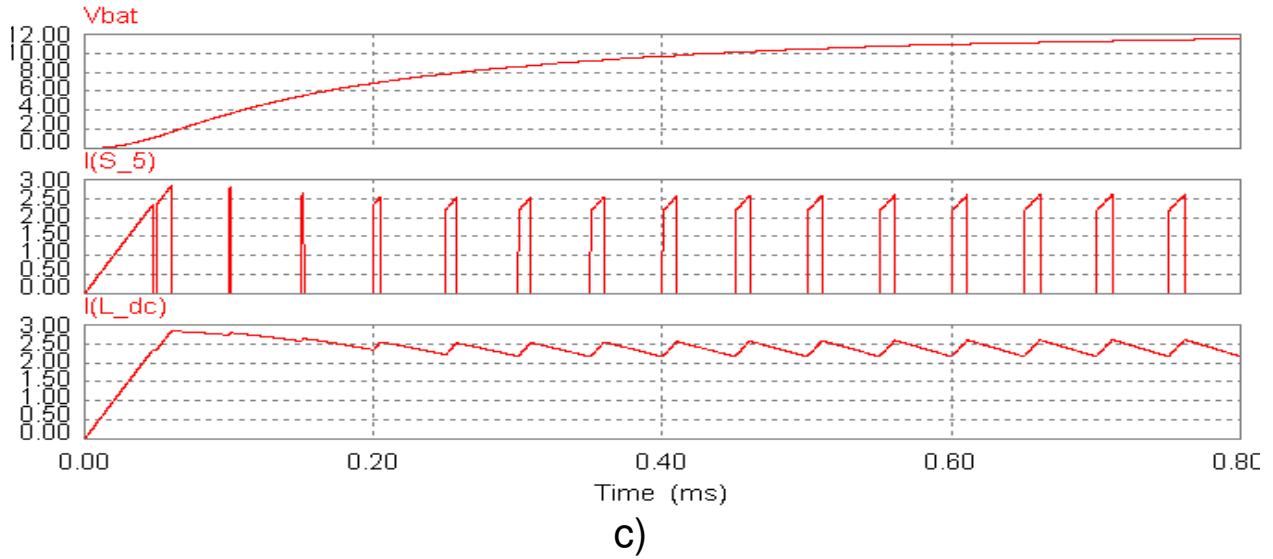


Figure 4. Typical single-phase on-line UPS system based on half-bridge converters with bi-directional DC/DC converter(a) diagram electric (b) waveforms of voltage and current from inverter; (c) waveforms of voltage and current from the converter Buck.

volume and cost.

RESULTS

The new single-phase on-line UPS system, shown in Figure 5 has a front-end AC/DC rectifier, with power factor correction capabilities (Lascu, 2004), a DC/AC inverter, a step-down DC/DC converter, a battery bank, an input switch S_{in} , a transfer switch S_t in the form of a thyristor, and a bypass static switch (Popescu et al., 2004). The AC/DC rectifier consists of an input inductor L_1 , switches S_1 and S_2 , and two electrolytic capacitors C_1 and C_2 . The purpose of the rectifier is to keep the input current sinusoidal and in phase with the input AC voltage, while maintaining the required DC bus voltage at a level necessary for proper operation of the back-end inverter. The DC/AC inverter consists of a split DC bus, and switches S_3 and S_4 , as well as an output LC filter. It operates in a high-frequency sinusoidal pulse width modulation (SPWM) pattern in order to provide a high-quality sinusoidal output voltage (Lascu, 2004; Erickson et al., 2001; Kassakian et al., 1981; Mohan et al., 1995; Popescu et al., 1999).

The front-end AC/DC rectifier work in the following way: During the positive half cycle of the input AC voltage, when switch S_2 is on, the expression for the voltage across the input inductor L_1 is derived from the second Kirchhof’s law:

$$V_{L1} = L_1 \frac{di_s}{dt} = V_s + V_{C2} \tag{1}$$

The voltage applied across the input inductor is positive; hence, the inductor current increases.

When switch S_2 is turned off, the inductor current needs to continue flowing in the same direction. The only possible current path in this case is $V_s^+ - L_s -$ reverse diode of $S_1 - C_1 - V_s^-$. The upper capacitor C_1 is charged with the energy stored in inductor L_1 .

The voltage across the input inductor L_1 , is:

$$V_{L1} = L_1 \frac{di_s}{dt} = V_s - V_{C1} \tag{2}$$

Extensive computer simulations have been carried out using PSIM and ELECTRONICS WORKBENCH simulation software.

Conclusions

After many simulations with different (R and R-L) resistive and inductive loads, we concluded that the proposed single-phase on-line UPS system can deliver at the output a high quality voltage, and to create at the input a high power factor, while the number of active switches was reduced and the transformer was eliminated. The reliability of the system was improved; the cost, weight and volume of the system were reduced; and last but not least, the proposed on-line UPS system despite other UPS systems has the advantage of a null transit time. The input AC voltage V_s and current $I(L_1)$ in Figure 6 show that the input current $I(L_1)$ is a sine wave in phase with the input voltage resulting in excellent power factor(Lascu, 2004).



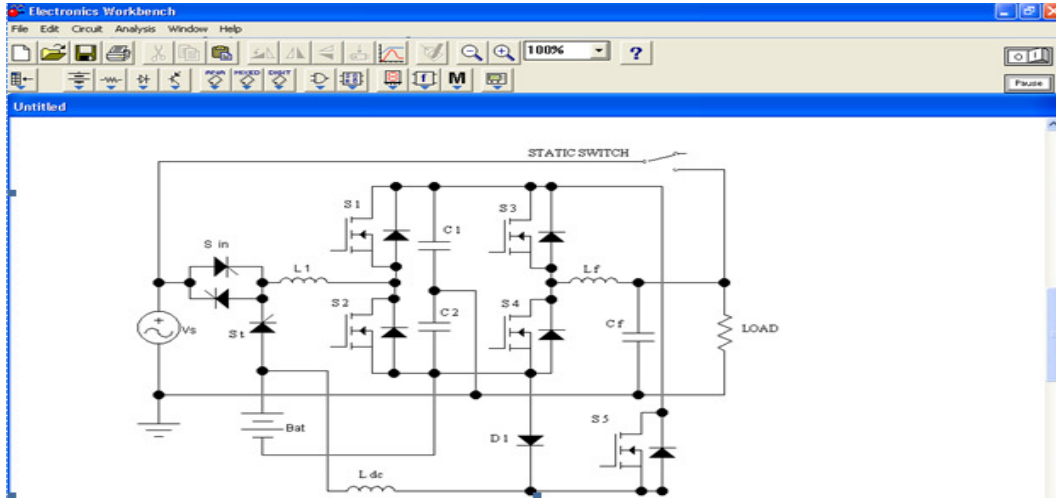


Figure 5. Proposed new single-phase on-line UPS system with reduced number of switches.

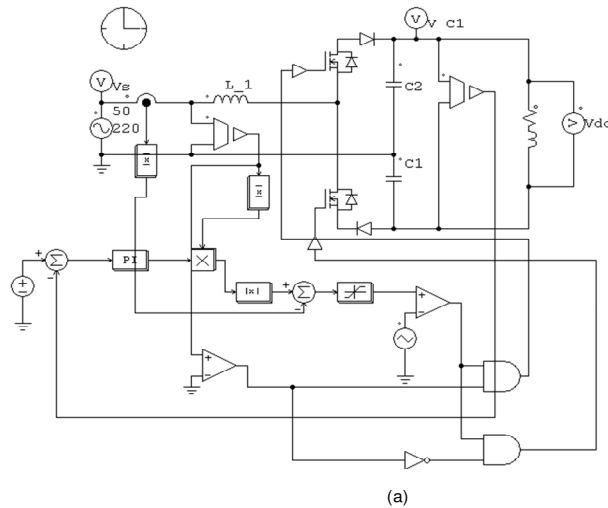

(a)

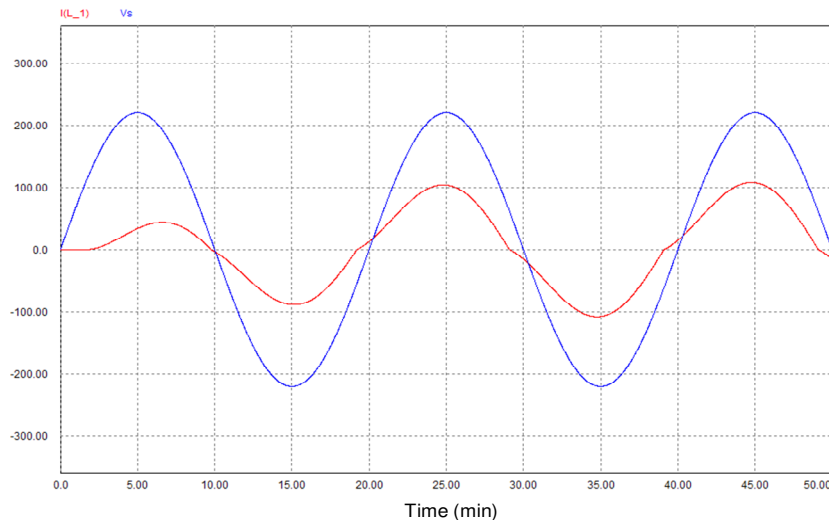

(b)

Figure 6. Simulation Results (a) diagram electric; (b) waveforms of voltage and current from a rectifier, with power factor correction capabilities.

REFERENCES

- Lascu D (2004). Techniques and circuits for active power factor correction, Editura de Vest, Timisoara, pp. 82-83.
- Erickson RW, Maksimovic D (2001). Fundamentals of power electronics, Second Edition, Kluwer Academic Publishers Group, Massachusetts, pp. 72-114.
- Jacobina CB, Correa MB de R, Ribeiro RLA, Oliveira TM, da Silva, ERC, Lima AMN (2001). AC/AC converters with a reduced number of switches, in Proceedings of the 36th Industry Applications Society Annual Meeting, Sep./Oct., pp. 1755-1762.
- Kassakian JG, Schemelch MF, Verghese GC (1991). Principles of power electronics, Addison Wesley, pp. 66-105.
- Kamran F, Habetler TG (1998). A novel on-line UPS with universal filtering capabilities, IEEE Transactions on Power Electronics, 13 (2): 366-371.
- Mohan N, Undeland T, Robbins W (1995). Power Electronics: Converters, Applications and Design, Second Edition, New York, John Wiley and Sons, pp. 35-89.
- Park HW, Park SJ, Park JG, Kim C (2001). A novel high-performance voltage regulator for single-phase AC sources. IEEE Trans. Ind. Electron., 48(3): 554-562.
- Popescu V, Lascu D, Negoitescu D (1999). Power converters. Applications. Editura de Vest, Timisoara.
- Popescu V, Lascu D, Negoitescu, D (2002). Power supplies in telecommunications. Editura de Vest, Timisoara, pp. 23-79.
- Popescu V (2004). Uninterruptable power supplies. Editura de Vest, Timisoara, pp. 31-67.