The cover features a stone well with a small opening on the left. The well is surrounded by a low stone wall. In the foreground, a large, vibrant green leaf with prominent veins is partially submerged in the water, creating a grid-like pattern. The water is clear, and the overall scene is bright and natural.

Journal of Environmental Chemistry and Ecotoxicology

Volume 9 Number 2 June 2017

ISSN 2141-226X



*Academic
Journals*

ABOUT JECE

The **Journal of Environmental Chemistry and Ecotoxicology (JECE)** is published bi-monthly (one volume per year) by Academic Journals.

Journal of Environmental Chemistry and Ecotoxicology (JECE) is an open access journal that provides rapid publication (bi-monthly) of articles in all areas of the subject such as ocean acidification, pesticides use and regulation, arsenic induced genotoxicity by curcumin, heavy metals and its environmental effect etc.

The Journal welcomes the submission of manuscripts that meet the general criteria of significance and scientific excellence. Papers will be published shortly after acceptance. All articles published in JECE are peer-reviewed.

Contact Us

Editorial Office: jece@academicjournals.org

Help Desk: helpdesk@academicjournals.org

Website: <http://www.academicjournals.org/journal/JECE>

Submit manuscript online <http://ms.academicjournals.me/>

Editors

Prof. Peter Massanyi

*Slovak University of Agriculture, Faculty of
Biotechnology and Food Sciences, Department of
Animal Physiology,
Management,
Tr. A. Hlinku 2, SK-949 76 Nitra, Slovak Republic,
Slovak Republic.*

Prof. Mostafa El-Sheekh

*Faculty of Science, Tanta University,
Tanta 31527,
Egypt.*

China

Prof. Minghua Zhou

*Nankai University,
No. 94, Road Weijin,*

*Nankai District,
Tianjin 300071,
China.*

Prof. Muhammad Abdul Rauf

*United Arab Emirates University,
United Arab Emirates.*

Prof. Shao Hongbo

*Qingdao University of Science Technology,
Zhengzhou Road 53, Qingdao266042, China ,
China.*

Prof. Ghasem D. Najafpour

*Oshirvani University of Technology
Babol, Iran
Iran.*

Prof. Toyin Ayodele Arowolo

*Department of Environmental Management &
Toxicology,
College of Environmental Resources*

*University of Agriculture,
P.M.B. 2240,
Abeokuta 110001,
Ogun State,
Nigeria.*

Dr. Xue Song Wang

*Department of Chemical Engineering,
Huaihai Institute of Technology,
CangWu Road 59#, Lianyungang, Jiangsu, PR.*

Dr. Mohamed Nageeb Rashed

*Aswan Faculty of Science, South Valley University,

Aswan,
Egypt.*

Prof. Hamayun Khan

*Department of Chemistry
Islamia College University
Peshawar-25120,
Pakistan.*

Editorial Board

Dr. Mohammad Al-Hwaiti

*Al-Hussein Bin Talal University
Environmental Engineering Department
O. Box (20) Ma'an-Jordan
Jordan.*

Prof. Ajai Kumar Srivastav

*DDU Gorakhpur University
Department of Zoology, DDU Gorakhpur University,
Gorakhpur,
INDIA.*

Nathaniel C. Añasco

*University of the Philippines Visayas
Miagao, Iloilo 5023 Philippines
Philippines.*

Prof. El-Refaie Kenawy

*King Saud University,
Faculty of Science,
Department of Chemistry,
Petrochemicals Research Chair,
B.O.Box 2455 Riyadh 11451 ,Saudi Arabia
Saudi Arabia.*

Dr. K. Senthil Kumar

*TÜV SÜD South Asia Pvt. Ltd.,
No: A-151, 2nd C Main, 2nd Stage, Peenya Industrial
Estate,
Bangalore 560058, Karnataka State, INDIA
India.*

Dr. Omotayo Sarafadeen Amuda

*Ladoke Akintola University of Technology
Ilorin Road, Ogbomoso,
Nigeria.*

Dr. Jitendra Pandey

*Banaras Hindu university
Environmental Science Division, Department of Botany,
Banaras Hindu university, Varanasi - 221005,
India.*

Dr. Soumya Chatterjey

*Defence Research Laboratory, Tezpur (DRDO)
Post Bag No. 2, Tezpur 784001, Assam,
India.*

Prof. Bechan Sharma

*University of Allahabad
Department of Biochemistry,
Allahabad-211002,
India.*

Dr. Ghousia Begum

*Indian Institute of Chemical Technology,
Hyderabad 500 007, A.P; India
Prof. Gang Yang
Key Laboratory of Forest Plant Ecology, Ministry of
Education,
Northeast Forestry University
26 Hexing Road, Harbin
China.*

Dr. Anindita Bhattacharyya

*Indian Statistical Institute
203, B. T. Road, Kolkata 700108, West Bengal,
India.*

Dr. Onome Davies

*Rivers State University of Science & Technology, Port
Harcourt, Rivers State
Dept. of Fisheries & Aquatic Environment, P.M.B. 5080,
Port Harcourt,
Nigeria.*

Dr. B. Stephen Inbaraj

*Fu Jen University
Department of Nutrition & food science,
Taipei 242, Taiwan
Environmental Chemistry & Analytical Chemistry
Taiwan.*

Dr. Hala A. Awney

*Institute of Graduate Studies and Research,
Alexandria University,
Egypt.*

Dr. Suhel Parvez

*Leibniz Institute for Neurobiology
Brenneckestr. 6, Magdeburg 39118,
Germany.*

Dr. Mayalagu Rajkumar

*Institute of Oceanology, Chinese Academy of Sciences
7 Nanhai Road, Qingdao, 266071
China.*

Dr. Eldon Raj Rene

*University of La Coruna
Department of Chemical Engineering, Spain*

Vyacheslav Khavrus

*L. V. Pisarzhevskii Institute of physical chemistry of
NAS of the Ukraine (permanent position)
Ukraine.*

ARTICLE

- Evaluation of heavy metals in the soils of Karaikudi Town in India** **8**
BODJONA Bassaï Magnoudéwa, RAMESH Babu B. and TCHEGUENI Sanonka

Full Length Research Paper

Evaluation of heavy metals in the soils of Karaikudi Town in India

BODJONA Bassai Magnoudéwa^{1*}, RAMESH Babu B.² and TCHEGUENI Sanonka¹

¹Laboratoire GTVD (Gestion, Traitement et Valorisation des Déchets), Faculté des Sciences, Université de Lomé, 01 B.P. 1515, Lomé 01, Togo.

²CSIR-Central Electro-Chemical Research Institute, Pollution Control Division, Karaikudi-630 003, Tamil Nadu, India.

Received 16 February, 2017; Accepted 26 May, 2017

The Central Electro-Chemical Research Institute in India has a department that specializes in the design of both lead and nickel-chromium batteries. However, the laboratories activities have brought soils contamination of this department. This work involves assessing the presence of heavy metals such as lead, nickel and chromium in contaminated soils in the Center through the single and sequential extraction methods. Three samples were taken notably: the witness sample S1, which made it possible to determine the optimum parameters extraction (pH and concentrations of the extractant solutions) and then S2 and S3 which constitute the contaminated soils. Among the three extractants used for simple extraction (EDTA, $\text{CaCl}_2 \cdot 2\text{H}_2\text{O}$ and $\text{CH}_3\text{COONH}_4$), the results show that EDTA extracts fairly high contents of Pb (77.63 ± 0.41 mg/kg), of Ni (67.37 ± 0.36 mg/kg) and Cr (60.22 ± 0.32 mg/kg). These contents constitute the bioavailable fraction of the three heavy metals and represent 69 to 84% of their total contents. The total contents contaminated soils are determined at 111.38 ± 0.59 mg/kg for lead, 79.95 ± 0.42 mg/kg for nickel and 74.47 ± 0.39 mg/kg for chromium. Compared with AFNOR standard NF U 44-041, the lead and nickel contents are higher. Moreover, the sequential extraction shows a large margin of the mobile and mobilizable fraction of all the metals studied in the contaminated soil samples. These results allow saying that there are risks of environmental pollution in the contaminated soils of the Central Electro-Chemical Research Institute.

Key words: Heavy metals, single extraction, sequential extraction, speciation, pollution.

INTRODUCTION

In the recent years, the development of human activities (metallurgical and chemical industries, agriculture, etc.) results in the accumulation of heavy metals in soils such as lead, nickel and chromium. These heavy metals are dangerous because of their toxicity to humans and their bioaccumulative nature (Muhammad et al., 2008; Jamali

et al., 2009). In fact, soil contamination poses a risk of toxicity to living things and humans through the food chain. It impedes the growth and viability of vegetation (Mpundu et al., 2013; Katoh et al., 2012). The heavy metals, namely chromium and nickel, are essential to the development of plants and animals. However, at

*Corresponding author. bodjonabenoit@yahoo.fr Tel: (00228) 22 36 41 60 / 90 12 54 11.

excessively high doses, they can be toxic. Others, such as lead, whose indispensability has not been shown, are potentially toxic (Alloway, 1995).

The geographic setting of this study is the Central Electro-Chemical Research Institute located in south India, Karaikudi town. It is a reference center in India that specializes in electrochemistry. A department of this Center, responsible for research on lead batteries and nickel-chromium batteries, has for several years carried out its research activities by dumping chemical effluents on soils. This practice led us to evaluate, in contaminated soils, the contents of three heavy metals concerned by this practice, in particular lead, nickel and chromium. However, unlike most organic contaminants, metallic elements are non-biodegradable and potentially toxic substances. Many chemical extraction (leaches) procedures have been proposed in the literature to estimate the mobility of metals in soil and sediments, or their bioavailability defined as the capacity of an element to be transferred from a soil fraction to a living organism, regardless of mechanism (Leleyter et al., 2012).

Indeed, the work carried out in the framework of this study, are much more oriented toward simple extraction while also addressing the sequential extraction to highlight the mobile and mobilizable fraction (or "labile") of metals in the soils studied. The reason for this choice is that simple extractions performed in one step, are inexpensive and fast (Leleyter et al., 2005). The advantage of the sequential extractions protocols resides in the use of appropriate chemical reagents to release various fractions of heavy metals from the soil. Each extraction is supposed to destroy the binding agent between the metal and the solid fraction of soil, allowing the metal species to be detected by appropriate analytical procedures. For this study, the compounds used for the simple extraction are the complexing EDTA and the salts $\text{CaCl}_2 \cdot 2\text{H}_2\text{O}$ and $\text{CH}_3\text{COONH}_4$. The extraction with the solutions of $\text{CaCl}_2 \cdot 2\text{H}_2\text{O}$ and $\text{CH}_3\text{COONH}_4$ aims at quantifying the active part of the pollution (mobile fraction) and best represents the intrinsic conditions of the soil in terms of ionic strength. EDTA extraction aims to measure the mobilizable metal fraction, that is to say the active part of the pollution and a potentially active part. Indeed, EDTA is a chelating agent with an ability to extract metals present in non-silica-bound phases, including metals complexed with organic ligands (Garrabrants et al., 2000). For extraction with EDTA and the salts $\text{CaCl}_2 \cdot 2\text{H}_2\text{O}$ and $\text{CH}_3\text{COONH}_4$, a study was carried out with the witness soil (Uncontaminated soil of Center) in order to determine the optimum pH and the optimal concentration of the extractant solutions in order to reach better the extractable maximum.

All metallic elements present in the soil or sediment are potentially mobilizable if changing from a physicochemical parameter such as pH, the redox-potential and/or concentration of ligands (Kato et al., 2012). Among the factors that have the greatest impact on the mobility of

metals is pH. The pH of the medium influences the solubility of metals by altering the balance of distribution of metals between the liquid phase and solid phase (Leleyter and Baraud, 2005). When the elements are stable in cationic form (Pb^{2+} , Cr^{3+} or Cr^{6+} , Ni^{2+} , etc.), the increase of pH promotes the deprotonation of the soil particles and thus increases the binding of cations by the soil. For this reason, the extraction was carried out in an acid medium to promote the solubility of the metal cations.

To effectively remediate heavy-metal-contaminated soil, it is necessary to know the amount of toxic elements in the soil (Kato et al., 2012). The objective of this work is to evaluate the contents of heavy metals in contaminated soils of the Central Electro-Chemical Research Institute using simple and sequential extraction methods in order to locate the potentially mobilizable fraction.

MATERIALS AND METHODS

Sampling

All experiments (Extraction of heavy metals) were carried out on three types of soil (S1, S2 and S3). These three soil samples were collected at Central Electro Chemical Research Institute in India. The contaminated soils (S2 and S3) were collected from depths of 0–15 cm. The sampling covers all "fine earth" of study zone (The size less than 2 mm). The first soil sample (S1) was used to search the optimum extraction parameters. The soil S1, which is remote from the sampling zone of the samples S2 and S3, has never received any products nor chemical effluents before. However, on soils where samples S2 and S3 are collected, are dumped for many years, the chemical effluents of laboratories containing heavy metals (Pb, Ni and Cr). The soils S2 and S3 are collected on two different sites in Central Electro Chemical Research Institute. S2 was collected on the floor where the laboratory of lead battery is located and S3 on the floor where the laboratory of nickel and chromium battery is located.

To better appreciate the percentage of extraction of metals, the soil sample S1 was artificially contaminated with lead on the one hand and, on the other hand, with nickel and chromium. Three samples were reconstituted with S1.

- i) The sample $S1_0$ is the soil sample S1 which has not undergone any artificial addition of heavy metals and is considered like a witness sample for $S1_1$ and $S1_2$,
- ii) The $S1_1$ sample is the soil sample S1 which has been artificially contaminated with lead, and
- iii) The $S1_2$ sample is the soil sample S1 which has been artificially contaminated with nickel and chromium.

All soil samples S1, S2 and S3 were dried in the open air for 48 h and then passed in an oven at 50°C until complete drying. They were then ground and sieved with a sieve of 63 μ to obtain a very fine powder.

Preparation of solutions

Artificial soil contamination $S1_1$ was made by mixing 1% of product and 99% of soil, in terms of mass. The addition of lead, nickel and chromium was made by mixing $S1_1$ with aqueous solutions of lead

acetate (Sample S₁), nickel chloride and potassium dichromate (Sample S₂). Three extractant solutions were prepared: l'ethylenediaminetetra aceticacide (EDTA), Ammonium acetate pure (CH₃COONH₄) and the Calcium chloride dihydrate (CaCl₂·2H₂O). The optimal extraction concentration is determined by preparing for each extractant solution three different concentrations (0.1, 0.2 and 0.3 mol/L). These three concentrations constitute the best extraction concentrations after a series of extraction between 0.05 and 1 mol/L.

Total heavy metals

The total content of heavy metals of the soil samples S₁, S₂ and S₃ was determined by acid attack to aqua regia (1/3 ; HNO₃/HCl).

Single extraction

The extraction of heavy metals was made using the ratio solid/liquid 1:10 (Leleyter et al., 2012). The extractant solutions were adjusted to pH 2, 3 and 4 with pure nitric acid. This is carried out by mixing 50 ml of the complexing solution with 5 g of soil sample under continued magnetic stirring for 2 h at room temperature.

The mixture was then centrifuged at 4000 rev/min for 15 min and filtered through filter porosity 0.45 µm and then stored at 4°C. The extracts were assayed by AAS (Atomic Absorption Spectroscopy). The optimum parameters (pH and concentration) of extraction of heavy metals found with S₁ were applied to the soil samples S₂ and S₃ to determine their state of contamination.

Sequential extraction

The application of the procedure of BCR (The community Bureau of Reference) aims to allocate each pollutant according to three fractions (to which one can add a fourth unextracted called residual fraction) which are characteristic of the mode and the fixing intensity of each pollutant on the compartments of the soil (Ure et al., 1993). Sequential extraction was used only on the soil samples S₂ and S₃. In sequential BCR extraction, the soils samples are treated with a chain of reagents and determined the elemental concentration into fractions, linked with different mineralogical phases (Quevauviller, 2002). The different fractions of the sequential extraction are: The exchangeable and acid-soluble fraction (F1); the reducible fraction (F2); the oxidizable fraction (F3) and the residual fraction (F4). Scheme 1 shows the different steps of the extraction.

RESULTS AND DISCUSSION

Optimization of the concentration extraction

In the literature, some heavy metals are extracted by EDTA at a concentration of 0.05 mol/L (Leleyter et al., 2012). For this work, metals were extracted with the extractant solutions at different concentrations and by varying the pH in order to optimize the target parameters. The optimization was done with three extractant solutions at different concentrations (0.1, 0.2 and 0.3 mol/L). The extraction pH is that of the extraction solution while the single extraction was made with samples S₁ and S₂. The choice of compounds lead nitrate, nickel chloride and potassium dichromate for artificially polluted S₁ is justified by the fact that they are more soluble in aqueous solution

(Lide, 1992). Three tests were needed for each concentration. The following figures show the extraction results.

The results show a better extraction of lead and nickel with EDTA at a concentration of 0.3 mol/L (Figures 1 and 2). However, the extraction of chromium by EDTA is important at a concentration of 0.1 mol/L (Figure 3). These results are in agreement with those of Jean (2007), which found a maximum concentration of 0.1 mol/L of EDTA necessary for a better extraction of Cr. This agent (EDTA) is also used in the determination of bioavailable fraction in soil (Grygo-Szymanko et al., 2015).

Calcium chloride (CaCl₂·2H₂O) has an significant extraction at 0.1 mol/L for the three metals (Pb, Ni and Cr). These results are consistent with those of Lebourg et al. (1996) who has shown that, for a better extraction of heavy metals, the maximum concentration of CaCl₂·2H₂O is 0.1 mol/L and allows a good evaluation of the bioavailability of heavy metals in soils. Ammonium acetate (CH₃COONH₄) meanwhile better extracts the lead with a concentration of 0.1 mol/L. The contents of Ni and Cr are more important with ammonium acetate at a concentration of 0.3 mol/L.

The total contents of the three heavy metals in S₁ and S₂ are respectively 990.60 ± 5.24 mg/kg for lead, 208.42 ± 1.10 mg/kg nickel and 185.68 ± 0.98 mg/kg for chromium. The total contents allowed calculating the extraction percentages of the three components by extractants presented in Table 1.


This percentage is calculated with the best contents (Contents of the optimal concentrations) of the heavy metals of previous extractions (Figures 1, 2 and 3) using the following formula:

$$\% \text{Extract element} = \left(\frac{\text{Metal extracted by Single extraction}}{\text{Metal extracted by acid mineralisation}} \right) \times 100 \quad (1)$$

Through these results (Table 1) we notice that, EDTA extracts better the three heavy metals while compared to the other extractants. This confirms the results of the literature that, EDTA is recognized as a powerful reducing agent and complexing (Forstner, 1993; Finžgar et al., 2007). The EDTA is a powerful complexing which forms with the metal species, the stable and soluble compounds. However, chromium is less extracted with EDTA compared to other metals. This is due to the low affinity of EDTA for the Cr compared to other extractants. Other works have shown that the citric acid has a greater affinity for Cr (Jean, 2007).

Optimization of the pH extraction

The solubility of heavy metals often depends on the variation of certain parameters such as pH (Leleyter and Baraud, 2005). The pH is a very important parameter in

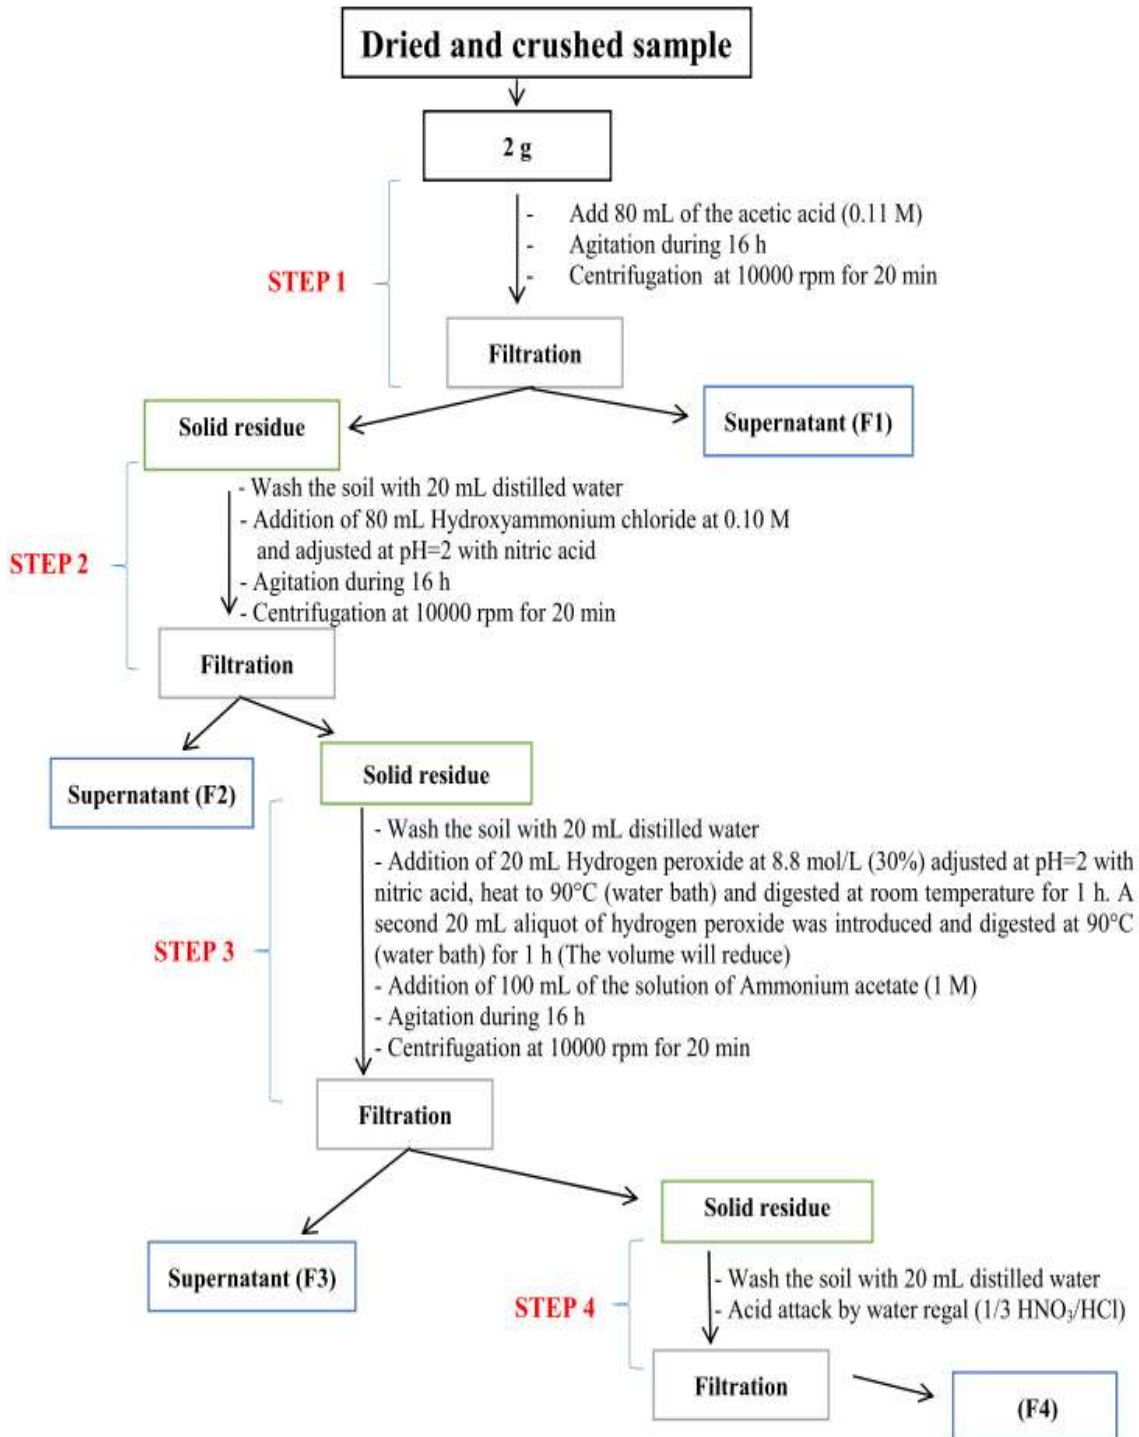

Scheme 1. Different steps of the sequential extraction.

the case of the solubilization process, particularly in the case of heavy metals.

The elements are all the more soluble as the pH decreases. At pH values above 6, the solubilized amounts are very small compared to the total content. Indeed, the optimization is done by varying the pH to 2, 3 and 4 of the

extract solution with the optimal concentrations obtained. The pH is adjusted with nitric acid. This optimization allowed to examine the influence of pH on the release and the solubility of species present in the soil. The following figures show the extraction of heavy metals at various pH values with the optimal contractions extractants.

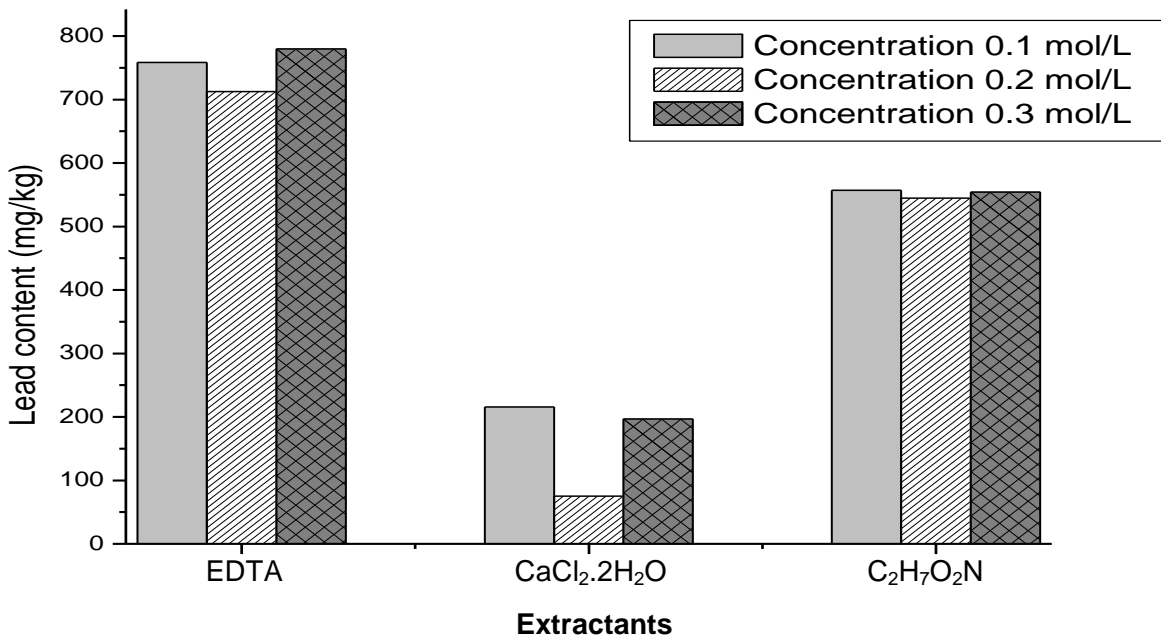


Figure 1. Single extraction of lead at the different concentrations.

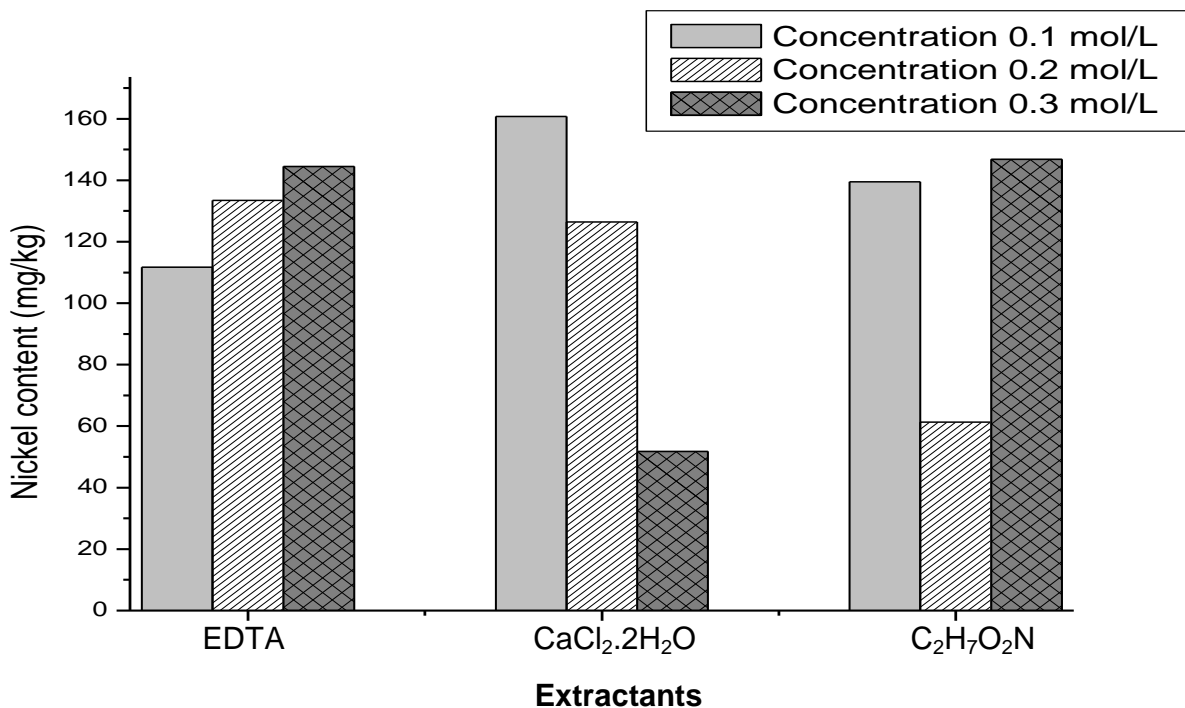


Figure 2. Single extraction of nickel at the different concentrations.

The results show that at a concentration of 0.3 mol/L EDTA, lead and nickel are more extracted at pH 4 (Figures 4 and 5). This is consistent with the results obtained by Oudghiri et al. (2011). On the contrary, at the

same concentration of EDTA, chrome is more extracted at pH 2. The pH optimum extraction of CaCl₂·2H₂O for the three metals is the same (pH 2) (Figures 4, 5 and 6). The Ammonium acetate extracts more lead at pH 2, the

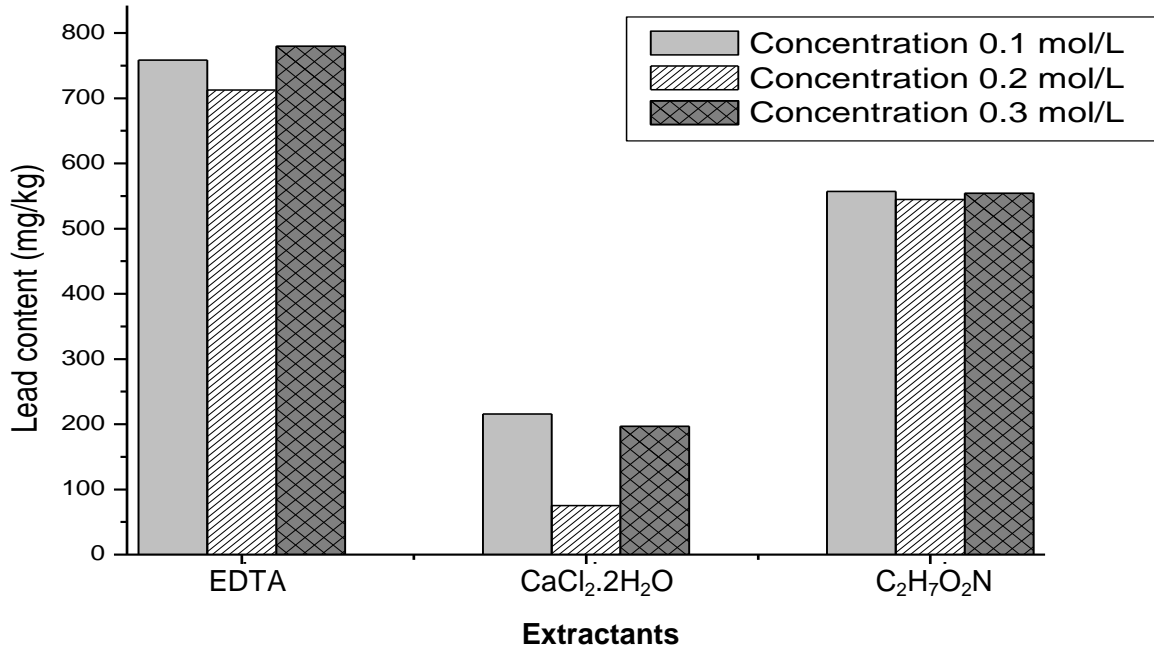


Figure 3. Single extraction of chromium at the different concentrations.

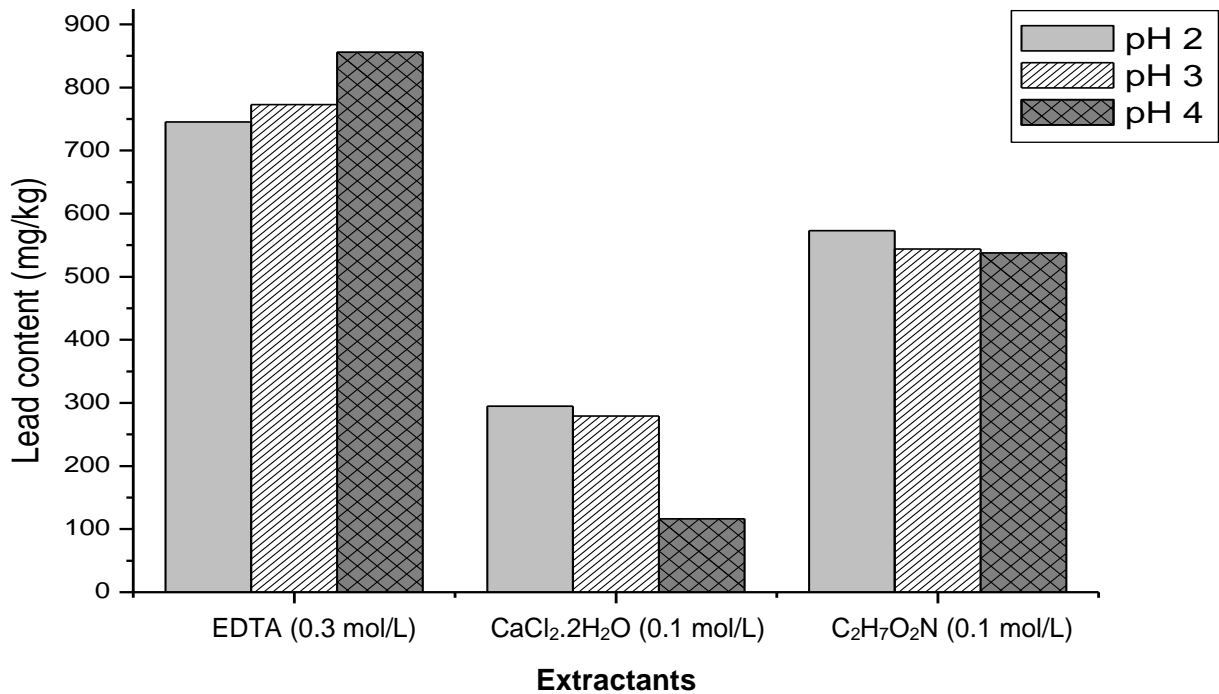


Figure 4. Single extraction of lead at different pH.

nickel and chromium at pH 4. For Mpundu et al. (2013), most metallic elements are mobile in the soil solution at pH <6. The optimum pH is important in the extraction of metals because it is a major factor in the retention of the

metals and it controls all the processes affecting the behavior of these elements (Bourg, 1998). The chemical sensitivity of the materials as a function of pH is an important parameter for determining the solubilization of

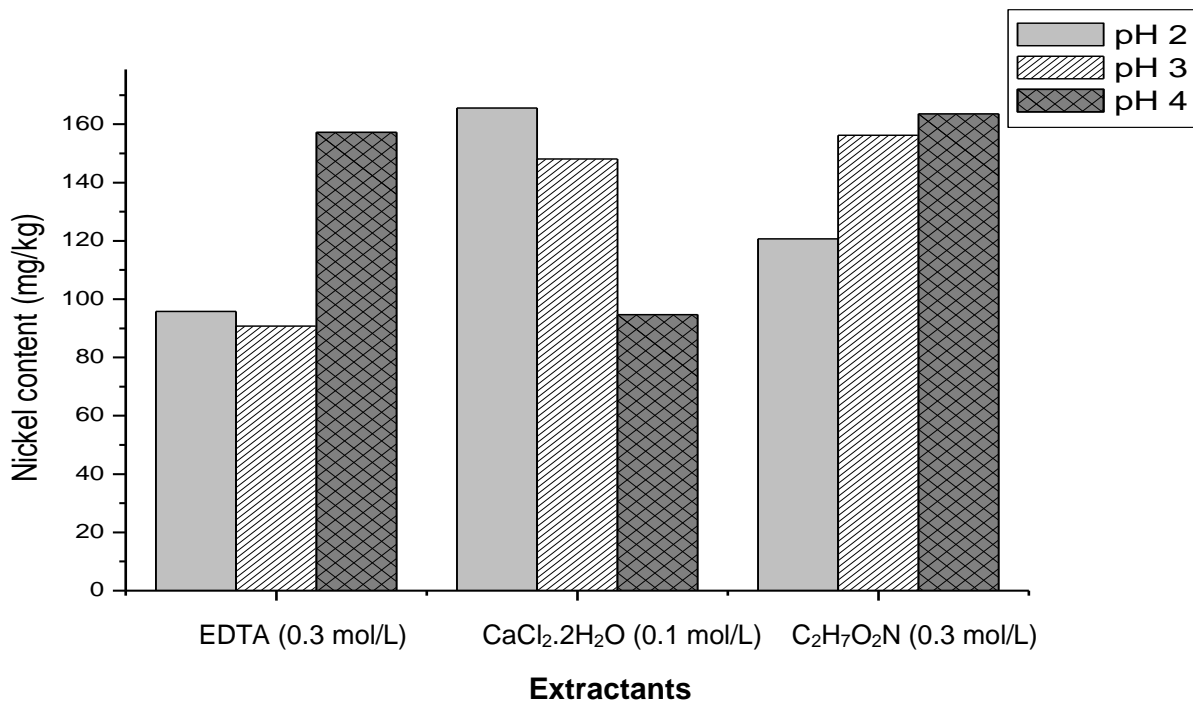


Figure 5. Single extraction of nickel at different pH.

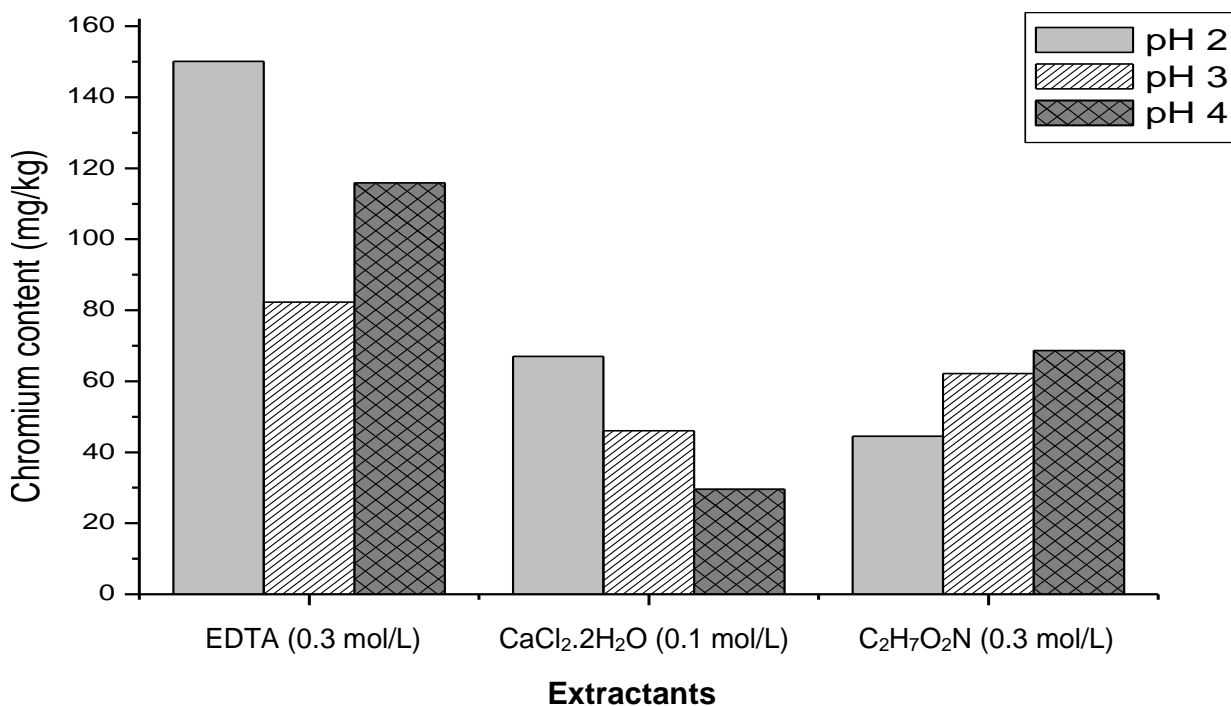


Figure 6. Single extraction of chromium at different pH.

pollutants. The more the pH decreases, the more the elements are soluble (Matera and Hecho, 2001).

The percentage extraction of heavy metals with different extractants and pH varying is calculated in the same way

Table 1. Extraction percentage of heavy metals with different extractants.

| Heavy metals | %Pb | %Ni | %Cr |
|--|-------|-------|-------|
| EDTA | 75.73 | 62.33 | 54.04 |
| CaCl ₂ .H ₂ O | 16.4 | 54.21 | 27.78 |
| C ₂ H ₇ O ₂ N | 55.71 | 55.59 | 25.87 |

Table 2. Extraction percentage of heavy metals with different extractants with the optimal pH.

| Heavy metals | %Pb | %Ni | %Cr |
|--|-------|-------|-------|
| EDTA | 79.88 | 54.99 | 62.54 |
| CaCl ₂ .H ₂ O | 23.23 | 65.3 | 25.6 |
| C ₂ H ₇ O ₂ N | 55.68 | 70.43 | 31.48 |

Table 3. pH and concentrations optimal of heavy metals.

| Heavy metals | Concentration (mol/L)/pH | | |
|--|--------------------------|---------|---------|
| | Pb | Ni | Cr |
| EDTA | 0.3 / 4 | 0.3 / 4 | 0.1 / 2 |
| CaCl ₂ .H ₂ O | 0.1 / 2 | 0.1 / 2 | 0.1 / 2 |
| C ₂ H ₇ O ₂ N | 0.1 / 2 | 0.3 / 4 | 0.3 / 4 |

Table 4. Extraction of metals in the soil S1 with EDTA (0.05 mol/L).

| Metal (mg/kg) | pH 2 | pH 3 | pH 4 |
|---------------|--------|--------|--------|
| Pb | 663.54 | 502.68 | 588.18 |
| Cr | 29.97 | 11.84 | 8.88 |
| Ni | 179.50 | 39.30 | 24.00 |

as before (Table 1). It is especially significant for EDTA than for other extractants. However, the percentage of extraction of lead by EDTA is almost the same as that found by Lydia (Leleyter et al., 2005). The CaCl₂.2H₂O salt appears less aggressive for Pb and Cr as compared to other extractants (Table 2).

Recapitulation of optimizations settings

Table 3 shows the optimum extraction parameters of the three heavy metals. It is found that the optimal concentrations of extractants are not the same for all three heavy metals. Similarly, the optimum pH for maximum solubility of the metal is not the same (Table 3). In order to compare the results with those of the literature, extraction was carried out with EDTA at a concentration of 0.05 mol/L (Kato et al., 2012). Table 4 shows the contractions in mg/kg of extraction with EDTA

(0.05 mol/L) of metals in the soil S1.

Besides nickel extraction at pH 2, all other concentrations (Table 4) are lower than those found with EDTA at concentrations of 0.1, 0.2 and 0.3 mol/L (Figures 4, 5 and 6). These results are not in agreement with some of the literature that says, the optimum concentration of EDTA extraction is 0.05 mol/L. It is noted that most of the results of the literature did not take into account the influence of pH in the extraction of metals. In contrast, for Segues et al. (2004), for highly polluted soils, it is necessary to work with EDTA concentration to 0.3 mol/L but in basic medium.

Application of the optimum parameters

Single extraction

The single extraction of heavy metals with salts

Table 5. Single extraction of metals with the optimal settings of samples S2 and S3.

| Heavy metals | Pb | | Ni | | Cr | |
|--|--------------|-------|--------------|-------|--------------|-------|
| | mg/kg | % | mg/kg | % | mg/kg | % |
| EDTA | 77.63 ± 0.41 | 69.7 | 67.37 ± 0.36 | 84.27 | 60.22 ± 0.32 | 80.86 |
| CaCl ₂ .2H ₂ O | 41.94 ± 0.22 | 37.65 | 46.25 ± 0.24 | 57.85 | 36.00 ± 0.20 | 48.34 |
| C ₂ H ₇ O ₂ N | 52.27 ± 0.28 | 46.93 | 56.01 ± 0.30 | 70.06 | 40.92 ± 0.22 | 54.95 |

(CaCl₂.2H₂O; CH₃COONH₄) allows quantifying the active part of pollution (mobile fraction) and to best represent the intrinsic soil conditions in terms of ionic strength. This simple extraction with EDTA complexing allows better measurement of the mobilized metal fraction and a potentially active part. Indeed, EDTA is a chelating agent having an extractability capacity of metals present in unbound to silica phases, including metals complexed with organic ligands.

The optimum parameters found with the S1 soil samples were applied to soil samples S2 and S3 for the single extraction. Three trials were needed for each soil sample. The total contents of the three metals were also determined by hot acid attack. The total contents in the samples S2 and S3 are respectively 111.38 ± 0.59 mg/kg for lead (Sample S2), 79.95 ± 0.42 mg/kg for nickel and 74.47 ± 0.39 mg/kg for chromium (Sample S3). Compared with AFNOR standard NF U 44-041 (100 mg/kg for lead, 50 mg/kg for nickel and 150 mg/kg for chromium), the lead and nickel contents are higher. The extraction percentages of metals in the Table 1 were calculated on the basis of the total contents.

The rate of extraction of metals using various extractants is high with a maximum of 84.27% of nickel extraction with EDTA and a minimum of 37.65% extraction of lead by CaCl₂.2H₂O (Table 5). The competition phenomena between the elements with the complexing can then take place, thereby limiting the mobilization of Cr and Ni. The treatment of heavy metal contaminated soil specifically Pb, Ni and Cr by three extractants (EDTA, CaCl₂.2H₂O and CH₃COONH₄) would give a better result with the optimization settings application. The extracted contents are much more related to the pollutants solubilization capacity by extractants. As far as the pollution of soils is concerned, we note with regard to the maximum permissible concentrations as defined by CCME 1999 (Vandana et al., 2011) (70 mg/kg for Pb, 50 mg/kg for Ni and 64 mg/kg for Cr) that the total contents of Pb and Ni are higher. It shows a pollution of these two elements in the soils S2 and S3.

The total contents in S1₀ (Witness Sample) are 15.37 ± 0.08 mg/kg for Pb, 8.35 ± 0.04 mg/kg for Ni and undetected for Cr. The low levels recorded in the witness soils show the significant presence of heavy metals in soil S2 and S3 caused by the rejection of chemical influents. The use of extractants such as EDTA and CaCl₂.2H₂O

allowed highlighting respectively the mobilizable fraction and the movable portion of the soil matrix. This extraction shows that the proportion of the mobilizable fraction of the soils S2 and S3 is between 37 and 84% (Table 5). These proportions are high compared to the work of Kebir (2012).

Sequential extraction

The sequential extraction was performed on the samples S2 and S3 (Pb in S2, Ni and Cr in S3) to estimate the importance of the mobilized fraction (or "labile") of metals in the soils studied. The sequential extraction used comprises four fractions according to BCR:

- i) The exchangeable and acid soluble fraction (F1), extracted by the acetic acid solution contain the heavy metals that are easily mobilizable.
- ii) The reducible fraction (F2), extracted by the solution of hydrochlorure of hydroxylamine contains metals bound to the oxides that can be also mobilizable.
- iii) The oxidizable fraction (F3), extracted with the peroxide of hydrogen and the solution of ammonium acetate contains metals bound to the organic matter, which can be released under oxidising conditions.
- iv) The residual fraction (F4).

All metals studied are found in the four retention functions listed in the Protocol to BCR (Figure 7). It is noted that the exchangeable and acid-soluble fraction (F1) of the three metals is greater and exceeds 50%. This exchangeable and acid soluble fractions extracted by the acetic acid solution contain the heavy metals that are easily mobilizable. This result for the nickel does not comply with certain works of literature which state that the nickel is preferentially absorbed by the clays, the oxides of iron and manganese and can substitute for manganese in clay minerals of the soil. The formation of complexes of Ni with both inorganic and organic ligands will increase Ni mobility in soils (McLean and Bledsoe, 1992).

The reducible fraction (F2) extracted by the solution of hydrochlorure of hydroxylamine contains metals bound to the oxides that can be also mobilizable. It represents the second most important fraction extracted for the three metals (between 21 and 38%) (Figure 7). These results

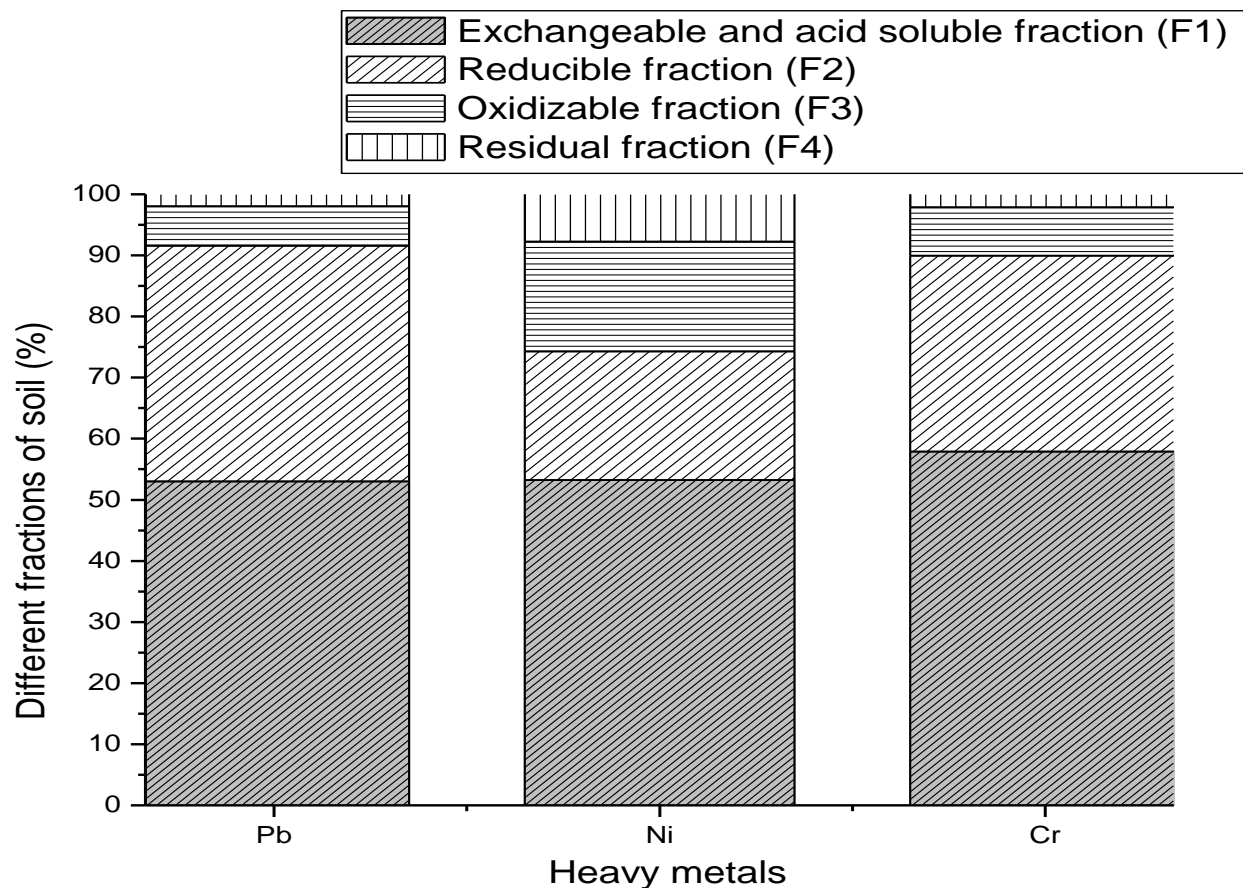


Figure 7. Heavy metals distribution in the different fractions of the samples S2 (Pb) and S3 (Ni and Cr).

are not consistent with those of Katoh et al. (2012), who demonstrated that the fraction bound to oxide is higher particularly for lead. The oxidizable fraction (F3) extracted with the peroxide of hydrogen and the solution of ammonium acetate contains metals bound to the organic matter. It is present at a low rate compared to the previous two fractions. The residual fraction (F4) is gotten after acidic attack of the residue of the oxidizable fraction. This fraction extracted is estimated between 1 and 7% (Figure 7). Its strong proportion in the residual fraction will entail a weak mobility of this element in the samples because, the residual fraction contains the metals that are little likely to be loosened in the normal environmental conditions (Bodjona et al., 2012; Leleyter et al., 1999). The metals present in the matrix of soil, often behave differently according to their position in the different fractions. In some compartments of soils like the example of the oxidizable fractions (F3) and residual (F4), metals are bound solidly, which makes their solubilization difficult. On the other hand, in other exchangeable, acid soluble fractions (F1) and reducible fraction (F2), metals are weakly absorbed and can be easily mobilized. However, we quantified the portion of metals contained in the F1 and F2 fractions in order to estimate the risks of

the immediate pollution. This portion is 91.58% for lead, 74.27% for nickel and 89.93% for chromium. Besides, those heavy metals have very elevated pollution risks in the studied soils. These results confirm the proportion of the mobilizable fraction recovered with the use of EDTA as an extractant (Table 5). However, only a few studies have compared the amount of heavy metal extracted with EDTA and the amount of sequential extraction (Cid et al., 2002).

A check on the results of BCR sequential extraction procedure was performed by comparing the sum of the four fractions (F1, F2, F3 and F4) with the total concentrations of heavy metal from digestion procedure. The detailed calculations were expressed as follows:

$$\% \text{Recovery} = \left(\frac{F1+F2+F3+F4}{\text{Total concentration}} \right) \times 100 \quad (2)$$

This estimation approach of the percentage of recovery of the studied elements will enable a judgment on the effectiveness of extractants used and the margin of error made during the extraction of these metals. The protocol used allowed to extract more than 68% of metals from their total fraction (Table 6).

Table 6. Percentage recovery of heavy metals.

| Metal | Total Concentration (mg/kg) | F1 + F2 +F3 +F4 (mg/kg) | %Recovery |
|-------|-----------------------------|-------------------------|-----------|
| Pb | 111.38 | 93.29 | 83.76 |
| Ni | 79.95 | 69.58 | 87.02 |
| Cr | 74.47 | 50.84 | 68.27 |

Conclusion

Few works bring out the pH in the extraction of heavy metals. This work has led not only to find the optimal extraction concentration of lead, nickel and chromium but also the optimum extraction pH. The application of these optimum parameters on the contaminated soils samples of Central Electro-Chemical Research Institute, allowed to extract an important amount of heavy metals with a maximum of 84.27% of the total content.

However, the extractant $\text{CaCl}_2 \cdot 2\text{H}_2\text{O}$ is less aggressive in the extraction of metals. On the other hand, EDTA turns out to be a good agent extractant with a rate of up to 79%. The sequential extraction shows a significant proportion of potentially mobilizable fraction of metals in the soil matrix. Through these results, it appears that, the recovery percentage is higher in the sequential extraction method than in the simple extraction method.

Compared with AFNOR standard NF U 44-041, the lead and nickel contents are higher in the soils studied. The high proportion of the mobilizable fraction of heavy metals in contaminated soils, prove the risk of pollution of this soils.

CONFLICT OF INTERESTS

The authors have not declared any conflict of interests.


ACKNOWLEDGEMENTS

This research was conducted at CSIR-CECRI, thanks to the postdoctoral fellowship CV RAMAN of Indian Government. Thanks to the Indian Government.

REFERENCES

- Alloway BJ (1995). Heavy metals in soils, 2nd ed. Blackie Academic and Professional, Glasgow. pp. 206-220.
- Bodjona BM, Kili AK, Tchegueni S, El Meray M, Kennou B, Koriko M, Tchangbedji G (2012). Accumulation of heavy metals in the soil at the final discharge site of the city of Lomé. *Int. J. Environ. Sci. Manage. Eng. Res.* 1(4):136-146.
- Bourg ACM (1998). Metals in aquatic and terrestrial systems : sorption, speciation and mobilization. *Chemistry and biology of solid waste*, Edition Springer-Verlag. pp. 3-30.
- Cid BP, Gonzalez MJ, Gomez EF (2002). Comparison of single extraction procedures, using either conventional shaking or microwave heating, and the Tessier sequential extraction method for the fractionation of heavy metals from environmental samples. *Analyst.* 127:681-688.
- Finžgar N, Leštan D (2007). Multi-step leaching of Pb and Zn contaminated soils with EDTA. *Chemosphere* 66:824-832.
- Forstner U (1993). Metal speciation: general concepts and applications. *Int. J. Environ. Anal. Chem.* 51:5-23.
- Garrabrants AC, Kosson DS (2000). Use of a chelating agent to determine the metal availability for leaching from soils and wastes. In: *Waste Management.* 20:155-165.
- Grygo-Szymanko E, Tobiasz A, Walas S (2015). Speciation analysis and fractionation of manganese. *Trends in Analytical Chemistry.* <http://dx.doi.org/doi: 10.1016/j.trac.2015.09.010>. 01-36.
- Jamali MK, Kazi, TG, Arain MB, Afridi HI, Jalbani N, Kandhro GA, Shah AQ, Baig JA (2009). Speciation of heavy metals in untreated sewage sludge by using microwave assisted sequential extraction procedure. *J. Hazard. Mater.* 163:1157-1164.
- Jean L (2007). Mobilisation du chrome et du nickel à partir de sols contaminés, en présence de complexants : Transfert et accumulation de ces métaux chez *Datura innoxia*. Thèse de Doctorat de l'Université de Limoges. pp. 109-113.
- Katoh M, Masaki S, Sato T (2012). Single-Step Extraction to Determine Soluble Lead Levels in Soil. *Int. J. GEOMATE.* 3(2):375-380.
- Kebir T (2012). Etude de contamination, d'accumulation et de mobilité de quelques métaux lourds dans des légumes, des fruits et des sols agricoles situés près d'une décharge industrielle de l'usine Alzinc de la ville de Ghazaouet. Thèse de doctorat à l'Université ABOU BEKR BELKAID -TLEMCCEN-
- Lebourg A, Sterckeman T, Ciesielski H, Proix N (1996). Intérêt de différents réactifs d'extraction chimique pour l'évaluation de la biodisponibilité des métaux en traces du sol. *Agronomie, EDP Sciences* 16(4):201-215.
- Leleyter L, Rousseau C, Biree L, Baraud F (2012). Comparison of EDTA, HCl and sequential extraction procedures, for selected metals (Cu, Mn, Pb, Zn), in soils, riverine and marine sediments. *J. Geochem. Explor.* 116-117, 51-59.
- Leleyter L, Baraud F (2005). Evaluation of metals mobility in sediments of the Vire basin (Normandy, France) by single or sequential extractions. *Comptes Rendus Geoscience.* 337:571-579.
- Leleyter L, Probst JL (1999). A new sequential extraction procedure for the speciation of particulate trace elements in river sediments. *International J. Environ. Anal. Chem.* 73(2):109-128
- Lide DR (1992). (éd.). *CRC handbook of chemistry and physics.* 73^e éd. CRC Press Inc., Boca Raton, FL.
- Matera V, LE Hecho I (2001). Arsenic behavior in contaminated soils: mobility and speciation. In *Heavy metals release in soils.* Lewis Publishers. 207-235.
- McLean JE, Bledsoe BE (1992). Behavior of metals in soils. *Ground Water Issue.* EPA/540/S-92/018 October 1992.
- Muhammad BA, Tasneem GK, Jamali MK, Jalbani N, Afridi HI, Baig JA (2008). Speciation of heavy metals in untreated sewage sludge by using microwave assisted sequential extraction procedure. *J. Hazard. Mater.* 154:998-1006.
- Mpundu MM, Useni SY, Mwamba MT, Kateta MG, Mwansa M, Ilunga K, Kamengwa KC, Kyungu K, Nyembo KL (2013). Teneurs en éléments traces métalliques dans les sols de différents jardins potagers de la ville minière de Lubumbashi et risques de contamination des cultures potagères. *Journal of Applied Biosciences.* 65:4957-4968.
- Oudghiri F, Rodríguez RB, García MJL, EL Mounni B (2011). Décontamination des sédiments marins pollués en métaux lourds par extraction en milieu complexant. Conférence Méditerranéenne

- Côtière et Maritime EDITION 2, TANGER, MAROC.
- Quevauviller P (2002). Operationally-defined extraction procedures for soil and sediment analysis. Part 3. New CRMs for trace-element extractable contents. *Trend Anal. Chem.* 21:774-785.
- Segues C, Tellier S, Astruc M (2004). Michel Treatment Of Industrial Soils Contaminated With Metals And Arsenic By Extractions With Complexing Agents. Scientific registration n°: 2004 Symposium n°: 38, Université de Pau et des Pays de l'adour, France.
- Ure AM, Quevauviller P, Muntau H, Griepink B (1993). Speciation of heavy metals in soils and sediments. An account of a improvement and harmonization of extraction techniques under auspices of the BCR of the commission of European communities. *Int. J. Environ. Anal. Chem.* 51:135-152.
- Vandana P, Murthy NN, Saxena PR (2011). Assessment of heavy metal contamination in soil around hazardous waste disposal sites in Hyderabad city (India): natural and anthropogenic implications. *E3 J. Environ. Res. Manage.* 2(2):027-034.



Journal of Environmental Chemistry and Ecotoxicology

Related Journals Published by Academic Journals

- *African Journal of Pure and Applied Chemistry*
- *International Journal of Physical Sciences*
- *Journal of Geology and Mining Research*
- *African Journal of Mathematics and Computer Science Research*
- *Journal of Internet and Information Systems*
- *Journal of Oceanography and Marine Science*
- *Journal of Petroleum Technology and Alternative Fuels*

academicJournals