

OPEN ACCESS

A photograph of a bundle of multi-colored cables (red, blue, green, yellow, orange, purple) tied together with a metal padlock. The padlock is brass and is locked. The cables are bundled together and looped over the padlock. The background is a solid red color.

# International Journal of **Physical Sciences**

30 March 2018  
ISSN 1992-1950  
DOI: 10.5897/IJPS  
[www.academicjournals.org](http://www.academicjournals.org)

**academicJournals**



Academic  
Journals

# ABOUT IJPS

The **International Journal of Physical Sciences (IJPS)** is published weekly (one volume per year) by Academic Journals.

**International Journal of Physical Sciences (IJPS)** is an open access journal that publishes high-quality solicited and unsolicited articles, in English, in all Physics and chemistry including artificial intelligence, neural processing, nuclear and particle physics, geophysics, physics in medicine and biology, plasma physics, semiconductor science and technology, wireless and optical communications, materials science, energy and fuels, environmental science and technology, combinatorial chemistry, natural products, molecular therapeutics, geochemistry, cement and concrete research, metallurgy, crystallography and computer-aided materials design. All articles published in IJPS are peer-reviewed.

## Contact Us

**Editorial Office:** [ijps@academicjournals.org](mailto:ijps@academicjournals.org)

**Help Desk:** [helpdesk@academicjournals.org](mailto:helpdesk@academicjournals.org)

**Website:** <http://www.academicjournals.org/journal/IJPS>

**Submit manuscript online** <http://ms.academicjournals.me/>

## Editors

### **Prof. Sanjay Misra**

*Department of Computer Engineering, School of Information and Communication Technology  
Federal University of Technology, Minna,  
Nigeria.*

### **Prof. Songjun Li**

*School of Materials Science and Engineering,  
Jiangsu University,  
Zhenjiang,  
China*

### **Dr. G. Suresh Kumar**

*Senior Scientist and Head Biophysical Chemistry  
Division Indian Institute of Chemical Biology  
(IICB)(CSIR, Govt. of India),  
Kolkata 700 032,  
INDIA.*

### **Dr. Remi Adewumi Oluyinka**

*Senior Lecturer,  
School of Computer Science  
Westville Campus  
University of KwaZulu-Natal  
Private Bag X54001  
Durban 4000  
South Africa.*

### **Prof. Hyo Choi**

*Graduate School  
Gangneung-Wonju National University  
Gangneung,  
Gangwondo 210-702, Korea*

### **Prof. Kui Yu Zhang**

*Laboratoire de Microscopies et d'Etude de  
Nanostructures (LMEN)  
Département de Physique, Université de Reims,  
B.P. 1039. 51687,  
Reims cedex,  
France.*

### **Prof. R. Vittal**

*Research Professor,  
Department of Chemistry and Molecular  
Engineering  
Korea University, Seoul 136-701,  
Korea.*

### **Prof Mohamed Bououdina**

*Director of the Nanotechnology Centre  
University of Bahrain  
PO Box 32038,  
Kingdom of Bahrain*

### **Prof. Geoffrey Mitchell**

*School of Mathematics,  
Meteorology and Physics  
Centre for Advanced Microscopy  
University of Reading Whiteknights,  
Reading RG6 6AF  
United Kingdom.*

### **Prof. Xiao-Li Yang**

*School of Civil Engineering,  
Central South University,  
Hunan 410075,  
China*

### **Dr. Sushil Kumar**

*Geophysics Group,  
Wadia Institute of Himalayan Geology,  
P.B. No. 74 Dehra Dun - 248001(UC)  
India.*

### **Prof. Suleyman KORKUT**

*Duzce University  
Faculty of Forestry  
Department of Forest Industrial Engineering  
Beciyorukler Campus 81620  
Duzce-Turkey*

### **Prof. Nazmul Islam**

*Department of Basic Sciences &  
Humanities/Chemistry,  
Techno Global-Balurghat, Mangalpur, Near District  
Jail P.O: Beltalpark, P.S: Balurghat, Dist.: South  
Dinajpur,  
Pin: 733103,India.*

### **Prof. Dr. Ismail Musirin**

*Centre for Electrical Power Engineering Studies  
(CEPES), Faculty of Electrical Engineering, Universiti  
Teknologi Mara,  
40450 Shah Alam,  
Selangor, Malaysia*

### **Prof. Mohamed A. Amr**

*Nuclear Physic Department, Atomic Energy Authority  
Cairo 13759,  
Egypt.*

### **Dr. Armin Shams**

*Artificial Intelligence Group,  
Computer Science Department,  
The University of Manchester.*

# Editorial Board

**Prof. Salah M. El-Sayed**

*Mathematics. Department of Scientific Computing,  
Faculty of Computers and Informatics,  
Benha University. Benha ,  
Egypt.*

**Dr. Rowdra Ghatak**

*Associate Professor  
Electronics and Communication Engineering Dept.,  
National Institute of Technology Durgapur  
Durgapur West Bengal*

**Prof. Fong-Gong Wu**

*College of Planning and Design, National Cheng Kung  
University  
Taiwan*

**Dr. Abha Mishra.**

*Senior Research Specialist & Affiliated Faculty.  
Thailand*

**Dr. Madad Khan**

*Head  
Department of Mathematics  
COMSATS University of Science and Technology  
Abbottabad, Pakistan*

**Prof. Yuan-Shyi Peter Chiu**

*Department of Industrial Engineering & Management  
Chaoyang University of Technology  
Taichung, Taiwan*

**Dr. M. R. Pahlavani,**

*Head, Department of Nuclear physics,  
Mazandaran University,  
Babolsar-Iran*

**Dr. Subir Das,**

*Department of Applied Mathematics,  
Institute of Technology, Banaras Hindu University,  
Varanasi*

**Dr. Anna Oleksy**

*Department of Chemistry  
University of Gothenburg  
Gothenburg,  
Sweden*

**Prof. Gin-Rong Liu,**

*Center for Space and Remote Sensing Research  
National Central University, Chung-Li,  
Taiwan 32001*

**Prof. Mohammed H. T. Qari**

*Department of Structural geology and remote sensing  
Faculty of Earth Sciences  
King Abdulaziz UniversityJeddah,  
Saudi Arabia*

**Dr. Jyhwen Wang,**

*Department of Engineering Technology and Industrial  
Distribution  
Department of Mechanical Engineering  
Texas A&M University  
College Station,*

**Prof. N. V. Sastry**

*Department of Chemistry  
Sardar Patel University  
Vallabh Vidyanagar  
Gujarat, India*

**Dr. Edilson Fereda**

*Graduate Program on Knowledge Management and IT,  
Catholic University of Brasilia,  
Brazil*

**Dr. F. H. Chang**

*Department of Leisure, Recreation and Tourism  
Management,  
Tzu Hui Institute of Technology, Pingtung 926,  
Taiwan (R.O.C.)*

**Prof. Annapurna P.Patil,**

*Department of Computer Science and Engineering,  
M.S. Ramaiah Institute of Technology, Bangalore-54,  
India.*

**Dr. Ricardo Martinho**

*Department of Informatics Engineering, School of  
Technology and Management, Polytechnic Institute of  
Leiria, Rua General Norton de Matos, Apartado 4133, 2411-  
901 Leiria,  
Portugal.*

**Dr Driss Miloud**

*University of mascara / Algeria  
Laboratory of Sciences and Technology of Water  
Faculty of Sciences and the Technology  
Department of Science and Technology  
Algeria*

**Prof. Bidyut Saha,**

*Chemistry Department, Burdwan University, WB,  
India*

# International Journal of Physical Sciences

Table of Contents: Volume 13 Number 6, 30 March, 2018

## ARTICLES

- A comparative study of Nigerian GNSS Reference Network's – Global Positioning System (NIGNET's-GPS) vertical Total Electron Content (vTEC) measurements with the International Reference Ionosphere - Total Electron Content (IRI-TEC) predictions over Calabar, Nigeria** 90  
Joseph Obu, Eucharia Okoro and Sivla William
- Comparative study of commercial gas with biogas produced from co-digestion of corn cob, rice chaff, goat and dog dungs** 98  
Okolie N. P., Onifade A. K., Oladunmoye M. K. and Adegunloye D. V.

*Full Length Research Paper*

# A comparative study of Nigerian GNSS Reference Network's – Global Positioning System (NIGNET's-GPS) vertical Total Electron Content (vTEC) measurements with the International Reference Ionosphere - Total Electron Content (IRI-TEC) predictions over Calabar, Nigeria

Joseph Obu<sup>1</sup>, Eucharia Okoro<sup>2\*</sup> and Sivla William<sup>2</sup>

<sup>1</sup>Department of Physics, University of Calabar, Cross River State, Nigeria

<sup>2</sup>Department of Physics and Astronomy, University of Nigeria, Nsukka, Enugu State, Nigeria.

Received 7 December, 2017; Accepted 27 February, 2018

A study of the vertical Total Electron Content (vTEC) values as measured by the Nigerian GNSS Reference Network's (NIGNET's) GPS receiver in Calabar with geographic coordinates: 4.95°N, 8.32°E and geomagnetic coordinates: 6.46°N, 81.59°E has been carried out for some selected days in the year 2013. The results obtained are compared with the corresponding predictions of the three topside options for the TEC predictions (NeQuick, IRI01-cor, and the IRI 2001) of the International Reference Ionosphere (IRI) model (version 2012) over Calabar region. Despite some gaps in the measured vTEC values by the GPS receiver in Calabar, the results of this research shows high hourly and diurnal correlation of about 0.9 with the IRI-vTEC predictions for the days examined; thus supporting the viability of the receiver as a vTEC measuring device. The NeQuick option gives the best topside representation for the region.

**Key words:** Nigerian GNSS Reference Network's – Global Positioning System (NIGNET's-GPS) Receiver, vertical Total Electron Content (vTEC), International Reference Ionosphere (IRI)-Model.

## INTRODUCTION

Total electron content (or TEC), an important descriptive quantity in space weather studies, is the total number of

electrons in the ionosphere integrated between two points, along a tube of cross-sectional area of one meter

\*Corresponding author. E-mail: [eucharia.okoro@unn.edu.ng](mailto:eucharia.okoro@unn.edu.ng).

squared. Its unit is often given in multiples of the TEC unit (TECU), defined as  $1 \text{ TECU} = 10^{16} \cdot \text{m}^{-2}$  (Hofmann-Wellenhof et al., 2001). Because of its dispersive nature, the total electron content in the ionosphere is significant in determining the scintillation and frequency-dependent group and phase delays of radio waves through the medium. These observed carrier phase delays of received radio signals transmitted from satellites are manifested in the ionosphere above the equatorial ionization anomaly (EIA) regions, due to the high background electron density coupled with its rapid and complex variation (Guoqi et al., 2013). The magnitude and variation of TEC is related to the local time, solar activity, geomagnetic conditions, region of the earth and other sudden space weather events. Some researchers have estimated vertical Total Electron Content parameters using a single-frequency approach of Global Navigation Satellite System data and thereafter compared their results with those obtained from dual frequency measurements (e.g. Zhang et al., 2017; Win et al., 2016; Rao, 2017; Torben and Olushola, 2013).

Consequently, some other authors have carried out comparative studies on GPS TEC variations and International Reference Ionosphere (IRI) predictions for other regions in Nigeria. These include studies by Adewale et al. (2011), Okoh et al. (2011), Rabiou et al. (2011) and Okoh et al. (2012, 2015). As a follow-up to some of their recommendations, we have carried out a study of the vertical total electron content (vTEC) values as measured by the NIGNET's (Nigerian GNSS Reference Network) GPS receiver in Calabar, Nigeria (Geographic coordinates: 4.95°N, 8.32°E; Geomagnetic coordinates: 6.46°N, 81.59°E) for the year 2013. The results obtained were compared with the corresponding prediction of the three topside options for TEC predictions (NeQuick, IRI01-cor, and the IRI2001) of the International Reference Ionosphere (IRI) model (version 2012) over Calabar region.

The International Reference Ionosphere (IRI) is an empirical model developed (globally) to predict parameters in respect to radio propagation through the ionosphere. Some of these parameters include vertical profiles of electron density, electron and ion temperatures and the relative share of the different positive ions, vertical electron content, and F1 and spread-F probability. IRI is a working group, jointly sponsored by the Committee on Space Research (COSPAR) and the International Union of Radio Science (URSI). It is generally regarded as the international standard for specifying ionospheric parameters (Bilitza, 2001; Bilitza and Reinisch, 2008; Bilitza and McKinnell, 2011; Okoh et al., 2012). In addition, as posited by Adewale et al. (2011), the accuracy of the IRI model on the specific region and/or time high since it is a data based model.

IRI has several applications in areas such as aerospace-based engineering endeavours, space weather (through the provision of real-time atmospheric

parameters), and visualization tools for educational purposes (Oyeyemi, 2014).

Our motivation for this work stems from the fact that, since the installation of NIGNET's GPS receiver in Calabar in 2011, no study has been carried out to evaluate its viability for the measurement of the vertical Total Electron Content (vTEC) over the Calabar region. In addition, we believe that the work will help fill the knowledge gap in modelling and predicting TEC values in the equatorial region using the IRI model. Again, this increase in knowledge of the ionosphere, especially for the African equatorial region, will enhance global efforts aimed at correcting ionospheric influences on the radio signals propagating through the region.

## DATA SOURCES AND METHOD OF ANALYSIS

### vTec from the IRI model

The three topside options for TEC predictions, namely; NeQuick, IRI01-corr, and the IRI2001 of the International Reference Ionosphere IRI (2012) model were used to obtain the predicted values of TEC over the Calabar region. In the modelling, the following optional parameters; sunspot numbers (Rz12), F10.7 radio flux (daily and 81-day), and the ionospheric index (IG12) were not specified, while the foF2 storm model was switched on. The upper limit for electron content was set at 1500 km.

### vTec from GPS receivers

The GPS data used for this work were obtained from the Nigerian GNSS Reference Network (NIGNET) project, established in 2008 by the Office of the Surveyor General of Nigeria (Jatau et al., 2010). The network consists of the state-of-the-art CORS (Continuously Operating Reference Station) GNSS (Global Navigation Satellite Systems) equipment, and is intended to implement the new fiducial geodetic network of Nigeria. In other words, NIGNET is expected to directly contribute for the AFREF (African Reference France) project.

Apart from the above stated objectives, the NIGNET system also has the capability to acquire real-time ionospheric GPS data such as vTEC amongst others, in RINEX (Receiver Independent Exchange) format, which allows the user to post-process and get results that are more accurate.

The post-processing and analysis of the RINEX data was carried out using GPS\_Gopi\_v2.9.3, a GPS\_TEC analysis application developed by Dr. Gopi Seemala of the Indian Institute of Geomagnetism (IIG), Navi Mumbai, India (Seemala, 2014).

The NIGNET GPS receivers measure pseudoranges and carrier phases at L1 (1575.42 MHz) and L2 (1227.60 MHz) and operates on two different carrier frequencies, namely, f1 and f2. These frequencies are derived from the fundamental frequency fo = 10.23 MHz, that is, f1 = 154fo and f2 = 154fo. The GPS receivers being a dual-frequency receiver measures the difference in ionospheric delay between the L1 and L2 signal. The group delay for a dual-frequency receiver is given by Ya'acob and Idris (2012).

$$\Delta P = P_2 - P_1 = 40.3 \text{TEC} \left[ \frac{1}{f_2^2} - \frac{1}{f_1^2} \right] \quad (1)$$

Where  $P_1$  and  $P_2$  are the group path lengths, and  $f_1$  and  $f_2$  are the

corresponding high and low frequencies respectively. The total electron content (TEC) is thus obtained from Equation 1 as follows:

$$TEC = \frac{1}{40} \left[ \frac{f_1^2 f_2^2}{f_1^2 - f_2^2} \right] (P_2 - P_1) \quad (2)$$

The TEC value obtained from Equation 2 is called the slant TEC (sTEC), and it is a measure of the total electron content of the ionosphere along the geometrical path taken by the signal from the satellite to the receiver. Its measurement is based on the model that the ionosphere is a spherical shell at fixed height given by the centre of mass of the ionospheric profile at 600 km above the earth's surface.

The vertical total electron content (vTEC) is obtained from the sTEC values by using an appropriate mapping function given by Ya'acob and Idris (2012):

$$vTEC = sTEC(\cos \chi^1) \quad (3)$$

where  $\chi^1$  is the zenith angle at the ionospheric piece point (IPP), which is the user line of sight to the tracked satellite.

## RESULTS AND DISCUSSION

### Half-hourly variation

The plots of the half-hourly variation of the three different topside options of the IRI model and the corresponding GPS-TEC values for the selected days: 31<sup>st</sup> January, 28<sup>th</sup> February, 30<sup>th</sup> March, 30<sup>th</sup> April, 31<sup>st</sup> May, 30<sup>th</sup> June, 15<sup>th</sup> July, 30<sup>th</sup> September, 31<sup>st</sup> October, 30<sup>th</sup> November, and 31<sup>st</sup> December, 2013 were generated. Apart from July 15<sup>th</sup>, these dates were selected on the basis of their being the last of each month for the year under study. July 15<sup>th</sup> was selected because it was the only date having a complete data for that month, while no data was recorded by the receiver in August. The results obtained are as shown in Figures 1(a – k).

As can be seen from Figures (1a – k), the trend of both the GPS and the three IRI models are quite similar, albeit with some slight disparities. Consequently, for all the eleven days considered, the TEC values were higher during daytime compared to night-time with the TEC values increasing abruptly from dawn (0600 h), reaching peak values during the period 1400 - 1700 h (UT) before falling abruptly at dusk (1800 h). These maxima coincide with the time suggested for high solar ionization activity in the ionosphere, and agrees with similar studies carried out for other regions in Nigeria by Adewale et al. (2011), Okoh et al. (2011), Rabiou et al. (2011) and Okoh et al. (2012).

In order to further elucidate the comparative variations of vTEC from GPS and IRI models (through similarities in trends and profiles, and how close the values are), we calculated the correlation coefficients (Table 1), the root-mean square deviations (RMSD), and also the percentage

root-mean-square deviations (%RMSD) (Table 2) of the IRI-TEC values from the GPS-TEC values for the eleven days using the standard algebraic expressions for evaluating these quantities. The results as shown in Table 1 inferred that there is a very high correlation coefficient (in most cases, of about 0.9) between the GPS TEC values and all the three topside options. In addition, the root-mean-square deviations were relatively low, ranging from 19 to 31% for the nequick option, 16 to 36% for the IRI 2001 option, and 17 to 58% for the IRI 01-cor option. These high correlation coefficients and relatively low RMSDs between the GPS and IRI TEC values thus support the use of IRI model to predict the GPS TEC measurements over Calabar region.

### Year-round day-to-day variations

The plots illustrating the year-round day-to-day variations of the GPS TEC and IRI model-predicted TEC values at dawn (0006 UT), mid-day (0011 UT), dusk (1700 UT), and mid-night (2300 UT) are given in Figures 2a to 2d. The hourly correlation coefficients and the corresponding RMSD and %RMSDs for all the days of the year are presented in Tables 3a and 3b respectively.

## Conclusion

We have carried out a comparative study of NIGNET'S GPS vTEC measurements with the three topside IRI - vTEC predictions over Calabar, Nigeria for the year 2013. The results obtained show that despite some gaps in the measured vTEC values by the GPS receiver in Calabar, there is a high hourly, and diurnal correlation (about 0.9) between it and the IRI-vTEC predictions for the days examined. This strongly supports the viability and use of the receiver as a vTEC measuring device. Furthermore, of the three topside options, the NeQuick option gave the best topside representation for the region.

In other to validate the predictive value of the IRI model over Calabar region, similar work should be carried out in the same area. This will help to determine an agreeable upper integration height for the IRI models for which the RMSDs from the GPS-TEC values are minimal. In addition, studies should be carried out in the region during years of high solar activity.


## CONFLICT OF INTERESTS

The authors have not declared any conflict of interests.


## ACKNOWLEDGEMENTS

The authors express profound gratitude to the Nigerian




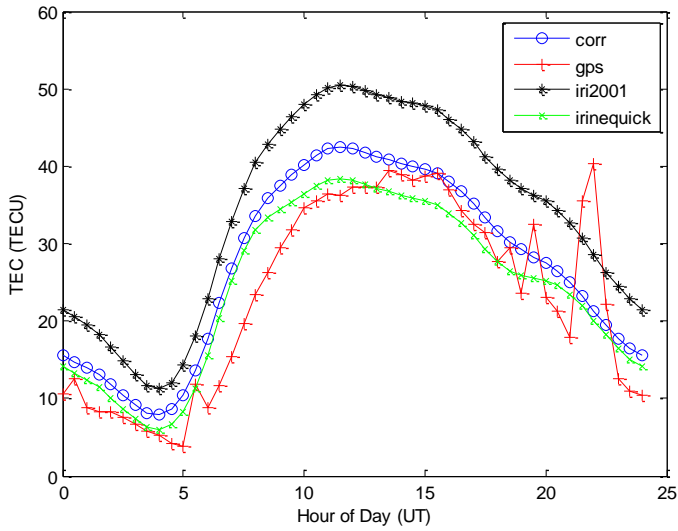


(a)

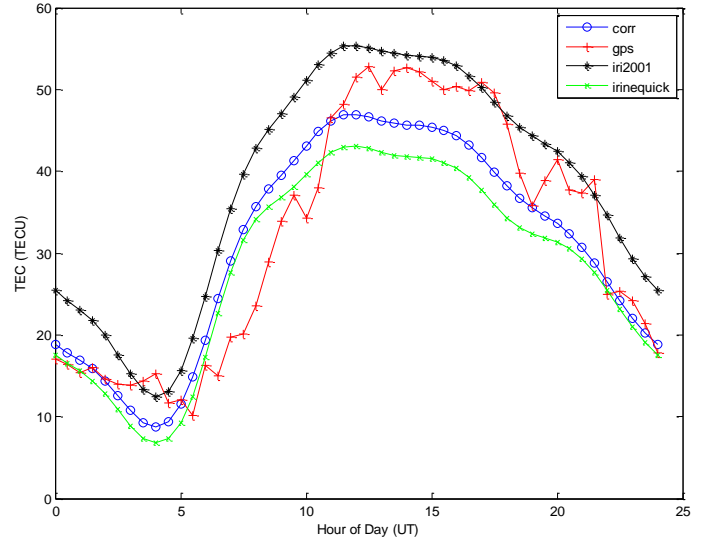


(b)

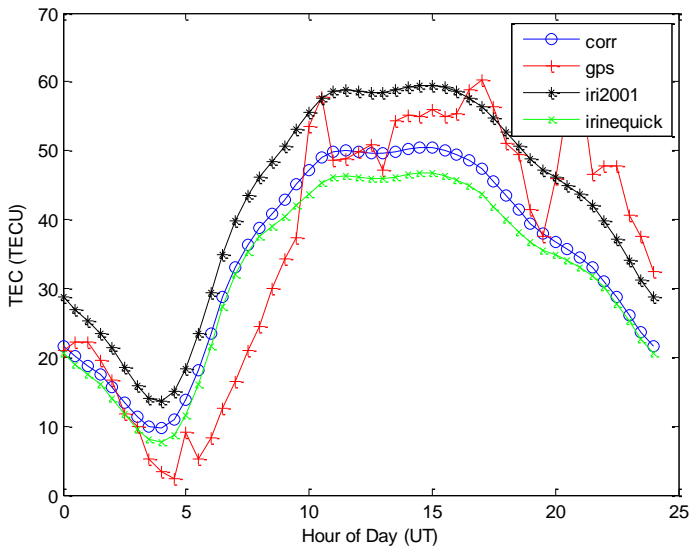


(c)

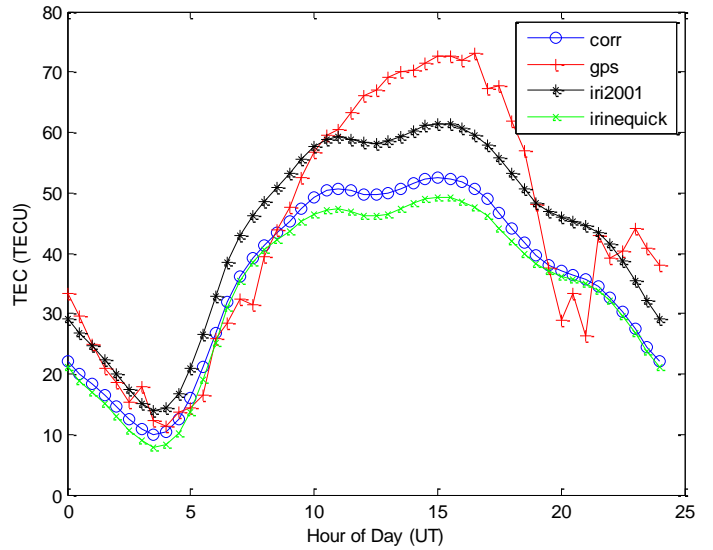


(d)

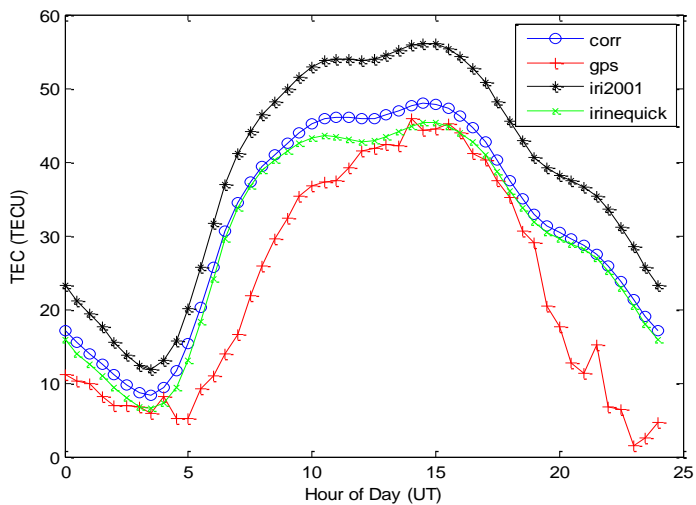

(e)

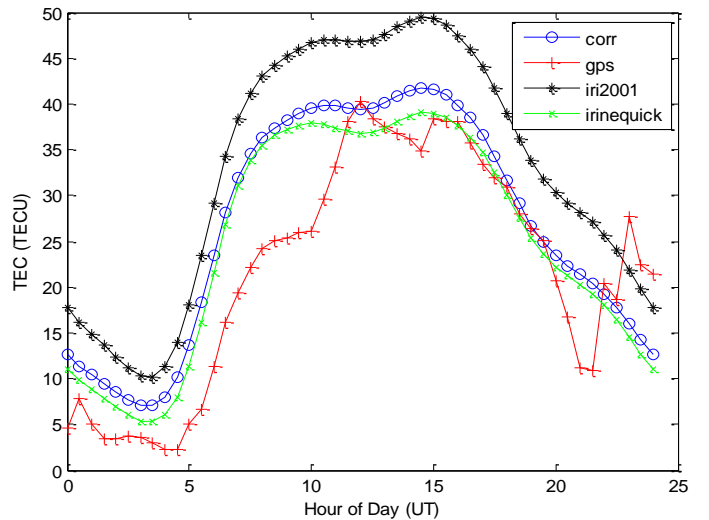


(f)

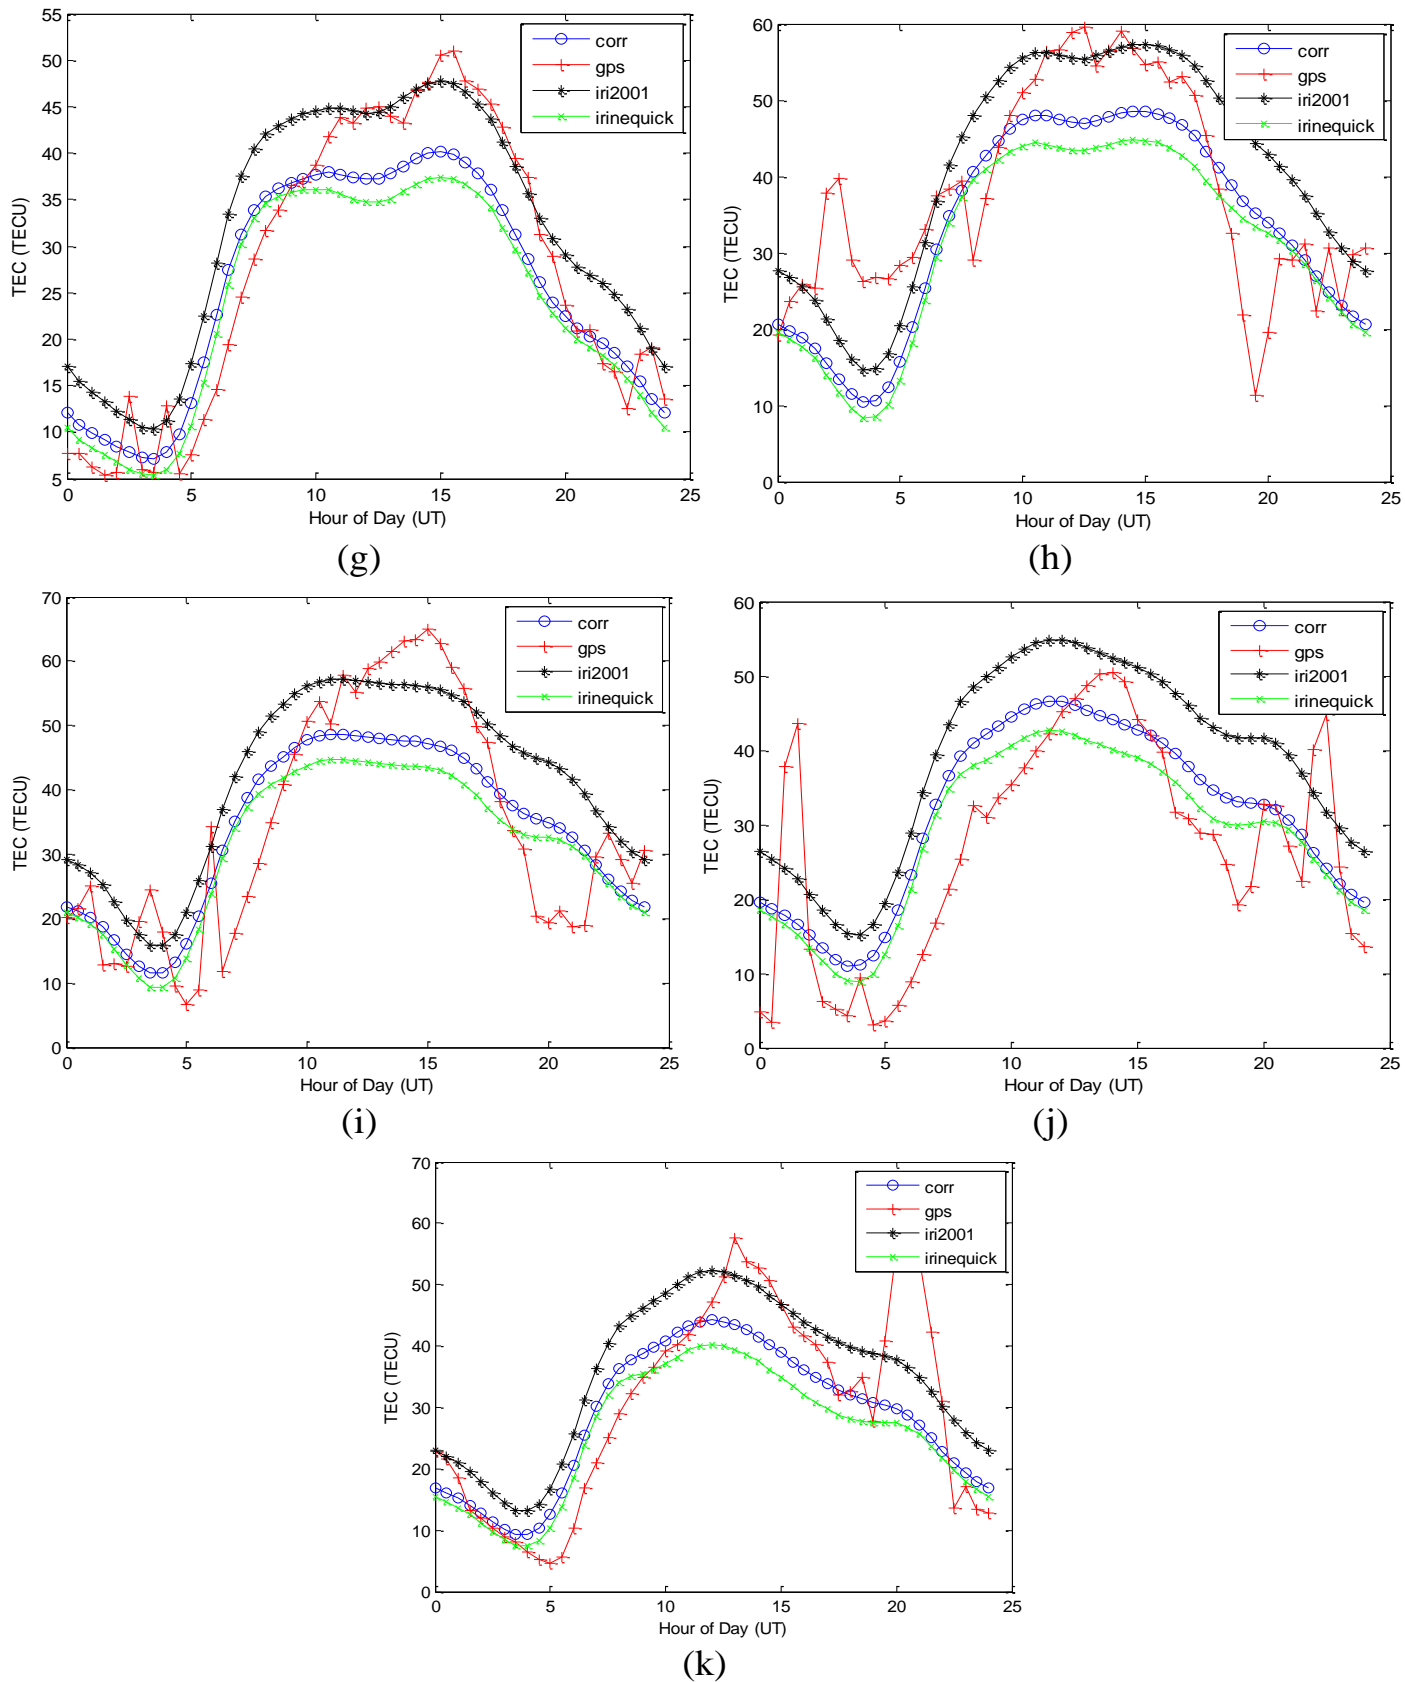

**Figure 1.** Half-hourly variations for the selected days: (a) 31<sup>st</sup> January (b) 28<sup>th</sup> February (c) 30<sup>th</sup> March (d) 30<sup>th</sup> April (e) 31<sup>st</sup> May (f) 30<sup>th</sup> June (g) 15<sup>th</sup> July (h) 30<sup>th</sup> September (i) 31<sup>st</sup> October (j) 30<sup>th</sup> November, and (k) 31<sup>st</sup> December, 2013 respectively.

**Table 1.** Correlation coefficient between IRI-TEC and GPS-TEC values for the selected days.

DATE	NEQUICK	IRIR-CORR	IRI2001
31-01-2013	0.9064	0.9093	0.9182
28-02-2013	0.9090	0.9201	0.9262
30-03-2013	0.8492	0.8464	0.8681
30-04-2013	0.9027	0.9167	0.9185
31-05-2013	0.9153	0.9298	0.9209
30-06-2013	0.8876	0.8941	0.9022
15-07-2013	0.9433	0.9507	0.9527
30-09-2013	0.7259	0.7556	0.7314
31-10-2013	0.8164	0.8344	0.8267
30-11-2013	0.7721	0.7701	0.7804
31-12-2013	0.8301	0.8276	0.8449

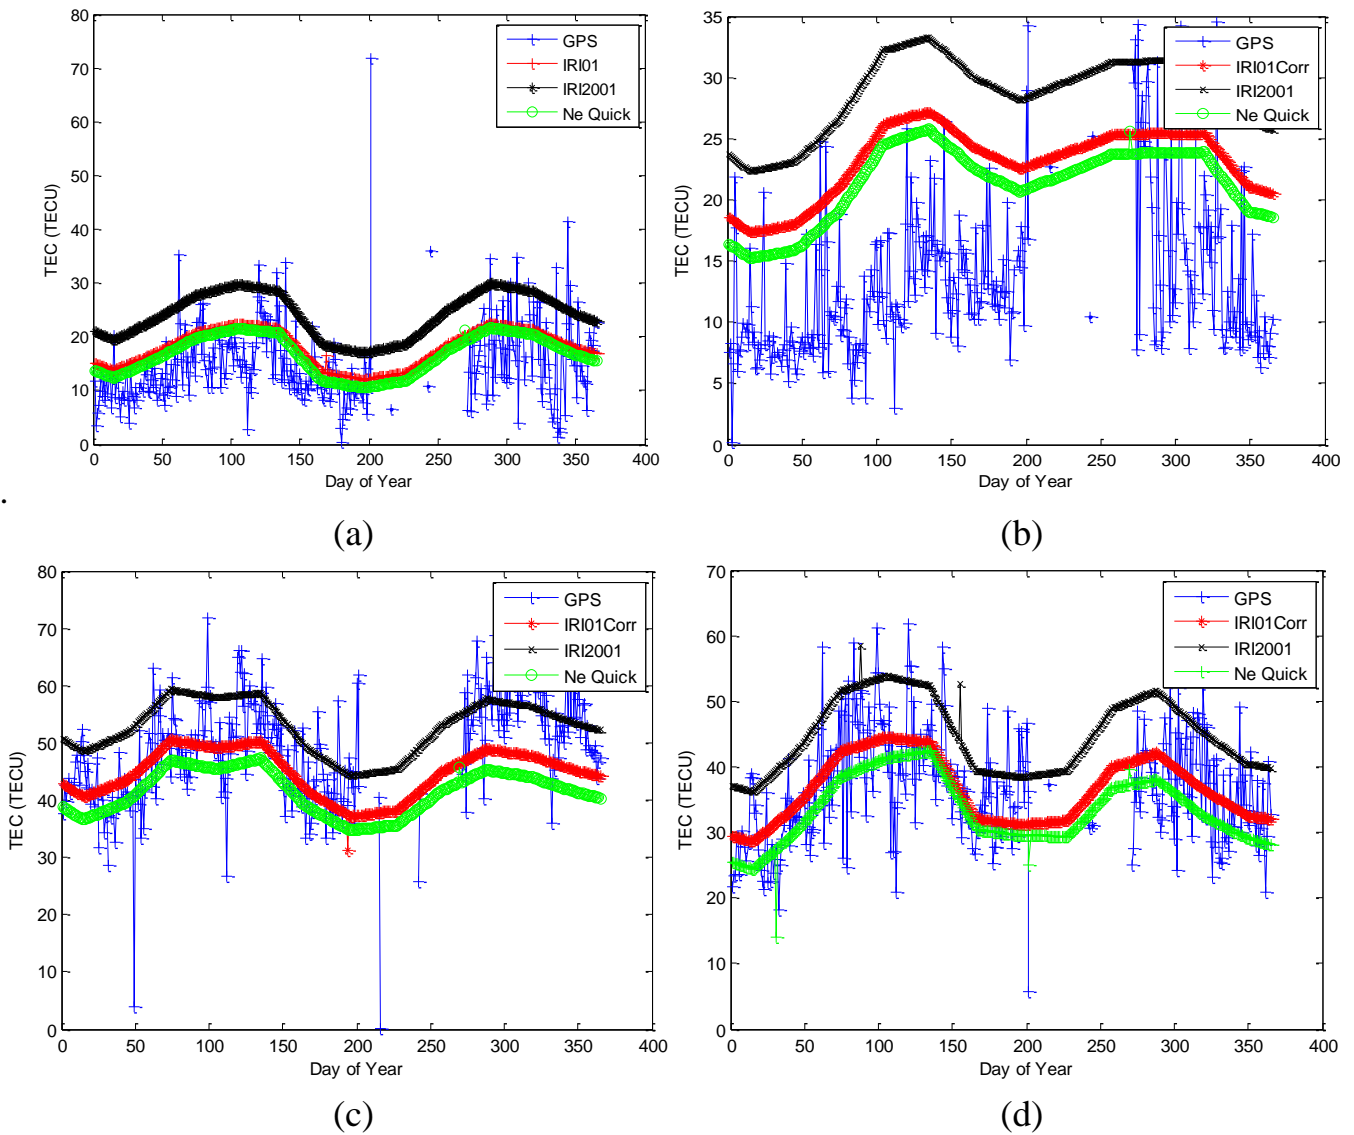

**Figure 2.** Plots of annual GPS TEC and IRI model-predicted TEC values at (a) dawn (0006 UT), (b) mid-day (0011 UT), (c) dusk (1700 UT), and (d) mid-night (2300 UT).

**Table 2.** Root-mean-square deviations (RMSD) and the percent root-mean-square deviations (%RMSD) of the IRI-TEC values from the GPS-TEC values for the selected days.

DATE	NEQUICK		IRIR-CORR		IRI2001	
	RMSD	%RMSD	RMSD	%RMSD	RMSD	%RMSD
31-01-2013	5.2999	19.9851	6.2789	23.6765	11.5565	43.5775
28-02-2013	7.3087	20.6698	5.9431	16.8077	8.3159	23.5185
30-03-2013	11.0681	27.0243	10.2400	25.0024	10.8203	26.4194
30-04-2013	13.9794	29.0312	12.1752	25.2845	8.4172	17.4801
31-05-2013	9.0299	32.6372	10.0105	36.1815	16.3050	58.9320
30-06-2013	6.6095	26.3548	7.5029	29.9172	12.5642	50.0987
15-07-2013	6.7959	21.6342	5.7754	18.3857	6.5918	20.9846
30-09-2013	11.6912	28.9990	10.2469	25.4165	10.5464	26.1594
31-10-2013	11.1859	28.7743	10.1419	26.0888	12.2925	31.6210
30-11-2013	9.5605	30.8683	10.2936	33.2353	14.7048	47.4779
31-12-2013	10.8569	31.2400	9.7409	28.0288	9.9601	28.6596

**Table 3a.** Hourly correlation coefficients between the three topside IRI models and the GPS TEC values for all days of the year.

Hour of Day (h) (UT)	NeQuick	IRI-Corr	IRI2001
0000	0.4752	0.4669	0.3654
0001	0.5745	0.4451	0.5124
0002	0.4871	0.3652	0.4432
0003	0.4118	0.4121	0.5423
0004	0.3184	0.3322	0.3141
0005	0.3451	0.3114	0.3031
0006	0.4472	0.4031	0.4004
0007	0.4443	0.4231	0.4021
0008	0.3619	0.3442	0.3002
0009	0.3536	0.3033	0.3422
0010	0.4316	0.3561	0.3432
0011	0.4761	0.4031	0.3566
0012	0.5449	0.4643	0.4052
0013	0.5514	0.4231	0.4112
0014	0.5205	0.5001	0.4811
0015	0.5028	0.4821	0.4636
0016	0.5433	0.5134	0.4734
0017	0.5768	0.5233	0.4831
0018	0.5380	0.4922	0.4634
0019	0.3516	0.4641	0.4421
0020	0.2793	0.3221	0.2111
0021	0.2875	0.2331	0.2112
0022	0.4939	0.3521	0.3212
0023	0.6038	0.4331	0.3421

GNSS Reference NETwork (NIGNET) project, in the Office of the Surveyor General of Nigeria for providing the GPS data used in this work. In addition, many thanks to Dr. Gopi K. Seemala of the Indian Institute of

Geomagnetism (IIG), Navi Mumbai, India for granting access to the GPS TEC analysis software, and to Dieter Bilitza and the IRI group for making the IRI models available.

**Table 3b.** Hourly root-mean-square and percent root-mean-square deviations of the three topside IRI models from the GPS TEC values.

Hour of Day (h) (UT)	RMSD (TECU)			%RMSD		
	NeQuick	IRI-Corr	IRI2001	NeQuick	IRI-Corr	IRI2001
0000	5.0319	4.8657	11.0087	32.1584	32.7684	66.8520
0001	5.3351	4.9928	10.6251	35.2033	41.0155	62.2942
0002	4.4911	5.0341	10.3066	39.3356	30.0192	60.3066
0003	4.9887	5.6233	9.4713	48.6620	37.9702	54.3419
0004	3.8250	4.4552	9.9588	49.3649	85.2613	46.1253
0005	3.9894	7.4513	10.5655	51.6724	250.5456	261.5541
0006	10.3365	12.0562	16.3274	67.03020	145.3765	166.5432
0007	12.0146	13.1743	9.4133	52.5505	14.7605	34.8791
0008	9.9077	11.6663	10.9099	32.2139	66.2947	81.2625
0009	8.0719	9.3127	14.7795	21.2570	35.3078	38.9446
0010	7.6371	8.1547	13.1394	17.5131	12.9752	30.0404
0011	8.9553	8.2341	11.6982	18.6940	13.7043	24.5801
0012	11.1803	10.4351	10.1019	21.9548	15.8754	19.9325
0013	13.0539	13.5522	11.4356	24.7725	14.4346	22.1344
0014	13.5847	12.8713	14.2133	25.5500	15.0739	34.5412
0015	13.2616	13.2655	12.3244	25.3512	15.2567	34.8972
0016	11.5831	10.8831	9.8723	23.6539	17.2121	24.5666
0017	9.4125	9.2167	11.4471	21.5588	22.7922	32.6678
0018	6.9231	6.0771	10.4372	19.3595	36.0679	30.5521
0019	7.1642	6.3361	9.0244	25.0521	44.1609	23.4324
0020	8.8882	9.2723	13.6733	33.3567	43.8653	36.8961
0021	8.3262	6.0231	11.3833	31.2783	39.6856	22.0133
0022	7.1092	7.9951	15.7726	27.9865	36.2154	38.6783
0023	6.6456	7.2133	12.45621	28.3545	36.2311	25.6581

## REFERENCES

- Adeyemi AO, Oyeyemi EO, Adeniyi JO, Adeloye AB, Oladipo OA (2011). Comparison of total electron content predicted using the IRI-2007 model with GPS observations over Lagos, Nigeria. *Indian J. Radio Space Phys.* 40:21-25.
- Bilitza D (2001). International Reference Ionosphere 2000. *Radio Sci.* 36(2):261-275.
- Bilitza D, Reinisch BW (2008). International Reference Ionosphere 2007: improvements and new parameters. *Adv. Space Res.* 42(4):599-609.
- Bilitza D, McKinnell LA (2011). International Reference Ionosphere (IRI-2011). Proceedings at the 2011 IRI Workshop, SANSA. *Space Sci.* 10 - 14 October, 2010, Hermanus, South Africa.
- Guoqi L, Wengeng H, Jiancun G, Shen H (2013). Seasonal variability of GPS vTEC and model during low solar activity period (2006–2007) near the equatorial ionization anomaly crest location in Chinese zone. *Adv. Space Res.* 51:366-376.
- Hofmann-Wellenhof B, Lichtenegger H, Collins J (2001). *Global Positioning System: Theory and Practice*. New York: Springer-Verlag.
- Jatau B, Fernandes RMS, Adebomehin A, Gonçalves N (2010). NIGNET - The New Permanent GNSS Network of Nigeria. Proceedings at the FIG Congress 2010 - Facing the Challenges-Building the Capacity, Sydney, Australia, 11-16 April, 2010.
- Okoh D, Eze A, Okere B, McKinnell LA, Okeke PN (2011). Does the IRI really know Nsukka? A comparison of IRI-TEC with GPS-TEC over Nsukka, Nigeria. Proceedings at the IRI 2011 Workshop, SANSA *Space Sci.*, 10 -14 October, Hermanus, South Africa, 2011.
- Okoh DE, Eze A, Adedjoja O, Okere B, Okeke PN (2012). A Comparison of IRI TEC predictions with GPS-TEC measurements over Nsukka, Nigeria. *Space Weather* 10(S10002):1-6.
- Okoh DE, McKinnell LA, Cilliers P, Okere B, Okonkwo C, Rabi B (2015). IRI-vTEC versus GPS-vTEC for Nigeria SCINDA GPS stations. *Adv. Space Res.* 55(8):1941-1947.
- Oyeyemi EO (2014). International Reference Ionosphere. Proceedings at the National Space Weather School and National Conference of Nigerian Geophysical Society held in Bells University of Technology, Ota - Nigeria.
- Rabi AB, Groves K, Abdulrahim RB, Fayose RS, Adeniyi JO, Ariyibi EA, Oyeyemi EO, Okere BI (2011). TEC derived from some GPS stations in Nigeria and comparison with the IRI: proceedings at the International Meeting on the Applications of GNSS, United Nations, Vienna, Austria, 12–16 December.
- Rao KD (2017). An Assessment of Mapping Functions for VTEC Estimation using Measurements of Low Latitude Dual Frequency GPS Receiver. *Int. J. Appl. Eng. Res.* 12(4):422-427.
- Seemala GK (2014). Rinex GPS-TEC Program Version 2.9.3. seemala.blogspot.com.ng, Retrieved on February 20, 2016.
- Torben S, Olushola AO (2013). Single-frequency GNSS retrieval of vertical total electron content (VTEC) with GPS L1 and Galileo E5 measurements. *J. Space Weather Space Clim.* 3:A11-A17
- Win ZH, Yoshitaka G, Yoshiya K (2016). Estimation Method of Ionospheric TEC Distribution using Single Frequency Measurements of GPS Signals. (*IJACSA*) *Int. J. Adv. Comput. Sci. Appl.* 7(12):1-6.
- Ya'acob N, Idris A (2012). Measurement Of Total Electron Content (TEC) Using Virtual Reference Station (VRS) Data At Ionosphere Layer. *J. Appl. Sci. Res.* 8(8):4084-4095.
- Zhang B, Teunissen PJ, Yuan Y, Zhang H, Li M (2017). Joint estimation of vertical total electron content (VTEC) and satellite differential code biases (SDCBs) using low-cost receivers. *J. Geod.* pp. 1-13.

*Full Length Research Paper*

# Comparative study of commercial gas with biogas produced from co-digestion of corn cob, rice chaff, goat and dog dungs

Okolie N. P.<sup>1\*</sup>, Onifade A. K.<sup>2</sup>, Oladunmoye M. K.<sup>2</sup> and Adegunloye D. V.<sup>2</sup>

<sup>1</sup>Department of Food Technology, Yaba College of Technology, P. M. B. 2011, Yaba, Lagos, Nigeria.

<sup>2</sup>Department of Microbiology, Federal University of Technology, Akure, Nigeria.

Received 23 June, 2017; Accepted 27 February, 2018

Investigations were conducted to compare gas produced from co-digestion of corncob, rice chaff, goat dung and dog dung with commercial gas. The study was carried out anaerobically at a temperature of 29.5 to 33°C (mesophilic condition) in a mini laboratory digester (bioreactor) fabricated using guage 16 metal sheets with 80-L capacity for a 90-day retention time. The shredded corn cob and rice chaff were mixed with water at ratio 4:1 (waste to water) and 3:1 (waste to water) respectively and mixed with goat and dog dungs at ratio 2:1 (waste to water). The control sample collected from a domestic cooking gas cylinder contained 56.12% CH<sub>2</sub>, 0.14% NH<sub>3</sub>, 0.22% CO, 0.23% H<sub>2</sub>S and 43.20% CO<sub>2</sub>. The result obtained for the biogas analysis shows that Sample E (75:25) contains 63.54% CH<sub>4</sub>, 0.93% NH<sub>3</sub>, 0.84% CO, 0.54% H<sub>2</sub>S, 34.12% CO<sub>2</sub>. The value recorded for sample E represented the highest value obtained among the samples. Also the gas composition shows a good substitute for commercial gas.

**Key words:** Corn cob, rice chaff, goat dung, dog dung, biogas, commercial gas, bioreactor and digestates.

## INTRODUCTION

Utilization of non-renewable energy in excess can cause problems of energy crisis. The use of energy sources such as fuel derived from fossil raw materials is a fuel that is not easily recyclable and requires a long process to produce the fuel. Therefore, there are the needs for new alternative energy sources that are renewable. One of the energy technologies that comply with these requirements is biogas technology (Wahyuni, 2011).

Production of biogas from waste and organic residue with various types of anaerobic digesters method has

been widely studied, both experimental and theoretical, for decades. Biogas can be obtained from wide range of organic wastes e.g. animal waste, industrial waste water and municipal solid wastes (Tuesorn et al., 2013).

Biogas production has been carried out by several researchers and can be produced by anaerobic digestion with anaerobic organisms, which digest material inside a closed system, or fermentation of biodegradable materials. Biogas is primarily methane (CH<sub>4</sub>) and carbon dioxide (CO<sub>2</sub>) and may have small amounts of hydrogen

\*Corresponding author. E-mail: [nwabueze.okolie@yabatech.edu.ng](mailto:nwabueze.okolie@yabatech.edu.ng)

sulfide, moisture and siloxanes. The gases methane, hydrogen, and carbon monoxide (CO) can be combusted or oxidized with oxygen. This energy release allows biogas to be used as a fuel; it can be used for any heating purpose, such as cooking, as well as in a gas engine to convert the energy in the gas into electricity and heat. Biogas can be compressed, the same way natural gas is compressed to CNG, and used to power motor vehicles. Biogas can be cleaned and upgraded to natural gas standards, when it becomes bio methane (Huertas et al., 2011).

In view of search for the solutions of anaerobic digestion of animal and plant wastes as well as exploring the potentials of all decomposable wastes, the ability to generate biogas with the blend of goat, dog and plant waste (that is, corn cob) is investigated. Though the waste from goat and dog may be small as compared to cow and other livestock, they could be useful in enhancing the viability of other major wastes (particularly the plant waste – corn cob). This study aims at investigating the viability of the blend of goat, dog dung and corn cob as waste to produce combustible biogas when used as major feedstock or enhance the quality of others as a blend.

## MATERIALS AND METHODS

The study was conducted using 80-L metallic digester. The digester was designed and constructed with gauge 16 metal sheets as described by Eze and Ojike (2012). Corn cobs were procured from local roasted corn sellers in Ondo and Lagos States while rice chaff was obtained from a local rice milling industry in Ekiti State. The corn cobs were milled using the dry attrition mill (made by Addis Nigeria, Asiko A11 double grinding mill) so as to reduce the sizes and increase the surface area of the materials for faster degradation. The rice chaff was boiled for 15 min to reduce the lignin content which tend to prevent enzymatic breakdown of the chaff. Goat dung was collected freshly from a local abattoir (Odo-Eran) in Cele area of Lagos, while the dog dung was collected at a veterinary outlet in Surulere Lagos. Corn cob (0.2 kg) and rice chaff (0.1 kg), with goat dung (20 kg) and dog dung (10 kg) was mixed with 60 L of water before digestion. Six bioreactors were used for five different sample ratios of goat and dog dungs blended with the feedstock with the negative control as follow; Sample A: corn cob, rice chaff, goat dungs (25%), dog dung (25%); Sample B: corn cob, rice chaff, goat dungs (50%), dog dung (50%); Sample C: corn cob, rice chaff, goat dungs (75%), dog dung (75%); Sample D: corn cob, rice chaff, goat dungs (25%), dog dung (75%); Sample E: corn cob, rice chaff, goat dungs (75%), dog dung (25%) and Sample F: corn cob, rice chaff, negative control while cooking gas served as positive control.

The chromatography system is composed of the gas chromatography equipment and a recorder for plotting chromatographs. The equipment model is Hp6890 with HP ChemStation and Rev. A09.01 (1206) software. The carrier gas was helium at 20 ml/min flow rate with the inlet temperature of 145°C while the inflow of the carrier gas was 26 ml/min in the column with dimensions and type of 30 m 8 mm 0.85 mm 30 m 1 mm and Heysep DB 100/120; Deerfield, Illinois respectively. The oven temperature was programmed at 140°C in 6 min, ramped at 50°C/min and maintained at 175°C.

## RESULTS AND DISCUSSION

Table 1 revealed the gas production level during the five weeks of biodegradation of the test materials within the six bioreactors subjected to various treatments. The weekly biogas yield for all sample ratios for five weeks from the six bioreactors indicated that gas production started in the first week with E treatment with gas yield of 10 per volume. Same trends was observed by Vivekanandan and Kamaraj (2011) in a study using cow dung as co-substrate with rice chaff at different substrate ratio and the first yield was noticed on the 3<sup>rd</sup> day of digestion. The E treatment also has the highest gas yield of 65 per volume on the fifth week which can be related to the findings of Vivekanandan and Kamaraj (2011) on rice chaff and cow dung as co-substrate at two different ratios and the report showed that the digester case with the highest dung ratio produces the highest yield. Also, Okoroigwe (2005) generated biogas by combining cow and dog dung and linked the high yield to the increased nutrient provided by the combined manure which makes for catabolism and metabolism of the methanogenic bacteria. Previous findings by Eze et al. (2007) and Iyagba et al. (2009) re-affirm that blending animal wastes and crop residues improves the blend digestibility and gas production arising from additional nutrients and gas improved carbon to nitrogen ration.

Figures 1 and 2 shows, both the picture and the scaled drawing of the bioreactor used in this work. Figures 3 to 8 shows the variation of peaks of component hydrocarbons and other gases processed with the waste for the various treatments A to F and Table 2 presents the comparative percentage of the biogas with the commercial gas. The raw gas contains several impurities, like water, dust, H<sub>2</sub>S, CO<sub>2</sub>, siloxanes, hydrocarbons, NH<sub>3</sub>, oxygen and several other elements that must be removed in order to reach certain standards of quality. Adegun and Yaru (2013) reportedly removed these impurities from the biogas by first passing it through a solution of sodium hydroxide for the absorption of carbon dioxide and hydrogen sulphide components of the biogas and through a filter dryer to (dehydrate) absorb the moisture that may have accompanied it before passing to the spooter and then compressing it into the gas cylinder. The biogas obtained from the samples as presented in Table 1 comprises methane (CH<sub>4</sub>), Ammonia gas (NH<sub>3</sub>), Hydrogen sulphide gas (H<sub>2</sub>S), Carbon dioxide (CO<sub>2</sub>), and Carbon II oxide. The percentage of methane obtained for all samples tested are higher than the other gas produced. These results are similar to those obtained by Adegun and Yaru (2013) who worked on cattle dung biogas as a renewable energy for rural laboratories and Swan et al. (2012) who worked on low pressure separation techniques of biogas into methane and carbon dioxide employing polydimethylsiloxane PDMS membrane. The quantity of methane produced shows how effective the bioreactor was. Also the highest

**Table 1.** Weekly biogas yield from the digesting materials (per vol.).

Treatment	Week				
	1	2	3	4	5
A	-	-	25	32	40
B	-	20	35	40	47
C	-	18	30	35	42
D	-	15	22	30	38
E	10	35	42	55	65
F	-	-	-	-	-

**A:** Corn cob, Rice chaff, Goat dungs (25%), Dog dung (25%), **B:** Corn cob, Rice chaff, Goat dungs (50%), Dog dung (50%), **C:** Corn cob, Rice chaff, Goat dungs (75%), Dog dung (75%), **D:** Corn cob, Rice chaff, Goat dungs (25%), Dog dung (75%), **E:** Corn cob, Rice chaff, Goat dungs (75%), Dog dung (25%), **F:** Corn cob, Rice chaff, Negative Control.



**Figure 1.** Picture of the bioreactor. A- Feeder point, B- Stirrer, C- Nozzle for gas outlet, D- Gas cooker and E- Digester tank.



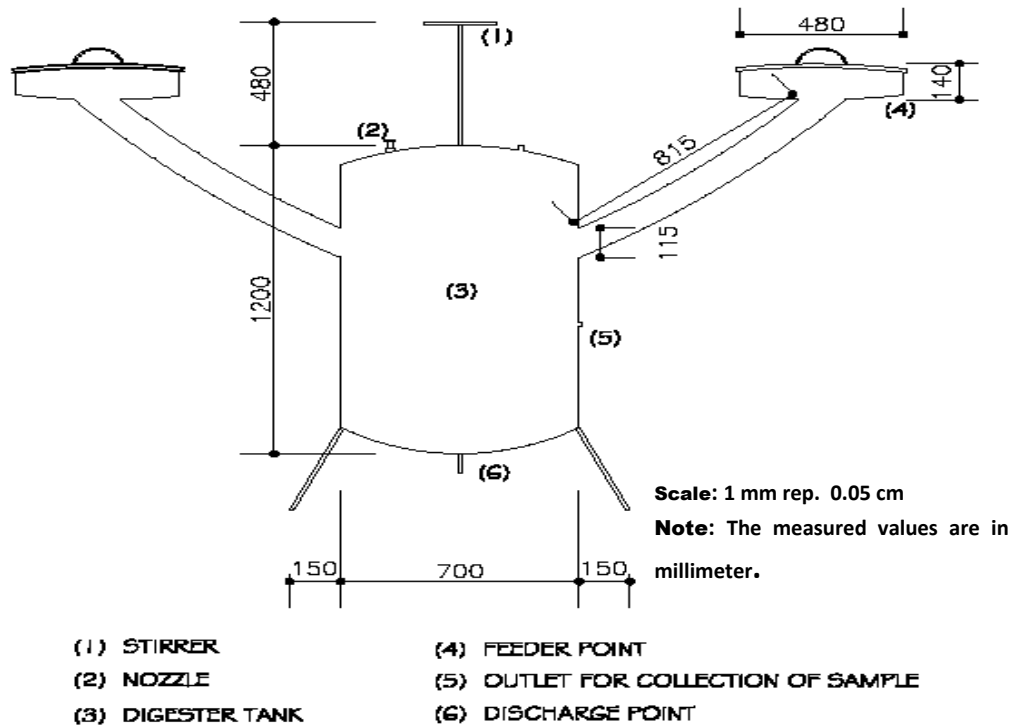


Figure 2. Diagram of the bioreactor.



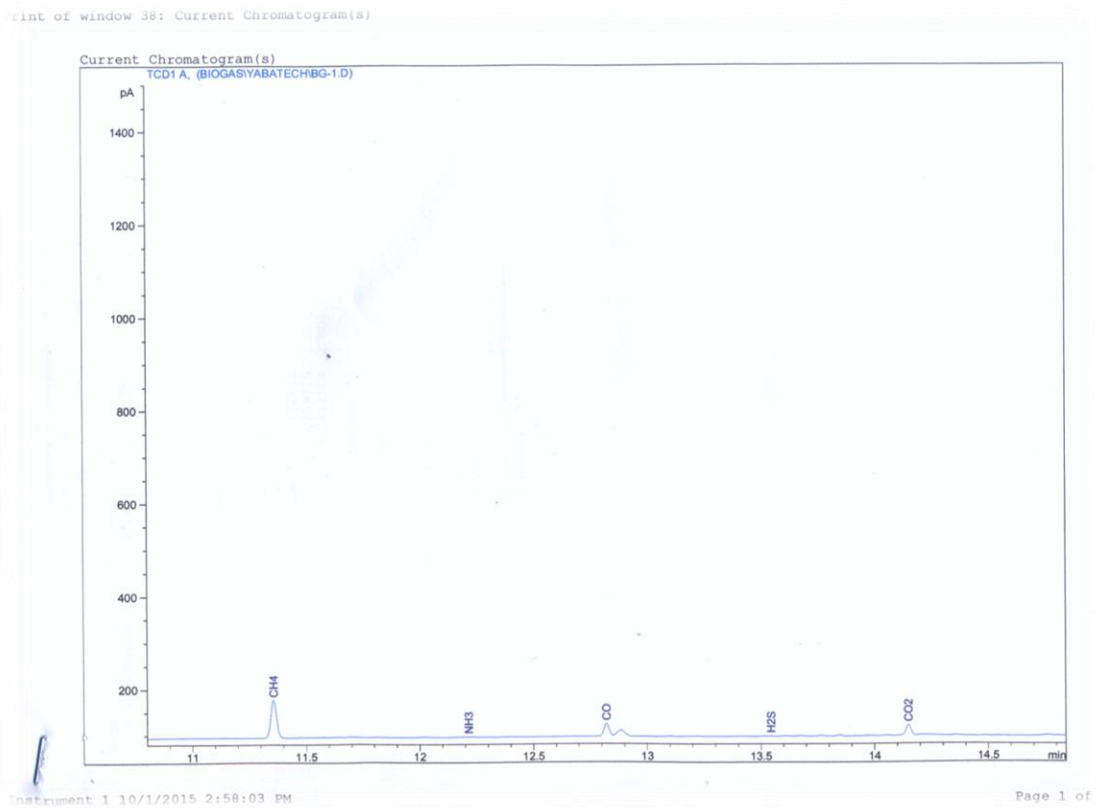


Figure 3. The variation of peaks of component hydrocarbons and other gases processed with the waste (Treatment A: Corncob, rice chaff, goat dung (25%) and dog dung (25%)).

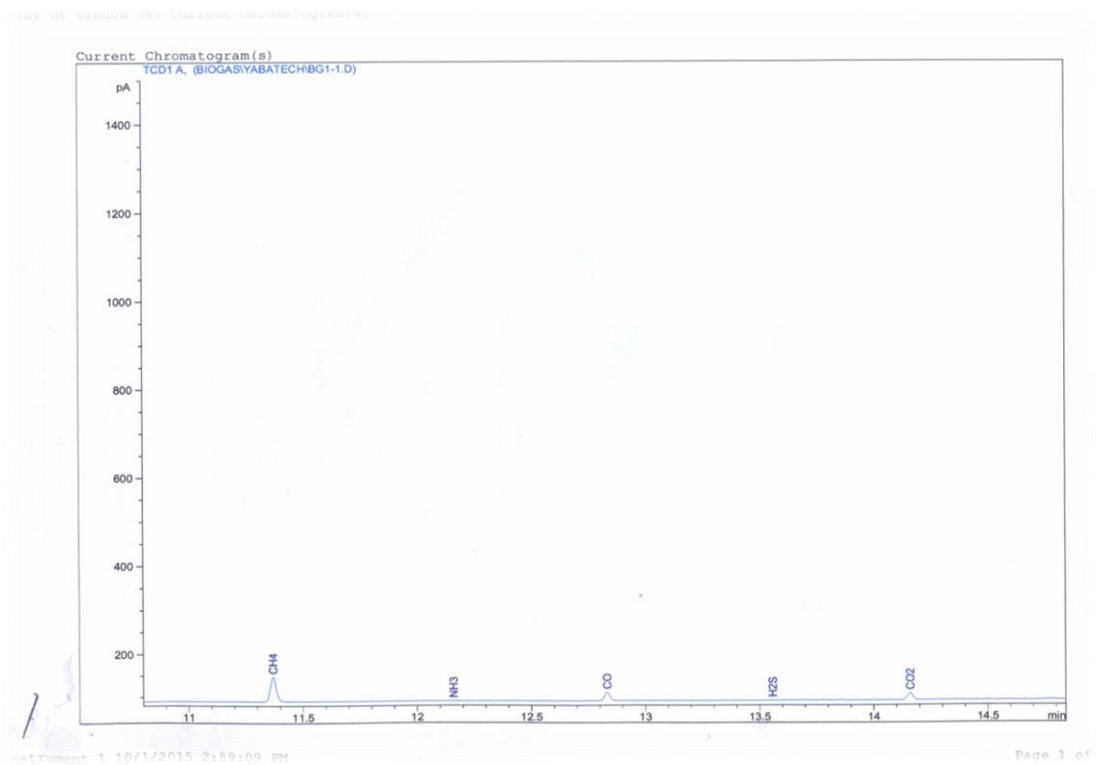


**Figure 4.** The variation of peaks of component hydrocarbons and other gases processed with the waste (Treatment B: Corncob, rice chaff, goat dung (50%) and dog dung (50%).

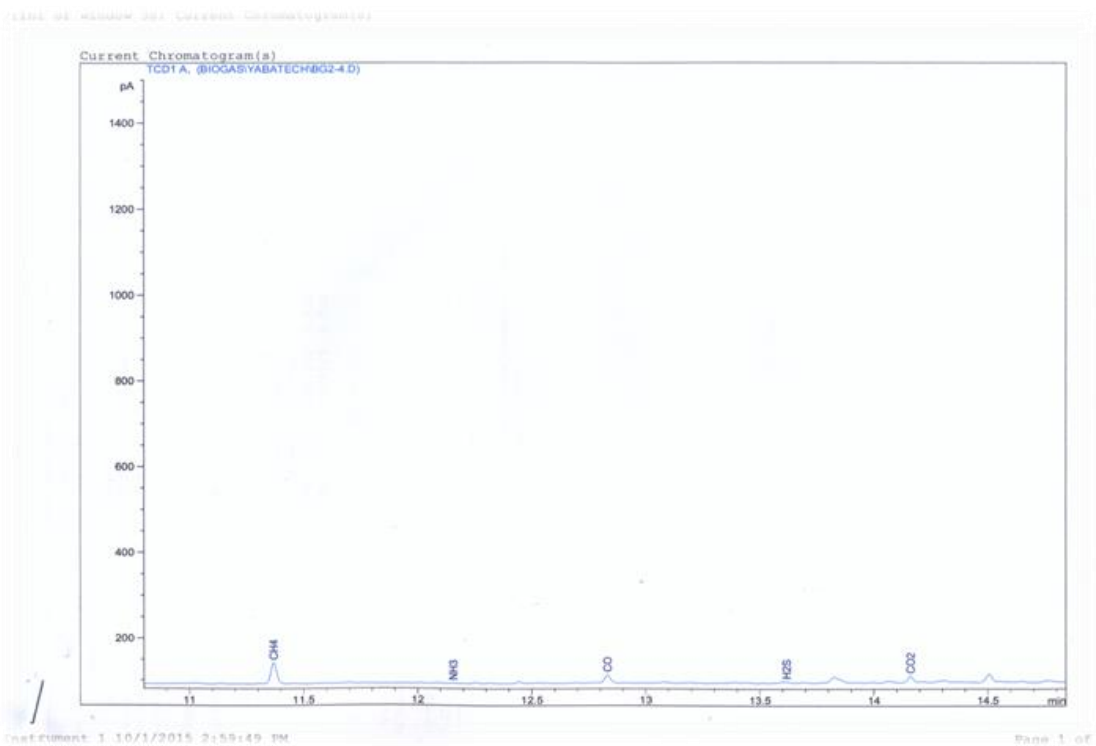


**Figure 5.** The variation of peaks of component hydrocarbons and other gases processed with the waste (Treatment C: Corncob, rice chaff, goat dung (75%) and dog dung (75%).

Print of window 38: Current Chromatogram(s)

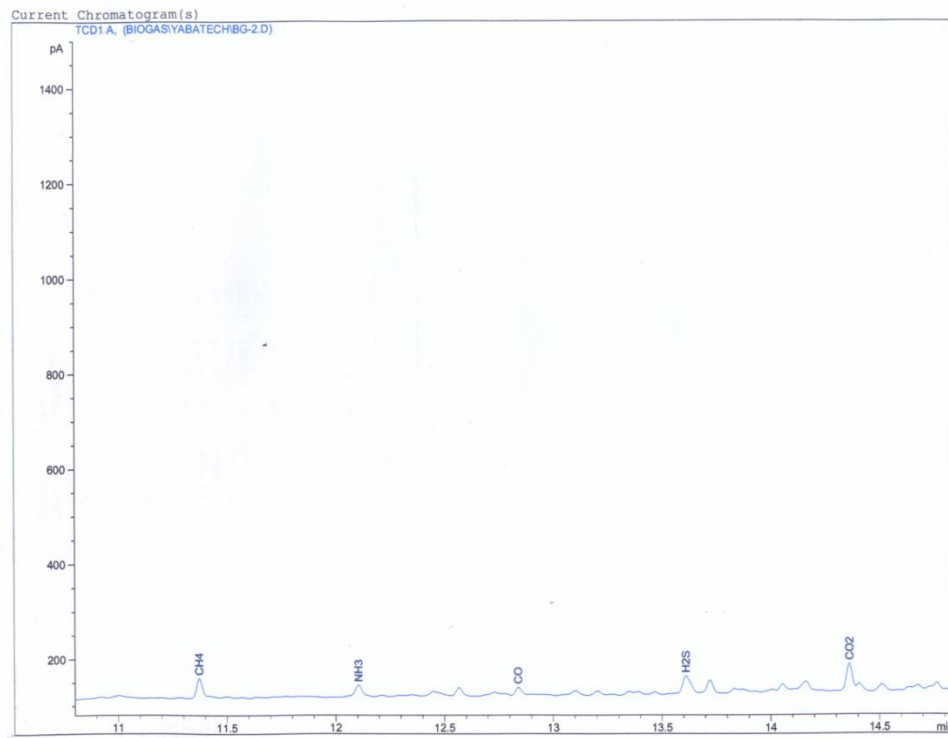


**Figure 6.** The variation of peaks of component hydrocarbons and other gases processed with the waste (Treatment D: Corncob, rice chaff, goat dung (25%) and dog dung (75%)).

Print of window 38: Current Chromatogram(s)

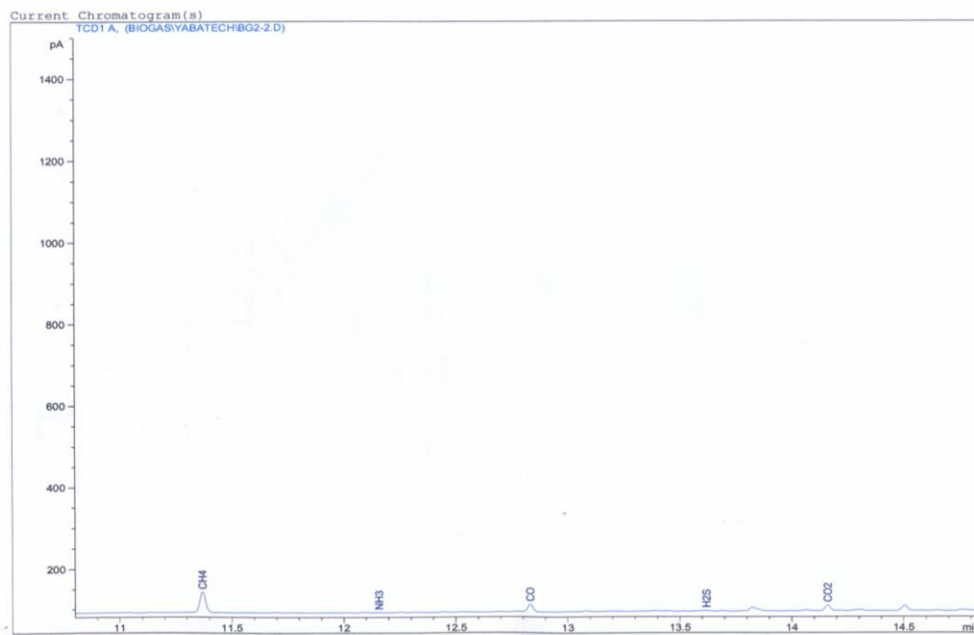

**Figure 7.** The variation of peaks of component hydrocarbons and other gases processed with the waste (Treatment E: Corncob, rice chaff, goat dung (75%) and dog dung (25%)).

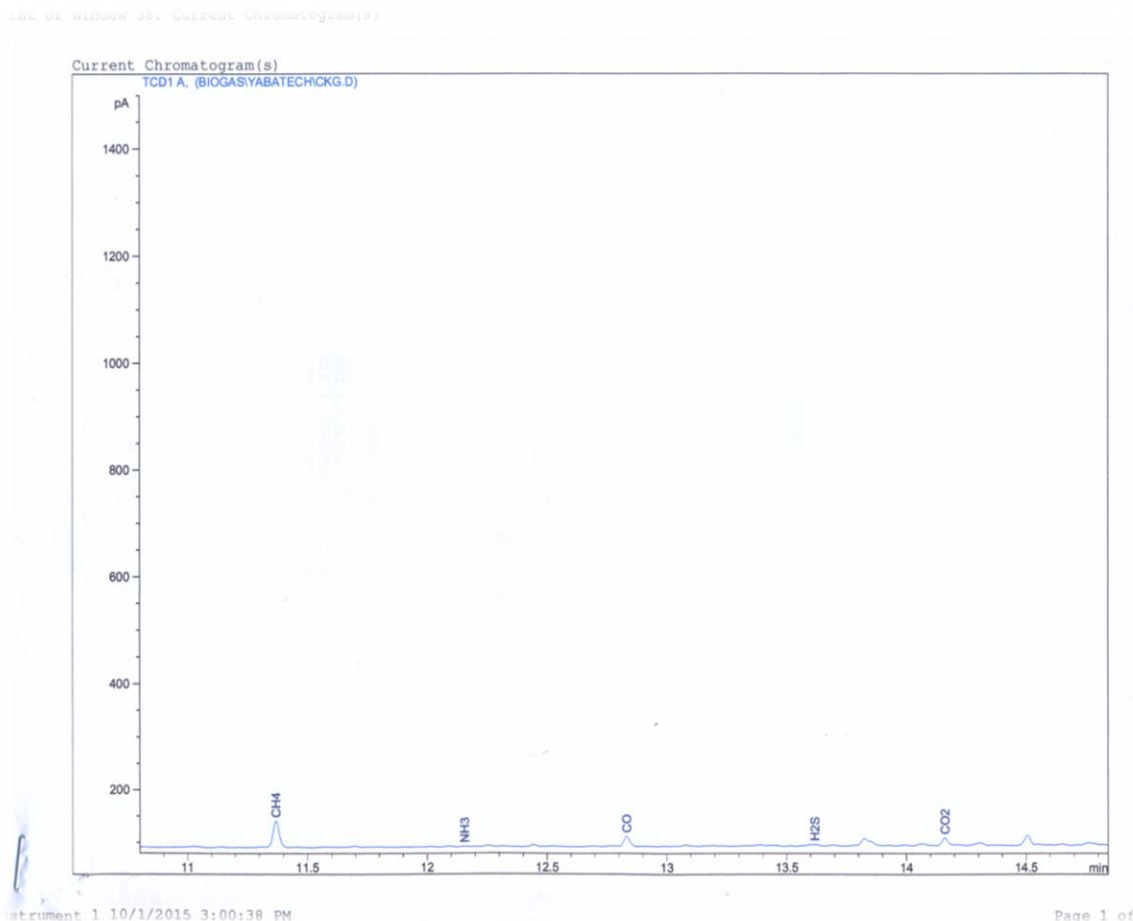

**Figure 8.** The variation of peaks of component hydrocarbons and other gases processed with the waste (Treatment Positive Control).

**Table 2.** Comparative percentage composition of commercial gas with biogas produced from different waste.

Gas samples from different treatments	CH <sub>4</sub>	NH <sub>3</sub>	CO	H <sub>2</sub> S	CO <sub>2</sub>
A	56	0.11	0.16	0.17	42.64
B	60.80	0.86	0.71	0.55	0.52
C	61.35	0.41	0.41	0.68	37.12
D	50.78	0.24	0.79	1.05	47.13
E	63.54	0.93	0.84	0.54	34.13
Commercial gas (-ve control)	56.12	0.14	0.22	0.23	43.20

**A:** Corn cob, Rice chaff, Goat dungs (25%), Dog dung (25%), **B:** Corn cob, Rice chaff, Goat dungs (50%), Dog dung (50%), **C:** Corn cob, Rice chaff, Goat dungs (75%), Dog dung (75%), **D:** Corn cob, Rice chaff, Goat dungs (25%), Dog dung (75%), **E:** Corn cob, Rice chaff, Goat dungs (75%), Dog dung (25%), **F:** Corn cob, Rice chaff, Negative Control.

methane content was recorded by sample E containing the highest goat to dog dung ratio which corresponds to the high volume produced by the sample. The value is also higher than that produced by the control sample which suggests that at the right bioreactor condition the biogas yield can be high enough to be compressed and

used for domestic cooking. The result obtained also sees samples B and C producing higher methane content than that obtained in the control sample. Ammonia (NH<sub>3</sub>) is often removed from gas by a washing process with diluted nitric or sulfuric acid especially in industrial large scale cleaning processes. The use of these acids

demands installations made of stainless steel that can be expensive for small scale applications like biogas cleaning. Ammonia (NH<sub>3</sub>) can also be removed with units filled with activated carbon and is also eliminated in some of the CO<sub>2</sub>-removing units, like adsorption processes and absorption processes with water (Hagen et al., 2001). Hydrogen sulfide gas is a colorless, very poisonous, flammable gas with the characteristic foul odor of rotten eggs, and results mostly from the bacterial breakdown of organic matter in the absence of oxygen, such as in swamps and sewers. This process is commonly known as anaerobic digestion and is the main process in biogas formation (Anon, 2012). Due to its corrosive nature, H<sub>2</sub>S have to be removed in an early state of the biogas upgrading process. The removal of carbon dioxide (CO<sub>2</sub>) is based on the principle of separation of CO<sub>2</sub> and CH<sub>4</sub> by using an absorbent as solvent. The mostly used method is the use of water as physical absorbent typically at a pressure of 1000-2000 kPa (Tynell, 2005). Water solvent is also effective on H<sub>2</sub>S absorption (Wellinger and Lindberg, 2005; Krich et al., 2005; Tynell, 2005). After scrubbing, the water can be regenerated by using a stripping low pressure column, where it is brought into contact with air or steam and inert gas in case of high concentration of H<sub>2</sub>S. This induces the CO<sub>2</sub> to move into the gas phase according to the chemical equilibrium. The separation efficiency of this technique is 95%. This technology is simple and relatively inexpensive; moreover, the loss of CH<sub>4</sub> is relatively small (less than 2%) because of the large difference in solubility of CO<sub>2</sub> and CH<sub>4</sub> (Schomaker et al., 2000; Krich et al., 2005).

## Conclusion

The yield (biogas) produced in this study shows that the feed stock used in the work has high biogas generating potential which shows that anaerobic digestion technique is a variable option for generating energy at low cost while also combating environmental and health hazards that could result from indiscriminate disposal of the waste which serves as the material for the generation of utilizable and renewable energy.

## CONFLICT OF INTERESTS

The authors whose names are listed in this journal certify that they have NO affiliations with or involvement in any organization or entity with any financial interest (such as honoraria; educational grants; participation in speakers' bureaus; membership, employment, consultancies, stock ownership, or other equity interest; and expert testimony or patent-licensing arrangements), or non-financial interest (such as personal or professional relationships, affiliations, knowledge or beliefs) in the subject matter or materials discussed in this manuscript.

## REFERENCES

- Adegun IK, Yaru SS (2013). Cattle dung biogas as a renewable energy source for rural laboratories, Centre for Research and Development (CERAD) The Federal University of Technology, Akure, Nigeria.
- Anon ND (2012). Bio KW. Biogas system for co-digestion of cattle manure, renewable resources, food residues, grease separator sludge and slaughter house waste, Bio Kraftwerk GmbH & Co. KEG.
- Eze IS, Anyanwu CN, Oparaku OU, Okoye COB (2007). Animal Manure: A Resource or a Waste? 37th Annual Conference of Nigerian Society of Chemical Engineers. <http://www.nschef.org> (accessed July, 2011).
- Eze JI, Ojike O (2012). Anaerobic production of biogas from maize wastes. *Int. J. Phys. Sci.* 7(6):982-987.
- Hagen M, Polman E, Jencen J, Myken A, Jonsson O, Dahl A (2001). Adding gas from biomass to the gas grid, Malmö, Sweden: Swedish Gas Center: Report SCG P 118.
- Huertas JI, Giraldo N, Izquierdo I (2011). Removal of H<sub>2</sub>S and CO<sub>2</sub> from Biogas by Amine Absorption in Mass Transfer in Chemical Engineering (ed. J. Markos), ISBN 978-953-307-619-5, Intech. <http://cdn.intechopen.com/pdfs-wm/22869.pdf>
- Iyagba ET, Mangibo IA, Mohammed YS (2009). The study of cow dung as a co-substrates with rice husk on biogas production. *Sci. J. Res. essays* 4(9):861-866.
- Krich K, Augenstein A, Barmale J, Benemann J, Rutledge B, Salour D (2005). Upgrading Dairy Biogas to Biomethane and Other Fuels. In: Andrews K., Editor. Biomethane from Dairy Waste - A Sourcebook for the Production and Use of Renewable Natural Gas in California. s.l.:California: Clear Concepts, pp. 47-69.
- Okoroigwe EC (2005). Adaptation of plastic technology in the production of biogas digester. An M. Eng. Project Report. Department of Mechanical Engineering, University of Nigeria, Nsukka <http://www.unn.edu.ng>.
- Schomaker AHM, Boerboom AAM, Visser A, Pfeifer AE (2000). Anaerobic digestion of agro-industrial wastes: information networks e technical summary on gas treatment, Nijmegen, Nederland: AD-NETT; Report No. FAIR-CT.
- Swan KA, Sapkala RS, Sapkal VS (2012). Low Pressure Separation Technique Of Biogas Into CH<sub>4</sub> And CO<sub>2</sub> Employing PDMS Membrane. *Int. J. Adv. Eng. Technol.* III(1):311-315.
- Tuesorn S, Wong WS, Champreda V (2013). Enhancement of biogas production from swine manure by a lignocellulolytic microbial consortium. *Bioresour. Technol.* 144:579-586.
- Tynell A (2005). Microbial growth on pall-rings e A problem when upgrading biogas with the technique absorption with water wash, Stockholm, Sweden: Svenska Biogasforeningen and Swedish Gas Center: 53 p. Report No.: 610408 ISSN1651-5501.
- Vivekanandan S, Kamaraj G (2011). The study of biogas production from rice chaff (karukka) as Co-substrate with cow dung. *Indian J. Sci. Technol.* 4(6).
- Wahyuni S (2011). Kongres Ilmu Pengetahuan Nasional (KIPNAS) ke 10.
- Wellinger A, Lindberg A (2005). Biogas Upgrading and Utilisation. IEA Bioenergy Task 24: Energy from Biological Conversion of Organic Waste. Available at: [http://www.biogasmax.eu/media/biogas\\_upgrading\\_and\\_utilisation\\_018031200\\_1011\\_24042007.pdf](http://www.biogasmax.eu/media/biogas_upgrading_and_utilisation_018031200_1011_24042007.pdf)

## Related Journals:

