

OPEN ACCESS

# International Journal of Physical Sciences



30 June 2018  
ISSN 1992-1950  
DOI: 10.5897/IJPS  
[www.academicjournals.org](http://www.academicjournals.org)



**ACADEMIC  
JOURNALS**  
expand your knowledge

# ABOUT IJPS

**The International Journal of Physical Sciences (IJPS)** is published twice monthly (one volume per year) by Academic Journals.

**International Journal of Physical Sciences (IJPS)** is an open access journal that publishes high-quality solicited and unsolicited articles, in English, in all Physics and chemistry including artificial intelligence, neural processing, nuclear and particle physics, geophysics, physics in medicine and biology, plasma physics, semiconductor science and technology, wireless and optical communications, materials science, energy and fuels, environmental science and technology, combinatorial chemistry, natural products, molecular therapeutics, geochemistry, cement and concrete research, metallurgy, crystallography and computer-aided materials design. All articles published in IJPS are peer-reviewed.

## Contact Us

**Editorial Office:** [ijps@academicjournals.org](mailto:ijps@academicjournals.org)

**Help Desk:** [helpdesk@academicjournals.org](mailto:helpdesk@academicjournals.org)

**Website:** <http://www.academicjournals.org/journal/IJPS>

**Submit manuscript online** <http://ms.academicjournals.me/>

## Editors

### **Prof. Sanjay Misra**

*Department of Computer Engineering, School of Information and Communication Technology  
Federal University of Technology, Minna,  
Nigeria.*

### **Prof. Songjun Li**

*School of Materials Science and Engineering,  
Jiangsu University,  
Zhenjiang,  
China*

### **Dr. G. Suresh Kumar**

*Senior Scientist and Head Biophysical Chemistry  
Division Indian Institute of Chemical Biology  
(IICB)(CSIR, Govt. of India),  
Kolkata 700 032,  
INDIA.*

### **Dr. Remi Adewumi Oluyinka**

*Senior Lecturer,  
School of Computer Science  
Westville Campus  
University of KwaZulu-Natal  
Private Bag X54001  
Durban 4000  
South Africa.*

### **Prof. Hyo Choi**

*Graduate School  
Gangneung-Wonju National University  
Gangneung,  
Gangwondo 210-702, Korea*

### **Prof. Kui Yu Zhang**

*Laboratoire de Microscopies et d'Etude de  
Nanostructures (LMEN)  
Département de Physique, Université de Reims,  
B.P. 1039. 51687,  
Reims cedex,  
France.*

### **Prof. R. Vittal**

*Research Professor,  
Department of Chemistry and Molecular  
Engineering  
Korea University, Seoul 136-701,  
Korea.*

### **Prof Mohamed Bououdina**

*Director of the Nanotechnology Centre  
University of Bahrain  
PO Box 32038,  
Kingdom of Bahrain*

### **Prof. Geoffrey Mitchell**

*School of Mathematics,  
Meteorology and Physics  
Centre for Advanced Microscopy  
University of Reading Whiteknights,  
Reading RG6 6AF  
United Kingdom.*

### **Prof. Xiao-Li Yang**

*School of Civil Engineering,  
Central South University,  
Hunan 410075,  
China*

### **Dr. Sushil Kumar**

*Geophysics Group,  
Wadia Institute of Himalayan Geology,  
P.B. No. 74 Dehra Dun - 248001(UC)  
India.*

### **Prof. Suleyman KORKUT**

*Duzce University  
Faculty of Forestry  
Department of Forest Industrial Engineering  
Beciyorukler Campus 81620  
Duzce-Turkey*

### **Prof. Nazmul Islam**

*Department of Basic Sciences &  
Humanities/Chemistry,  
Techno Global-Balurghat, Mangalpur, Near District  
Jail P.O: Beltalpark, P.S: Balurghat, Dist.: South  
Dinajpur,  
Pin: 733103,India.*

### **Prof. Dr. Ismail Musirin**

*Centre for Electrical Power Engineering Studies  
(CEPES), Faculty of Electrical Engineering, Universiti  
Teknologi Mara,  
40450 Shah Alam,  
Selangor, Malaysia*

### **Prof. Mohamed A. Amr**

*Nuclear Physic Department, Atomic Energy Authority  
Cairo 13759,  
Egypt.*

### **Dr. Armin Shams**

*Artificial Intelligence Group,  
Computer Science Department,  
The University of Manchester.*

# Editorial Board

**Prof. Salah M. El-Sayed**

*Mathematics. Department of Scientific Computing,  
Faculty of Computers and Informatics,  
Benha University. Benha ,  
Egypt.*

**Dr. Rowdra Ghatak**

*Associate Professor  
Electronics and Communication Engineering Dept.,  
National Institute of Technology Durgapur  
Durgapur West Bengal*

**Prof. Fong-Gong Wu**

*College of Planning and Design, National Cheng Kung  
University  
Taiwan*

**Dr. Abha Mishra.**

*Senior Research Specialist & Affiliated Faculty.  
Thailand*

**Dr. Madad Khan**

*Head  
Department of Mathematics  
COMSATS University of Science and Technology  
Abbottabad, Pakistan*

**Prof. Yuan-Shyi Peter Chiu**

*Department of Industrial Engineering & Management  
Chaoyang University of Technology  
Taichung, Taiwan*

**Dr. M. R. Pahlavani,**

*Head, Department of Nuclear physics,  
Mazandaran University,  
Babolsar-Iran*

**Dr. Subir Das,**

*Department of Applied Mathematics,  
Institute of Technology, Banaras Hindu University,  
Varanasi*

**Dr. Anna Oleksy**

*Department of Chemistry  
University of Gothenburg  
Gothenburg,  
Sweden*

**Prof. Gin-Rong Liu,**

*Center for Space and Remote Sensing Research  
National Central University, Chung-Li,  
Taiwan 32001*

**Prof. Mohammed H. T. Qari**

*Department of Structural geology and remote sensing  
Faculty of Earth Sciences  
King Abdulaziz UniversityJeddah,  
Saudi Arabia*

**Dr. Jyhwen Wang,**

*Department of Engineering Technology and Industrial  
Distribution  
Department of Mechanical Engineering  
Texas A&M University  
College Station,*

**Prof. N. V. Sastry**

*Department of Chemistry  
Sardar Patel University  
Vallabh Vidyanagar  
Gujarat, India*

**Dr. Edilson Fereda**

*Graduate Program on Knowledge Management and IT,  
Catholic University of Brasilia,  
Brazil*

**Dr. F. H. Chang**

*Department of Leisure, Recreation and Tourism  
Management,  
Tzu Hui Institute of Technology, Pingtung 926,  
Taiwan (R.O.C.)*

**Prof. Annapurna P.Patil,**

*Department of Computer Science and Engineering,  
M.S. Ramaiah Institute of Technology, Bangalore-54,  
India.*

**Dr. Ricardo Martinho**

*Department of Informatics Engineering, School of  
Technology and Management, Polytechnic Institute of  
Leiria, Rua General Norton de Matos, Apartado 4133, 2411-  
901 Leiria,  
Portugal.*

**Dr Driss Miloud**

*University of mascara / Algeria  
Laboratory of Sciences and Technology of Water  
Faculty of Sciences and the Technology  
Department of Science and Technology  
Algeria*

**Prof. Bidyut Saha,**

*Chemistry Department, Burdwan University, WB,  
India*

# International Journal of Physical Sciences

Table of Contents: Volume 13 Number 12, 30 June, 2018

## ARTICLE

**Energy and exergy analysis of a solar photovoltaic module performance under the Sahelian Environment**

**196**

Ahmed Sidibba, Diene Ndiaye, Diouma Kobor, Menny El Bah and Sidi Bouhamady

*Full Length Research Paper*

# **Energy and exergy analysis of a solar photovoltaic module performance under the Sahelian Environment**

**Ahmed Sidibba<sup>1\*</sup>, Diene Ndiaye<sup>1</sup>, Diouma Kobor<sup>4</sup>, Menny El Bah<sup>3</sup> and Sidi Bouhamady<sup>2</sup>**

<sup>1</sup>Laboratoire d'Electronique Informatique Télécommunications et Energies Renouvelables, (UGB), Saint-Louis, Sénégal.

<sup>2</sup>Laboratoire d'Energétique Appliquée, Ecole Supérieure Polytechnique de Dakar, Dakar, Sénégal.

<sup>3</sup>Unité Energies Renouvelables, Département Physique, Université de Nouakchott Al-Aasriya, Nouakchott, Mauritanie.

<sup>4</sup>Laboratoire de Chimie et de Physique des Matériaux (LCPM), Université Assane Seck de Ziguinchor, Ziguinchor, Sénégal.

Received 20 May, 2018; Accepted 22 June, 2018

**This work focuses on the performance study of a photovoltaic solar module based on energy and exergy analysis. The experimental data were obtained by precise measurements during a clear sky day March 20, 2018 and a cloudy day March 27, 2018 in the Laboratory of Chemistry and Materials Physics (LCPM) at the Assane Seck University of Ziguinchor, Senegal (12° 34 N, 16° 16 E). Exergy, energy and power conversion efficiency were evaluated for the two days based on measured parameters such as solar intensity, ambient temperature and module temperature. We find that the exergy efficiency varies between 4.5 and 8.93%, the energy efficiency varies between 11.08 and 14.50% and the power conversion efficiency varies between 7.98 and 10.49% throughout the day in the clear sky. While for the cloudy day the exergy efficiency varies between 2.00 and 9.45%, the energy efficiency ranges from 12.41 and 14.5% and the power conversion efficiency varies between 8.93 and 10.46%.**

**Key words:** Exergy, energy, photovoltaic module, performance analysis, efficiency, thermal exergy.

## **INTRODUCTION**

Fossil fuel reserves are declining rapidly due to the increased use of thermal power plants and air pollution associated with the burning of fossil fuels. Therefore, in the current scenario, there is an urgent need to accelerate research and development of renewable energy technology, especially solar energy, to meet global energy demand. Solar energy applications have been progressively increasing worldwide. This is due to the decrease in the cost of photovoltaic panels with the increasing demand, and the increase in the duration of

use (lifetime). Photovoltaic is very competitive in areas far away from the conventional grid (Hill, 1999). However, its exploitation requires a well-optimized design and dimensioning. The performance of photovoltaic modules is highly dependent on weather conditions such as ambient temperature, radiation and wind speed. Exergy analysis is known by researchers and engineers as an essential tool for evaluating the performance of a PV system with the thermodynamic approach. This analysis not only demonstrates the efficiency of energy use, it also

\*Corresponding author. E-mail: [sidiabaahmed@gmail.com](mailto:sidiabaahmed@gmail.com).

provides various useful results corresponding to the exergy efficiency, which become an important principle for the comparison of PV modules. As a result, there has been enormous interest in exergy calculations, considering the irreversibility and the supply of energy in the system. Thus, many scientists have conducted theoretical and experimental studies in this field (Özalp and Bayat, 2017). Rajput et al. (2016) developed a mathematical model to calculate solar cell temperature, hot spot temperature and module efficiency in opaque and semitransparent mono crystalline silicon (sc-Si) PV module. The energy and exergy performance analysis of photovoltaic modules has been the subject of several studies. Abid and Hepbasli (2015) studied the performance of photovoltaic modules through energy efficiency and exergy, the sustainability index, the potential factors for improvement and in terms of exergy costs in the Riyadh area of Saudi Arabia. They determined that energy efficiency ranged from 34.09 to 52.14%, while exergy efficiency ranged from 0.16 to 15.23%. The exergy efficiency for PV / T analysis ranged from 1.36 to 19.86%, with an average value of 9.65%. The durability index ranged from 1.00 to 1.17 for the system. The improvement potential factor had minimum and maximum values of 3,376 and 24,559.42 W respectively, while the exergy rate of solar radiation was of the order of 3,850.9 and 25,115.95 W at the time of the test. Cheikh et al. (2015) studied the effect of irradiation and temperature on module performance in a real environment. They presented the variation of the exergy efficiency according to the temperature of the module on a day. They showed that the exergy efficiency of the module varies from 14.87 to 17.93% per day for a single crystal PV module of 30 Wc. Shukla (2015) presented experimental analysis of amorphous and polycrystalline PV modules tested at Energy Center, Maulana Azad National Institute of Technology in Bhopal, India for a typical January day (27 January 2014). They evaluated the energy, exergy and power conversion efficiencies of the two modules based on solar intensity, ambient temperature, wind speed and module temperature. They showed that the exergy efficiency of the amorphous PV module ranged from 2.44 to 3.92% while it ranged from 4.83 to 8.32% for the polycrystalline PV module throughout the day. Shukla et al. (2015) studied the energy and exergy analysis for a typical hazy day (May 12, 2014) in Bhopal, India. They found that the energy efficiency ranged from 6 to 9% during the day, while the exergy efficiency ranged from 8 to 10%. Aoun et al. (2014) validated experimentally the energy efficiency, power conversion efficiency and exergy efficiency of a mono-crystalline photovoltaic module in the Adrar region of Algeria for three days from 21 March (cloudy day) to 22 - 23 March (two clear days), 2013. They showed from the cloudy day that the energy efficiency varied between 17.2 and 22.3%, the exergy efficiency varies between 5.3 and 12% and power conversion efficiency varies from 12.3 to 16.1%.

However, from the clear days (March 22), the energy efficiency varied between 10.83 and 21.85%, the exergy efficiency varies between 7.98 and 14.54% and power conversion efficiency varies from 8.1 to 16.38%. While, from the clear days (March 23), the energy efficiency varied between 9.28 and 22.1%, the exergy efficiency varies between 1.8 and 15.5% and power conversion efficiency varies from 7.55 to 16.83%.

An obstacle that limits the development of renewable electrical systems is their low efficiency and the lack of performance data in terms of real environment in the places where they are installed. The production and performance of a photovoltaic module is highly dependent on sunlight and the operating temperature of the cell (Yang et al., 2007). This study focuses on the evaluation of a solar photovoltaic module performance based on energy and exergy analysis at two different weather days under climatic conditions in the Ziguinchor region, Senegal. However, one is a cloudy day (March 27, 2018), and the second is a clear days (March 20, 2018).

## MATERIALS AND METHODS

The efficiency of photovoltaic solar modules is measured by the ability of a module to convert sunlight into usable energy for human consumption. The efficiency of the module is a vital element for evaluating the performance of photovoltaic solar modules. The photovoltaic solar module's ability to convert sunlight into usable energy represents the efficiency of the PV module. It is calculated by the ratio between the power generated and total or global solar irradiation. Exergy is the maximum utilizable work that can be removed when the system undergoes a reversible process from an initial state to an end state. The use of exergy analysis techniques will help researchers to better understand, refine and anticipate changes in the behavior of photovoltaic solar modules. Exergy analysis can be used in the design and evaluation of energy systems that reach a state of equilibrium with their environment (Sandnes, 2003).

Energy efficiencies are useful for accounting for energy flows, but do not provide information on the degradation of energy during a process. To do this, efficiencies based on the second law of thermodynamics must be formulated to account for exergy consumption and degradation of energy quality. Exergy analysis has proven to be a powerful tool for identifying energy quality losses in industrial thermodynamic processes. The exergy efficiencies (second law efficiencies) are a measure of the ideal and reversible process proximity compared to a real process (Dincer and Rosen, 2005). Photovoltaic efficiency, evaluated using the exergy efficiency equation, can be represented as the useful exergy ratio (electrical exergy rate and thermal rate) on the exergy of the solar radiation rate (Pandey et al., 2015):

$$\varepsilon = \frac{E_{Xout}}{E_{Xsolar}} \quad (1)$$

Where, the input exergy or the solar radiations exergy ( $E_{Xsolar}$ ) is given by:

$$E_{Xsolar} = \left(1 - \frac{T_a}{T_{sun}}\right) \cdot GA \quad (2)$$

**Table 1.** Specification of measurement instruments used in the experiment.

Name of instruments	Make and model	Ratings	Accuracy	Applications
Solar Power Meter	PYR 1307	0 – 1999 W/m <sup>2</sup>	±10 W /m <sup>2</sup>	Solar radiation intensity
Type of solar module	SP80-36A	V <sub>oc</sub> = 0-21.6V I <sub>sc</sub> = 0-5.11A	Power tolerance +3%	PV module characteristics
Infrared Thermometer	TY 600 (china)	-32-600	±0.1%	PV module temperature
Multimeter	ST-9927T	T, 0-760°C V, 0-1000V I, 0-10A	Volatge, ±0.09% Current, 0.1% Temperature ±0.3%	Output Current, PV Module Voltage, Temperature

Where  $T_{sun}$  is the sun temperature which is taken as 5 777 K, G is the solar radiation intensity and A is the solar photovoltaic module area.

The exergy output of the photovoltaic solar module can be calculated as follows:

$$E_{Xout} = E_{Xelec} + E_{Xtherm} \tag{3}$$

Where  $E_{Xelec}$  is the electrical exergy rate, which is equal to the electric power generated by the module:

$$E_{Xelec} = FF \cdot V_{oc} \cdot I_{sc} \tag{4}$$

The thermal exergy of the system ( $E_{Xtherm}$ ) which is defined as the heat loss of the photovoltaic area at room temperature. Photovoltaic modules heat up because of their exposure to the sun and emit heat in the environment. This heat source is not in equilibrium with the environment and therefore has an exergy, which represents the thermal losses of the photovoltaic module (Akyuz et al., 2012).  $E_{Xtherm}$  can be represented as follows:

$$E_{X,therm} = \left(1 - \frac{T_a}{T_c}\right) \cdot Q \tag{5}$$

Where, the rate of convective heat transfer is given by the following equation:

$$Q = h_{ca}A(T_c - T_a) \tag{6}$$

The parameter ( $h_{ca}$ ) is the coefficient of heat transfer by convection between the environment and the module and whose expression is given by Ajam et al. (2005):

$$h_{ca} = 2.8 + 3v \tag{7}$$

In this work, the wind speed was not measured. We considered the average value for a typical day in Ziguinchor during the month of March ( $v = 2.93$  m / s) to quantify the heat loss of the module. Using the equations above the exergy of a photovoltaic solar module can be written as follows:

$$E_{Xout} = FF \cdot V_{oc} \cdot I_{sc} - \left(1 - \frac{T_a}{T_c}\right) h_{ca}A(T_c - T_a) \tag{8}$$

In general, the exergy efficiency ( $\epsilon$ ) is defined as the ratio of output exergy to that of input exergy and given as follows:

$$\epsilon = \frac{FF \cdot V_{oc} \cdot I_{sc} - \left(1 - \frac{T_a}{T_c}\right) h_{ca}A(T_c - T_a)}{\left(1 - \frac{T_a}{T_{sun}}\right) \cdot GA} \tag{9}$$

The energy efficiency of a photovoltaic solar module can be defined as the ratio between the output energy of the system (the electrical energy) and the input energy (the solar irradiation) received on the photovoltaic area. The energy efficiency of a photovoltaic solar module is given by the following equation (Sahin et al., 2007; Joshi et al., 2009).

$$\eta = \frac{V_{oc} \cdot I_{sc}}{G \cdot A} \tag{10}$$

The photovoltaic solar module power conversion efficiency  $\eta_{pc}$  can be defined as the ratio of the actual electrical output and solar irradiation incident on the PV module area, is given as follows:

$$\eta_{pc} = \frac{FF \cdot V_{oc} \cdot I_{sc}}{G \cdot A} \tag{11}$$

### Experimental set-up

The experimental study was conducted in the Laboratory of Chemistry and Materials Physics (LCPM) at Assane Seck University in Ziguinchor, Senegal (12° 34 N, 16° 16 E). The solar photovoltaic module has been tested and the parameters such as the open circuit voltage ( $V_{oc}$ ) and the short-circuit current ( $I_{sc}$ ), the solar intensity ( $W/m^2$ ) and the ambient temperature ( $T_a$ °C), etc., needed for the evaluation of the systems were measured at an interval of one hour between 9:00 and 18:00. Specification of measuring instruments in the experiment are shown in Table 1. The manufacturer's data sheet for the PV module (SP80-36A) is shown in Table 2. The instruments used for the test are shown in Figure 1.


### RESULTS AND DISCUSSION

The idea of this work is to study and analyze the performance of solar photovoltaic modules in the Sahelian environment. This test is done during a clear day (March 20, 2018) and a cloudy day (March 27, 2018). The exergy efficiency of the photovoltaic solar module was calculated on the basis of the second law of



**Table 2.** Specification of the PV Module.

Parameter	Specifications
Peak power $P_m$ (Wc)	80
Power tolerance (%)	5 %
Open circuit voltage $V_{co}$ (V)	21.6
Short circuit current $I_{sc}$ (A)	4.65
Module efficiency (%)	14.5
Number of cells	36
Area (m <sup>2</sup> )	0.647
Fill factor (FF)	0.725

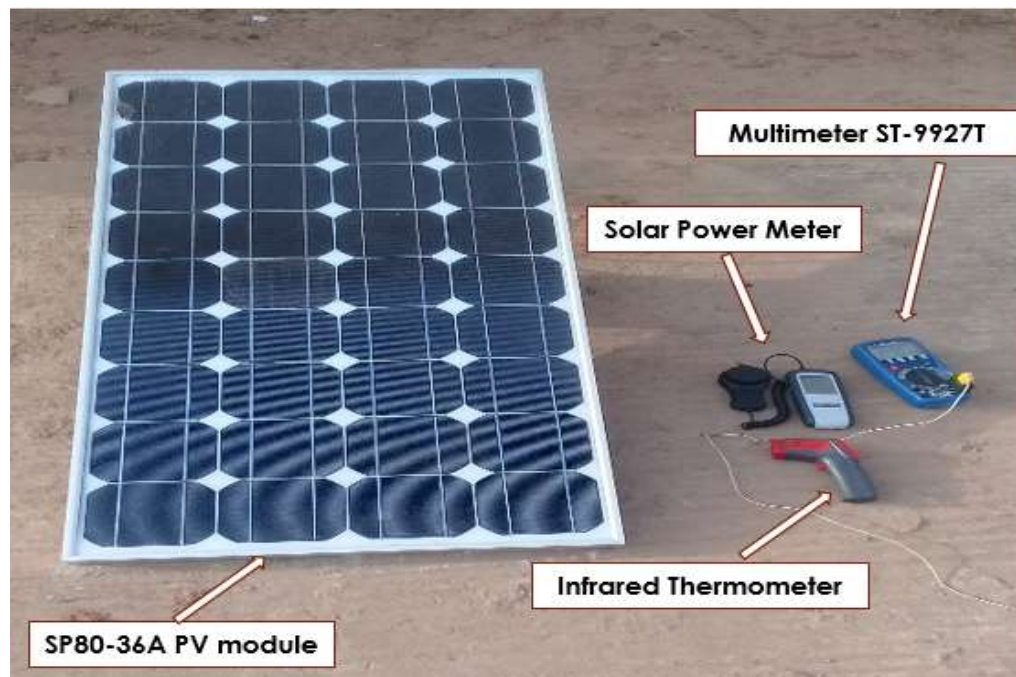**Figure 1.** Instruments used to test PV characteristics.

thermodynamics, taking the solar radiation exergy. An energy and exergy balance of the PV module has been realized. The calculation is made taking into account the climatic conditions of two different days.

The evolution of the solar radiation intensity and the ambient temperature during these two days of test are illustrated on Figure 2. The minimum and maximum temperatures varies between 24.9 and 37.2°C for the clear day and between 25.5 and 35.2°C for the cloudy day respectively. The maximum and minimum solar radiation intensity varies between 129 and 900 W/m<sup>2</sup> for the clear sky day and between 50 and 555 W/m<sup>2</sup> for the cloudy day. We can see a difference of 38.8% between the maximum radiations of these two days, which is due to the cloud cover in the cloudy day. Figure 3 (a and b) shows the variation of solar exergy (input exergy) and the

electrical exergy of the PV module throughout the clear sky day and cloudy day. It is clear that from these two figures, the electrical exergy of the PV module is much lower than what could be extracted, due to a significant loss of exergy resulting from irreversibility.

Figure 4 shows the variation of thermal exergy losses during the conversion process, which is quantified using Equation 9 throughout the clear day and cloudy day. We can see a significant loss gap between the two days considered that is worth 45%. This difference can be explained by variations in climatic conditions during the two days considered. The thermal exergy losses as a function of the difference between the module temperature and the ambient temperature ( $T_c - T_a$ ) are given in Figure 5 for the clear sky day and the cloudy day. From this figure, it can be seen that the maximum

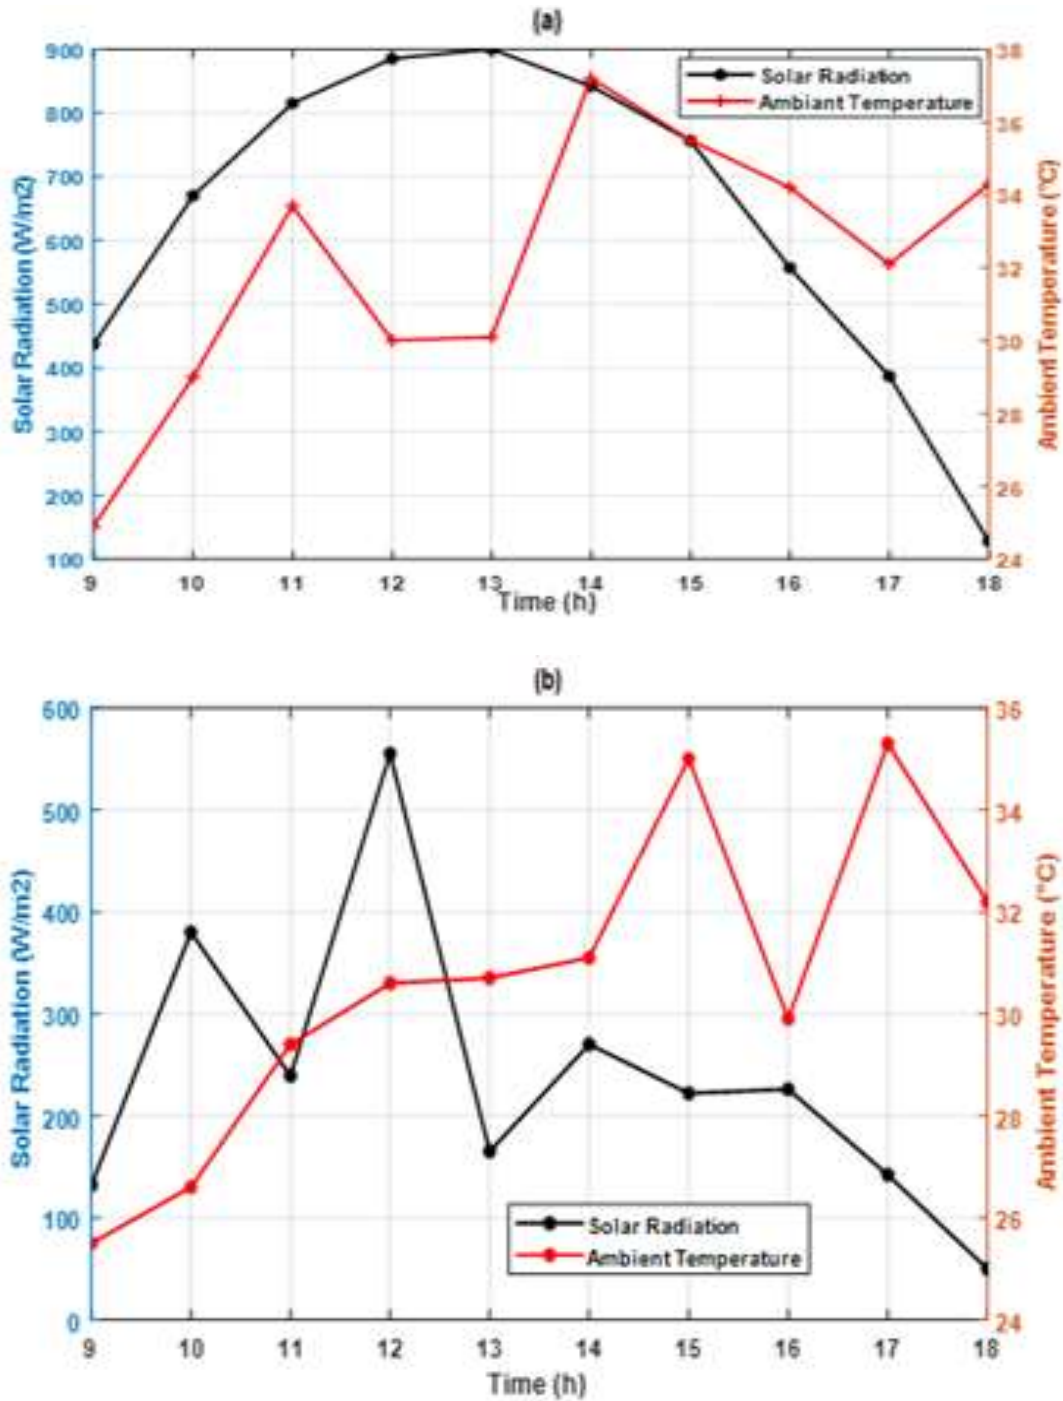


Figure 2. Variation of solar radiation and ambient temperature of a clear day (a) and a cloudy day (b).

values of the thermal exergy losses rate correspond to the maximum values of the temperature difference for the two days considered.

Figure 6 shows the variation of thermal exergy loss and efficiency as a function of time. The results obtained show that the higher the thermal exergy losses, the lower the efficiency values. This may lead us to say that

increasing of the ambient temperature and PV modules temperature is the main cause of the reduction in their efficiency. Indeed, we can see that the two curves have opposite directions of variation and the maximum of the temperature corresponds to the minimum of the efficiency at 12 o'clock during the day. These extrema also correspond to the maxima of thermal and solar exergy

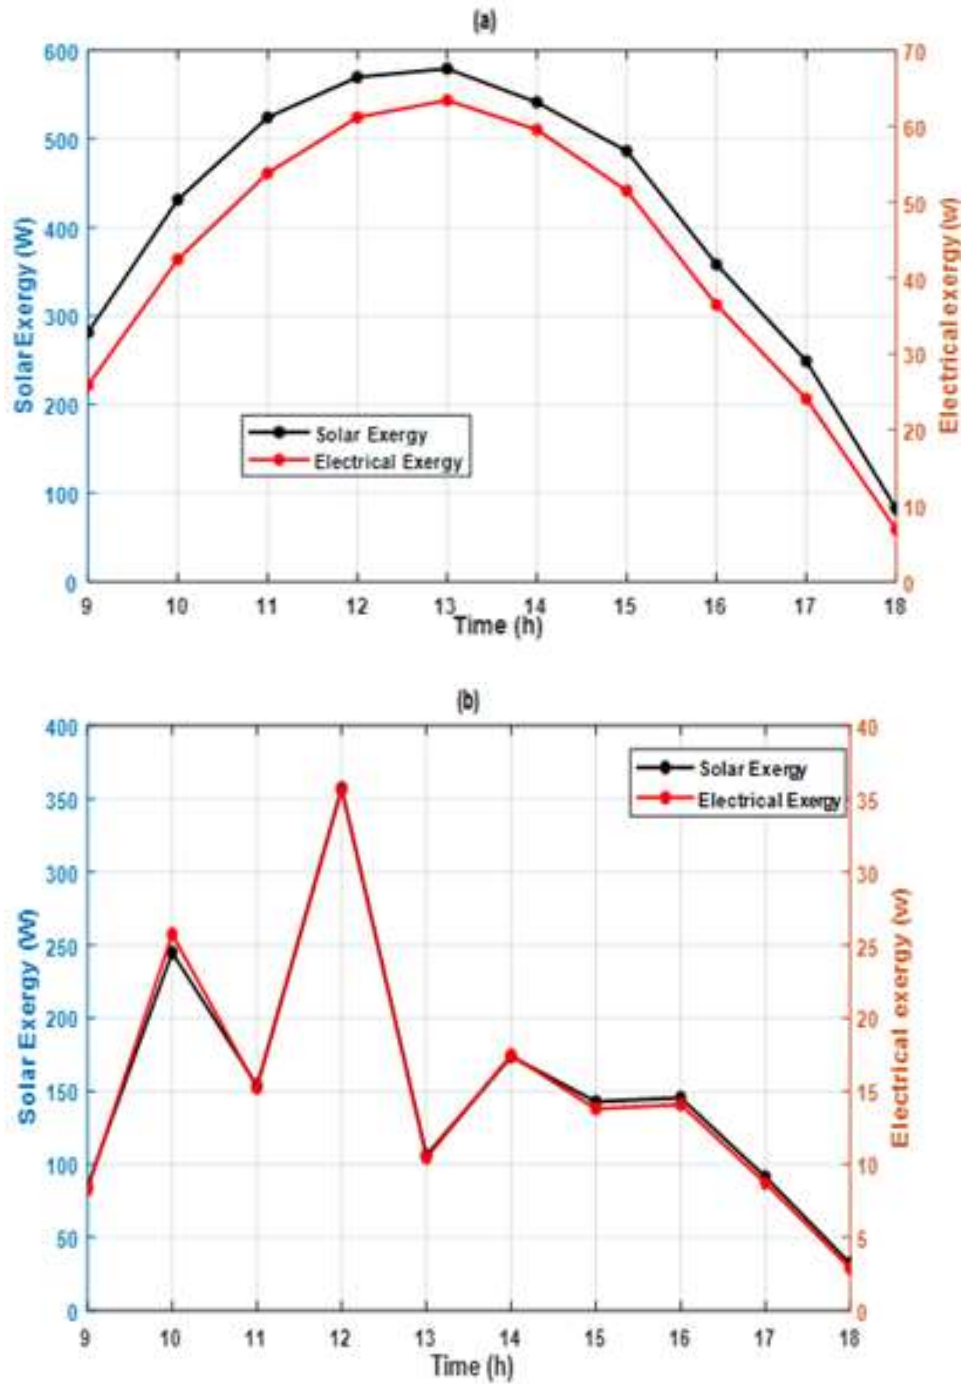


Figure 3. Variation of solar exergy and electrical exergy of a clear day (a) and a cloudy day (b).

(Figures 3 and 4).

The variation of the exergy efficiency for a clear day and a cloudy day is shown in Figure 7. From this figure, it can be seen that the exergy efficiency for a clear day varies from 4.5 to 8.93% compared to the cloudy day, whose exergy efficiency varies between 2 and 9.45%. The difference observed between the two efficiencies in

most hours can be explained by the difference between the PV module temperatures and the ambient temperatures for the two days. On the other hand, we also note that these exergy efficiencies have the same behavior and pace.

Figure 8 (a and b) shows the variations of exergy efficiency ( $\epsilon$ ), energy efficiency ( $\eta$ ) and power conversion

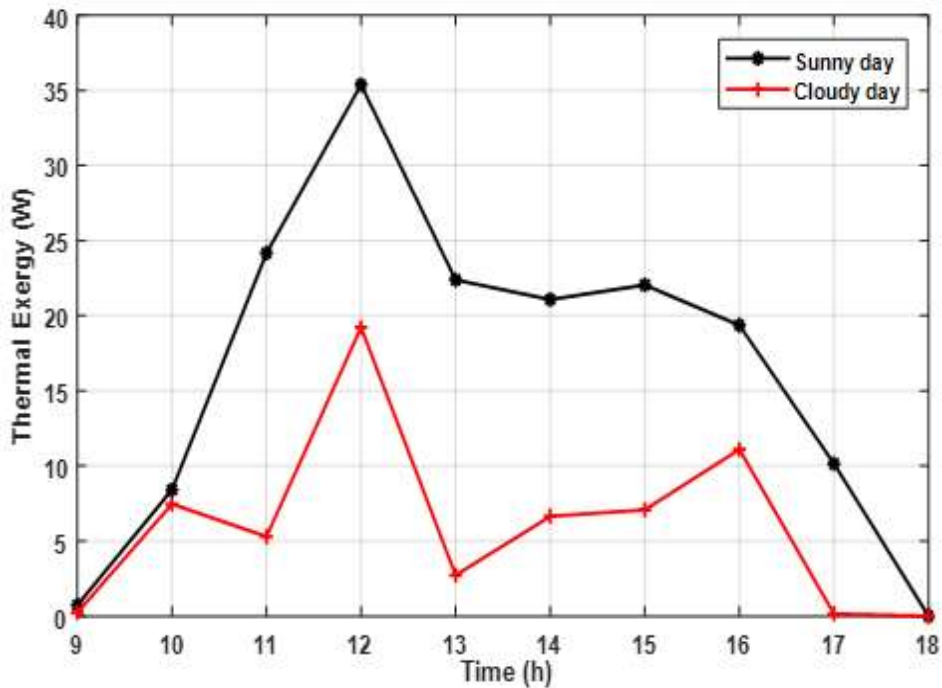


Figure 4. Thermal exergy variation of a clear sky day and a cloudy day.

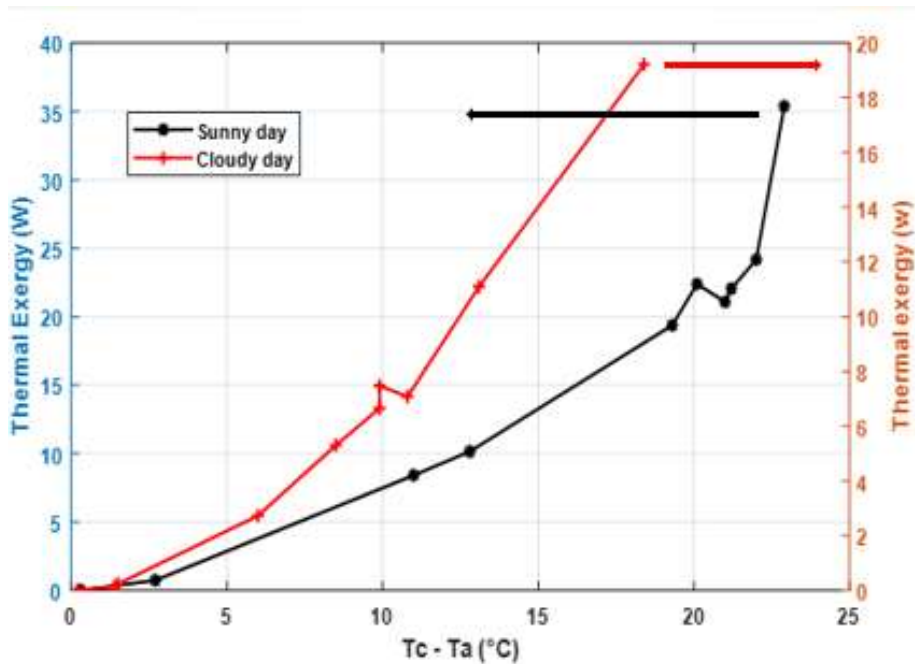


Figure 5. Variation of thermal exergy as a function of the temperature difference of a clear sky day and a cloudy day.

efficiency ( $\eta_{pc}$ ) for a clear sky day and a cloudy day respectively. Figure 8a shows that the exergy efficiency varies between 4.5 and 8.93%, the energy efficiency

varies between 11.08 and 14.5% and the power conversion efficiency varies between 7.98 and 10.49% for the clear day. Figure 8b shows that the exergy

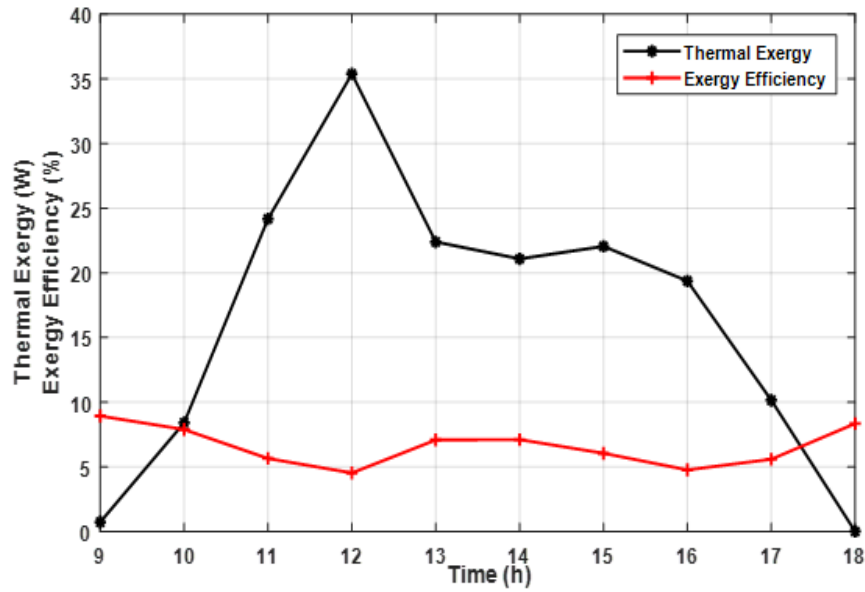


Figure 6. Variation of thermal exergy and exergy efficiency.

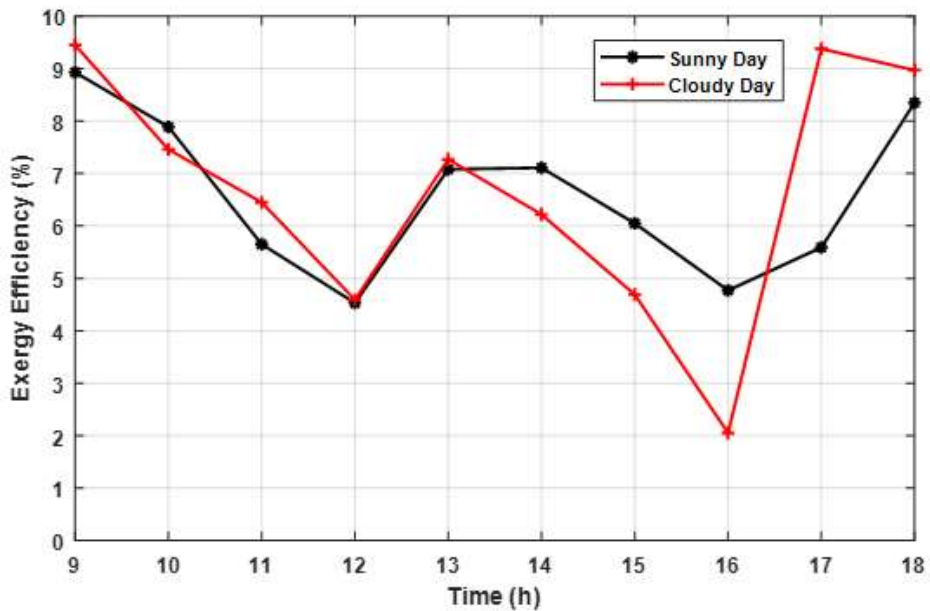
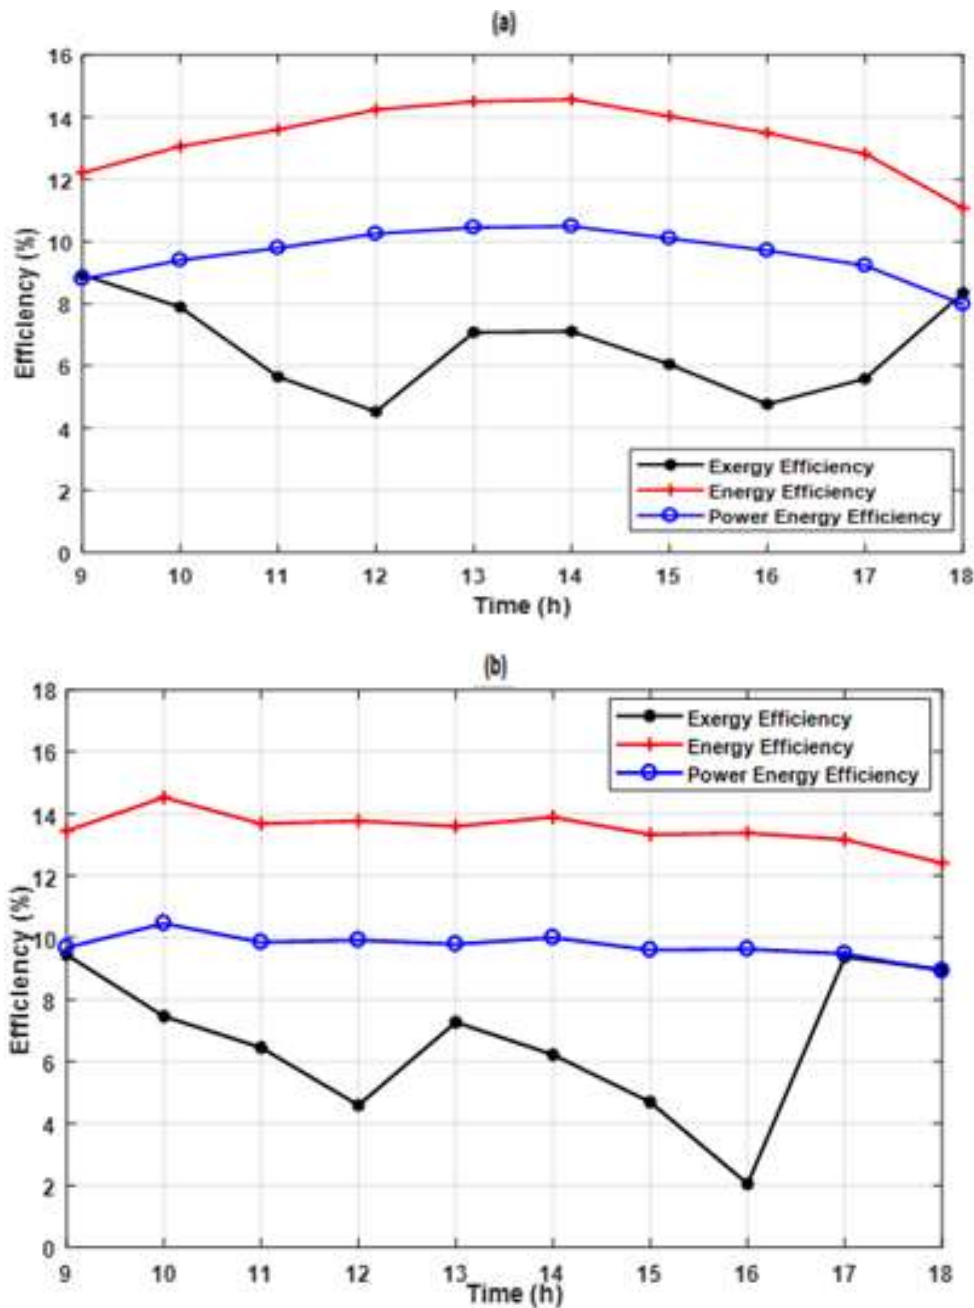


Figure 7. Variation of the exergy efficiency of a clear day and a cloudy day.

efficiency varies between 2 and 9.45%, the energy efficiency varies from 12.41 and 14.5% and the power conversion efficiency varies between 8.93 and 10.46% for the cloudy day. The energy efficiency and power conversion efficiency of the PV module is maximum corresponding to the PV module temperature of 331 K. The exergy efficiency of the PV module is maximum corresponding to the PV module temperature of 301 K for

the clear day, for the cloudy day is maximum corresponding to the PV module temperature of 307 K for the energy efficiency and power conversion efficiency of the PV module and the exergy efficiency of the PV module is maximum corresponding to the PV module temperature of 300 K. This significant difference between exergy efficiency and energy efficiency can be explained by the fact that the exergy efficiency takes into account



**Figure 8.** Variation of exergy, energy and power conversion efficiency for a clear day (a) and a cloudy day (b).

heat losses during the conversion process, while energy efficiency does not consider it.

On the other hand, we notice that the curves are the same whatever the type of day (clear or cloudy). Which is important is to see that these losses have little effect on the energy and conversion efficiencies compared to that of the exergy, which is related to the variation of temperature and having the same pace as these exergy curves in opposed sense.

## Conclusion

This work focuses on a photovoltaic solar module performance study based on energy and exergy analysis in the Ziguinchor region of Senegal. The experimental data obtained by accurate measurements during two days: a clear sky day (20 March 2018) and a cloudy day (27 March 2018). The data for these two days were analyzed to evaluate the maximum efficiency of the

photovoltaic solar module. The thermal exergy Losses in the photovoltaic conversion process are also quantified. The following conclusions were drawn:

- (1) The photovoltaic module has a low exergy efficiency of 6.59% for the clear sky day and 6.65% for the cloudy sky day. Exergy analysis has shown that current silicon modules do not benefit much from the high exergy content of solar radiation.
- (2) The exergy, energy and power conversion efficiency values of the solar module are respectively 6.59, 13.36 and 9.96% for the clear day and 6.65, 13.52 and 9.73% for the cloudy day.
- (3) The exergy efficiency PV decreases as solar radiation and ambient temperature increase due to the increase of temperature and irreversibility of the cell, while the electricity produced increases.
- (4) The studied photovoltaic module which has a maker reported efficiency value of 0.145 at STC compared is degraded by 54.5% of exergy efficiency, 7.86% of energy efficiency and 31.31% of power conversion efficiency for the clear day and degraded by 54.13% of exergy efficiency, 6.75% of energy efficiency and 32.89% of power conversion efficiency for the cloudy day.
- (5) In order to have maximum exergy efficiency, PV module temperature should be kept near the cell operating temperature or in other words, PV module temperature should be controlled by surface cooling of the panel using water/air.

## CONFLICT OF INTERESTS

The authors have not declared any conflict of interests.

## Nomenclature:

$I_{sc}$	short circuit current (A)
$V_{oc}$	Open circuit voltage (V)
G	Solar radiation intensity ( $W/m^2$ )
A	Solar photovoltaic module area. ( $m^2$ )
$T_{sun}$	Sun temperature ( $^{\circ}C$ )
$T_a$	Ambient temperature ( $^{\circ}C$ )
$T_c$	PV module temperature ( $^{\circ}C$ )
FF	Fill factor (-)
$\epsilon$	Exergy efficiency (%)
$\eta$	Energy efficiency (%)
$\eta_{pc}$	Power conversion efficiency

## REFERENCES

- Abid M, Hepbasli A (2015). Dynamic Exergetic Analysis and Evaluation of Photovoltaic Modules. *Energy Sources Part A: Recovery, Utilization and Environmental Effects* 37:2271-2284.
- Ajam H, Farahat S, Sarhaddi F (2005). Exergetic optimization of solar air heaters and comparison with energy analysis. *International Journal of Thermodynamics* 8(4):183-190.
- Akyuz E, Coskun C, Oktay Z, Dincer I (2012). A novel approach for estimation of photovoltaic exergy efficiency. *Energy*. 44(1):1059–1066.
- Aoun N, Nahman B, Chenni R (2014). Study of Experimental Energy and Exergy of mono-crystalline PV Panel in Adrar Region, Algeria. *International Journal of Scientific and Engineering Research* 5(10):2229-5518.
- Cheikh EB, Ndiaye ML Ndiaye AB, Ndiaye PA (2015). Outdoor performance analysis of a monocrystalline photovoltaic module: Irradiance and temperature effect on exergetic efficiency. *International Journal of Physical Sciences* 10(11):351-358.
- Dincer I, Rosen MA (2005). Thermodynamic aspects of renewables and sustainable development. *Renewable and Sustainable Energy Reviews* 9(2):169-189.
- Hill R (1999). Prospects for Photovoltaic. *Energy World* 208:8-11.
- Joshi AS, Dincer I, Reddy BV (2009). Thermodynamic assessment of photovoltaic systems. *Solar Energy* 83:1139-1149.
- Özalp M, Bayat M (2017). A comparative thermodynamic analysis on different exergetic efficiency methods for a solar photovoltaic module. *International Journal of Exergy* 24(2/3/4).
- Pandey A, Pant P, Sastry O, Kumar A, Tyagi S (2015). Energy and exergy performance evaluation of a typical solar photovoltaic module. *Thermal Science* 19(2):625-636.
- Rajput P, Tiwari GN, Sastry OS (2016). Thermal modelling and experimental validation of hot spot in crystalline silicon photovoltaic modules for real outdoor condition. *Solar Energy* 139:569-580.
- Sahin AD, Dincer I, Rosen MA (2007). Thermodynamic analysis of solar photovoltaic cell systems. *Solar Energy Materials and Solar Cells* 91:153-159.
- Shukla KN (2015). A comparative study of exergetic performance of amorphous and polycrystalline solar PV modules. *International Journal of Exergy* 17(4).
- Shukla A, Khare M, Shukla KN (2015). Experimental Exergetic Performance Evaluation of Solar PV Module. *International Journal of Scientific and Research Publications* 5(1):2250-3153.
- Sandnes B (2003). Exergy Efficient Production, Storage and Distribution of Solar Energy, University of Oslo.
- Yang HX, Lu L, Zhou W (2007). A novel optimization sizing model for hybrid solar-wind power generation system. *Solar Energy* 81(1):76-84.

## Related Journals:

