

OPEN ACCESS



African Journal of
**Environmental Science and
Technology**

May 2020
ISSN 1996-0786
DOI: 10.5897/AJEST
www.academicjournals.org



**ACADEMIC
JOURNALS**
expand your knowledge

About AJEST

African Journal of Environmental Science and Technology (AJEST) provides rapid publication (monthly) of articles in all areas of the subject such as Biocidal activity of selected plant powders, evaluation of biomass gasifier, green energy, Food technology etc. The Journal welcomes the submission of manuscripts that meet the general criteria of significance and scientific excellence. Papers will be published shortly after acceptance. All articles are peer-reviewed

Indexing

The African Journal of Environmental Science and Technology is indexed in:

[CAB Abstracts](#), [CABI's Global Health Database](#), [Chemical Abstracts \(CAS Source Index\)](#), [China National Knowledge Infrastructure \(CNKI\)](#), [Dimensions Database](#), [Google Scholar](#), [Matrix of Information for The Analysis of Journals \(MIAR\)](#), [Microsoft Academic](#)

AJEST has an [h5-index of 14](#) on Google Scholar Metrics

Open Access Policy

Open Access is a publication model that enables the dissemination of research articles to the global community without restriction through the internet. All articles published under open access can be accessed by anyone with internet connection.

The African Journal of Environmental Science and Technology is an Open Access journal. Abstracts and full texts of all articles published in this journal are freely accessible to everyone immediately after publication without any form of restriction.

Article License

All articles published by African Journal of Environmental Science and Technology are licensed under the [Creative Commons Attribution 4.0 International License](#). This permits anyone to copy, redistribute, remix, transmit and adapt the work provided the original work and source is appropriately cited. Citation should include the article DOI. The article license is displayed on the abstract page the following statement:

This article is published under the terms of the [Creative Commons Attribution License 4.0](#)

Please refer to <https://creativecommons.org/licenses/by/4.0/legalcode> for details about [Creative Commons Attribution License 4.0](#)

Article Copyright

When an article is published by in the African Journal of Environmental Science and Technology, the author(s) of the article retain the copyright of article. Author(s) may republish the article as part of a book or other materials. When reusing a published article, author(s) should; Cite the original source of the publication when reusing the article. i.e. cite that the article was originally published in the African Journal of Environmental Science and Technology. Include the article DOI Accept that the article remains published by the African Journal of Environmental Science and Technology (except in occasion of a retraction of the article) The article is licensed under the Creative Commons Attribution 4.0 International License.

A copyright statement is stated in the abstract page of each article. The following statement is an example of a copyright statement on an abstract page.

Copyright ©2016 Author(s) retains the copyright of this article.

Self-Archiving Policy

The African Journal of Environmental Science and Technology is a RoMEO green journal. This permits authors to archive any version of their article they find most suitable, including the published version on their institutional repository and any other suitable website.

Please see <http://www.sherpa.ac.uk/romeo/search.php?issn=1684-5315>

Digital Archiving Policy

The African Journal of Environmental Science and Technology is committed to the long-term preservation of its content. All articles published by the journal are preserved by [Portico](#). In addition, the journal encourages authors to archive the published version of their articles on their institutional repositories and as well as other appropriate websites.

<https://www.portico.org/publishers/ajournals/>

Metadata Harvesting

The African Journal of Environmental Science and Technology encourages metadata harvesting of all its content. The journal fully supports and implement the OAI version 2.0, which comes in a standard XML format. [See Harvesting Parameter](#)

Memberships and Standards



Academic Journals strongly supports the Open Access initiative. Abstracts and full texts of all articles published by Academic Journals are freely accessible to everyone immediately after publication.



All articles published by Academic Journals are licensed under the [Creative Commons Attribution 4.0 International License \(CC BY 4.0\)](#). This permits anyone to copy, redistribute, remix, transmit and adapt the work provided the original work and source is appropriately cited.



[Crossref](#) is an association of scholarly publishers that developed Digital Object Identification (DOI) system for the unique identification published materials. Academic Journals is a member of Crossref and uses the DOI system. All articles published by Academic Journals are issued DOI.

[Similarity Check](#) powered by iThenticate is an initiative started by CrossRef to help its members actively engage in efforts to prevent scholarly and professional plagiarism. Academic Journals is a member of Similarity Check.

[CrossRef Cited-by](#) Linking (formerly Forward Linking) is a service that allows you to discover how your publications are being cited and to incorporate that information into your online publication platform. Academic Journals is a member of [CrossRef Cited-by](#).



Academic Journals is a member of the [International Digital Publishing Forum \(IDPF\)](#). The IDPF is the global trade and standards organization dedicated to the development and promotion of electronic publishing and content consumption.

Contact

Editorial Office: ajest@academicjournals.org

Help Desk: helpdesk@academicjournals.org

Website: <http://www.academicjournals.org/journal/AJEST>

Submit manuscript online <http://ms.academicjournals.org>

Academic Journals
73023 Victoria Island, Lagos, Nigeria
ICEA Building, 17th Floor,
Kenyatta Avenue, Nairobi, Kenya.

Editors

Prof. Sulejman Redzic

Faculty of Science
University of Sarajevo
Bosnia and Herzegovina.

Dr. Guoxiang Liu

Energy & Environmental Research Center
(EERC)
University of North Dakota (UND)
North Dakota 58202-9018
USA

Prof. Okan Külköylüoğlu

Faculty of Arts and Science
Department of Biology
Abant İzzet Baysal University
Turkey.

Dr. Abel Ramoelo

Conservation services,
South African National Parks,
South Africa.

Editorial Board Members

Dr. Manoj Kumar Yadav

Department of Horticulture and Food
Processing
Ministry of Horticulture and Farm Forestry
India.

Dr. Baybars Ali Fil

Environmental Engineering
Balıkesir University
Turkey.

Dr. Antonio Gagliano

Department of Electrical, Electronics and
Computer Engineering
University of Catania
Italy.

Dr. Yogesh B. Patil

Symbiosis Centre for Research & Innovation
Symbiosis International University
Pune,
India.

Prof. Andrew S Hursthouse

University of the West of Scotland
United Kingdom.

Dr. Hai-Linh Tran

National Marine Bioenergy R&D Consortium
Department of Biological Engineering
College of Engineering
Inha University
Korea.

Dr. Prasun Kumar

Chungbuk National University,
South Korea.

Dr. Daniela Giannetto

Department of Biology
Faculty of Sciences
Mugla Sıtkı Koçman University
Turkey.

Dr. Reem Farag

Application department,
Egyptian Petroleum Research Institute,
Egypt.

Table of Content

Assessment of agricultural practices on water quality of the Tono Dam in the Upper East Region of Ghana	114
Melvin-Guy Adonadaga, Cornelius Frimpong, Boateng Ampadu, Rahinatu Alare and George Owusu	
The mediating effect of effective decision making on the design of water resource management ICT model: The case of the management of Lake Victoria Basin	123
Godfrey Odongtoo, Denis Ssebuggwawo and Peter Okidi Lating	

Full Length Research Paper

Assessment of agricultural practices on water quality of the Tono Dam in the Upper East Region of Ghana

Melvin-Guy Adonadaga*, Cornelius Frimpong, Boateng Ampadu, Rahinatu Alare and George Owusu

Department of Environmental Science, Faculty of Earth and Environmental Sciences,
University for Development Studies, P. O. Box 24, Navrongo, Ghana.

Received 25 November, 2019; Accepted 31 January, 2020

Population growth has resulted in drastic increase in demand for agricultural products for consumption and also as raw materials for agro-based industries. Associated with this increased demand is the application of agrochemicals to increase yields. This study assessed the impact of agricultural practices employed by farmers in the Tono catchment in the Upper East Region of Ghana on water quality. The study involved a combination of surveys and laboratory analyses. Structured questionnaires were administered to farmers to determine the various agricultural practices employed towards increasing crop yields as well as their knowledge on the environmental effects of these practices among others. Laboratory analysis was performed to determine the levels of physicochemical parameters of the reservoir water so as to ascertain its pollution level. The study showed that farmers in the catchment used mechanized ploughs to till their lands and applied fertilizer and other agrochemicals to increase yield. These practices potentially can pose serious threats on water quality of the reservoir. Although the levels of all the parameters analyzed were within the WHO guideline values, it is recommended that farmers within the area should be educated on proper application of agrochemicals and farming practices in order to ensure that the quality of the water is maintained. In particular, farming around the intake areas of the dam should be prohibited as this constitutes a major source of sediment into the reservoir.

Key words: Agricultural practices, agrochemical usage, surface water quality.

INTRODUCTION

Agriculture comprises mainly farm lands of large and small sizes where crops and animals are produced individually or simultaneously. Even though farm sizes in Ghana are small, the traditional method of farming has also changed over time. These days, the time frame of rotations has been reduced and farming has been

targeted on commercially productive crops. In addition, agriculture has become more intensive with the requirement for the use of heavy machinery, agricultural inputs such as fertilizers, agrochemicals, and large irrigation schemes. These practices that are carried out to increase crop production can impact on water quality

*Corresponding author. E-mail: amelvin@uds.edu.gh.

through the introduction of nutrients as a result of soil tillage and application of fertilizer, and other agrochemicals such as pesticides into the aquatic ecosystems. Also, contamination from pathogenic organisms in manure adhered to soil carried in run-offs (FAO, 1995). In the literature, a range of pollutants from non-point sources have increased to include visible matter, suspended solids, oxygen-demanding materials, nutrients, pathogenic microorganisms, heavy metals, pesticides, and hydrocarbons (Adams et al., 2006). The Eriksson et al. (2007)'s priority pollutant list includes the most common water quality parameters such as organic and suspended matter, nutrients, pH and heavy metals such as, copper, cadmium, nickel, lead, platinum, chromium and zinc, and polycyclic aromatic hydrocarbons (PAHs). A major source of these in surface water is from agricultural inputs such as chemical fertilizers (Robinson et al., 2007).

The impacts of agriculture on water quality depend on both large and small scale factors. Large scale factors such as landscape, topography, climate and parent material have large impacts on farming areas. These factors characterize the ecosystems and determine the type of farming practices that are possible in the area. Small scale factors such as land use change, pollution and degradation can also impede on the quality of water in a particular area. Tillage is mainly of three types- the conventional tillage, conservation tillage and No-till. Tillage of farmlands in all its types including digging, stirring, and turning over is to make the soil loosed. Tilling can be man-powered, draft animal-powered or mechanized. Generally, fertilizer refers to any substance, organic or inorganic, added to the soil or applied on the leaves of plants to help increase the rate of growth. Nitrogen, phosphorous and potassium are the main elements required by plants for growth. Any substance that supplies just one of the three principal macronutrients is a straight fertilizer while mixed fertilizers are those materials that supply more than one principal nutrient. The elevated rate of fertilizers application as in quantity and frequency usually overtakes the natural ability of the soil to retain and change the nutrients and harmonizing their availability with crop demands

After continuous tillage, the soil becomes hard just below the depth of the tillage. This greatly affects soil water drainage as soil compaction increases surface runoff since less rainwater is permitted to percolate. This can increase the risk of erosion, and in return leading to loss of the surface soil and nutrients, and non-point source pollution of aquatic ecosystems. Sediments from surface and bank side erosion enter streams and rivers and it is considered to be a major surface water pollutant (Tebrügge and Düring, 1999; FAO, 1996). Precipitation events in particular contribute to increased concentrations of suspended matter in water bodies. Sediment deposition also contributes to changes in channel formation and flow characteristics. Also, suspended matter reduces the amount of light that is able to penetrate inside the water;

turbid water may impede feeding mechanisms and respiration of large invertebrates and fish (Doeg and Koehn, 1994; Wood and Armitage, 1997; Relyea et al., 2000).

In addition, the oversaturation of soil with nutrients allows precipitation to carry the extra nutrients into water systems through runoff, and erosion. The eroding and transport of soil particles and fine silt from farmlands into aquatic ecosystems is a major cause of introduction of nutrients from fertilizers applied on farm lands. Excessive supply of inorganic nitrogen and phosphorus compounds leads to elevated nitrification, high oxygen demand and production of toxic un-ionized ammonia. The impact of these nutrients on ponds, lakes, seas and oceans includes enrichment of water courses, increased nitrification, increased oxygen demand. Studies by the UK government showed that pesticides concentrations exceeded those allowable for drinking water in some samples of river water and groundwater (White and Hammond, 2009). Fish and other aquatic biota may be harmed by pesticide contaminated water. Surface runoff into rivers and streams can be highly lethal to aquatic life, sometimes killing all the fish in a particular stream.

The Tono dam promotes dry season production of food crops (vegetables and cereals) and as a source of water for livestock, and as such is very important to the people of the Upper East region and the country as a whole. This research sought to determine the various agricultural practices carried out in the catchment area of the dam, and to also assess the levels of physicochemical parameters in the reservoir. The outcome of this project will be useful to all stakeholders and also inform policy making with regards to regulating agricultural activities around the dam in order to ensure its sustainability.

MATERIALS AND METHODS

Study area

The study area (Tono watershed) lies in the Kassena-Nankana District within the Guinea Savannah woodlands. The district falls approximately between latitude 11° 10" and 10° 3" North and longitude 1° West in the Upper East region of Ghana (Figure 1). The climate of the Tono watershed is mainly characterized by the dry and wet seasons, which are influenced by two air masses namely the North-East trade winds and the South-Westerly (tropical maritime). Day temperatures are as high as 42°C in March while night temperatures reach a low of 18°C around December. The Municipality observes the tropical maritime air mass between May and October. The average annual rainfall is 950 mm (GSS, 2014).

The catchment is mainly covered by the Sahel and Sudan Savannah types of vegetation consisting of open savannah with fire-swept grassland interspersed with deciduous trees. However, due to anthropogenic activities the woodland savannah has been reduced to open lands with economic trees such as baobab, acacia, sheanut and dawadawa which have been retained over time. There are two main types of soil found within the watershed namely groundwater laterite and savannah ochrosols. The drainage system of the catchment area is constituted mainly around the tributaries of the Sissili River, Asibelika, Afumbeli, Bukpegi and Beeyi. A tributary of the Asibelika River (Tono River) is the one

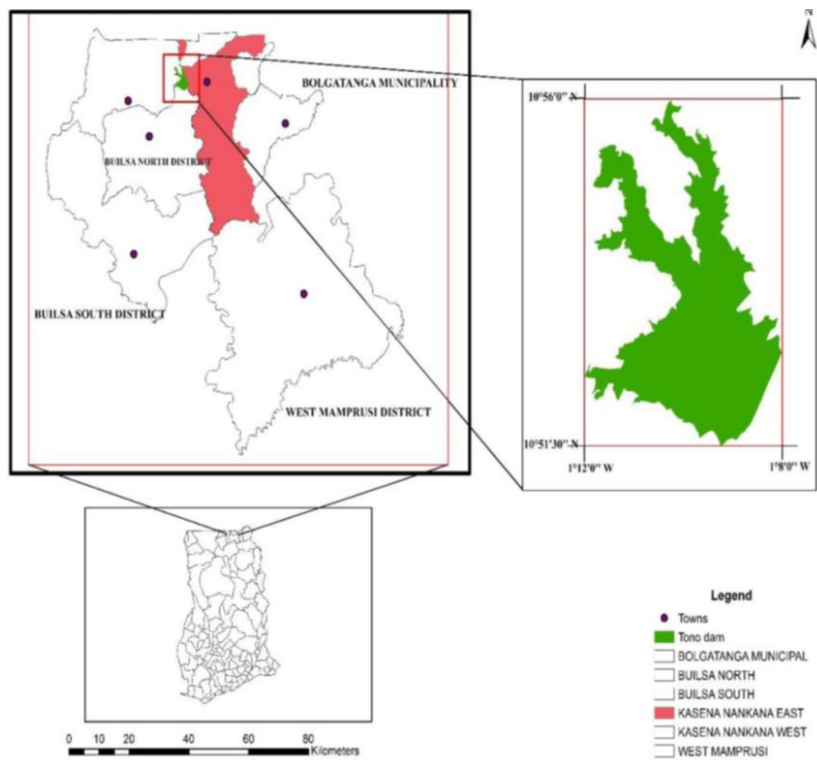


Figure 1. Map of the study area.

dammed to provide irrigation services to the municipality. The topography is low-lying and undulating and consists of elevations which range from 200 to 300 m (GSS, 2014).

Field reconnaissance survey

A preliminary field survey was conducted at the study area to gather initial information about the dam. A survey was also done to determine some of the general characteristics of the study area with respect to the location of farmlands around the dam, and also to interact with farmers in order to gather information towards the questionnaire design. The research was conducted from January, 2018 to May, 2018.

Survey

Structured questionnaires were administered to 193 farmers within the catchment area of the Tono Dam in order to obtain information on the various agricultural practices carried out on the farms in the catchment area. The questionnaires helped to know some of the economic and social factors that drive farmers to employ the various agricultural practices. Additionally, the survey helped to assess the knowledge of the farmers with regards to the following: usage of agrochemicals, reading of labels on agrochemicals before purchase and application, safe disposal of containers and residues of agrochemicals, and general agricultural practices in the catchment area of the dam. In determining the sample size, the following mathematical formula was used: $n = \frac{N}{1+N(\alpha)^2}$ (Puopiel, 2010) where n is the sample size, N is the population and α is the

margin of error which in this study was chosen as 0.1 with confidence interval of 90%.

Water sampling procedure

The dam was divided into 3 sections; A, B, C (Figure 2). Section A represents the upstream portion of the dam where water enters from the tributaries; Section B represents the midstream; and Section C represents the area closer to the embankment wall. Three samples were taken in duplicates from each section across the length at approximately 100m apart as shown in Figure 2. In all, 18 samples were collected for analysis. This was to compare the levels of the various parameters with distance from shore in order to ascertain the impacts of anthropogenic activities on the quality of water in the dam. Plastic bottles, each of 1.5 litre volume were used as sample containers. Sample containers were thoroughly washed with distilled water and then rinsed with water from the sampling area before collecting the samples. The samples were taken at a depth of not more than 1m from the surface of the water and stored in an ice chest and transported to the laboratory for analysis.

Analytical methods

The samples were analyzed for the following physicochemical parameters using standard methods (APHA, 1998): pH, electrical conductivity, turbidity, total dissolved solids (TDS), ammonia ($\text{NH}_4\text{-N}$), nitrate ($\text{NO}_3\text{-N}$) and phosphate ($\text{PO}_4\text{-P}$). Measured values were then compared with WHO (2017) water quality standards in order to ascertain the level of pollution of the dam. A brief description of the various methods is given as follows. Turbidity was determined with DR LANGE LPG325 turbidity meter. Standard solution was used to

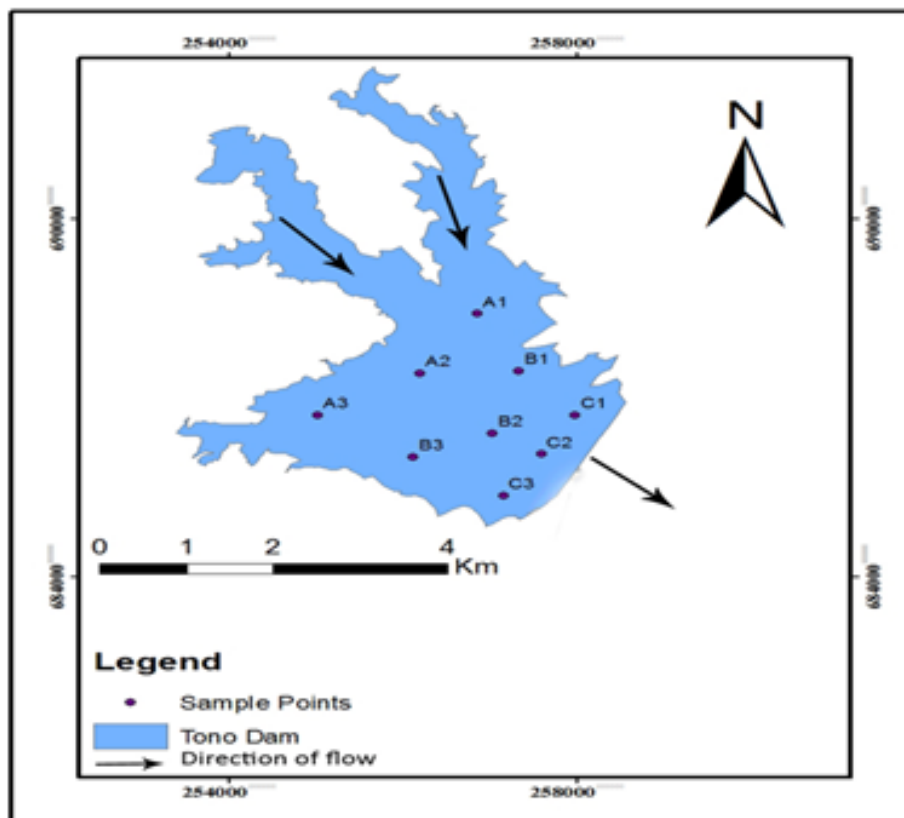


Figure 2. Map of the Tono Dam showing the location of the sampling points.

calibrate the meter after which the probe was dipped into the sample and the readings recorded. pH was measured using a pH meter (WTW pH325). Standard solutions were prepared by dissolving the standard pH buffer tablets in distilled water. An indicator electrode (pH Electrode) in conjunction with a reference electrode was first dipped in the standard solutions to confirm their pH. The electrode was then rinsed with distilled water and dipped in the sample to measure the pH value. Turbidity and pH measurements were done on-site. Gravimetric method was applied in the determination of Total Dissolved Solids, while electrical conductivity was determined using the EC meter. This meter measures the resistance offered by the aquatic system in between two platinized electrodes. The instrument was standardized with known values of conductance compared with a standard solution of KCl. Nitrate determination was based on the principle of formation of 5-nitrosalicylic acid complex under highly acidic conditions as described by Adonadaga (2014). Determination of ammonium was based on the formation of potassium iodide-amalgam. Five ml of appropriately diluted sample was mixed with 200 μ l of potassium sodium tartrate solution and 200 μ l Nessler's reagents and thoroughly stirred. Samples were allowed to stand for five to eight minutes leaving a golden yellow coloration, and then measured photometrically at 425 nm with a UV/VIS spectrophotometer (SHIMADZU UV-2459). Phosphorus was determined based on the ascorbic acid method. This method relies on the fact that orthophosphate reacts, in acid medium, with ammonium molybdate and potassium antimonyl tartrate to form phosphomolybdic acid. This is reduced by ascorbic acid to form highly coloured molybdenum blue which can be measured in a spectrophotometer at 880 nm wavelength.

RESULTS AND DISCUSSION

Survey

Of the total number of farmers interviewed, 43% of them had some form of education, with the highest level being Senior High School. In terms of farm size, the highest was four acres representing 10%, an indication that most of the farming activities were done on subsistence basis. With regard to the number of visits per day, the highest response (34.7%) was for three visits, and although others visited more than three times a day, the explanation was that the number of visits generally depends on the stage of the crops and vegetables planted. So at the early stages, the visits are more frequent compared to when the plants have survived and are now at the growing stage. The survey results also showed that about 96% of the farmers apply agrochemicals especially chemical fertilizers on their farms. When asked why the preference for chemical fertilizers instead of organic fertilizers, they responded that the chemical fertilizers were readily available and easy to apply. When asked the specific names of agrochemicals they apply, most of them (78.2%) were unable to mention any names. They explained that the agrochemical dealers provided them with the specific

Table 1. Levels of physicochemical parameters at the sampling points.

Parameter/Sample	A1	A2	A3	B1	B2	B3	C1	C2	C3	WHO (2017) guidelines
pH	8.54	8.14	8.04	8.23	8.46	8.23	8.53	8.18	8.27	6.5-8.5
TURBIDITY(NTU)	4.6	4.1	4.8	3.0	2.3	2.1	1.1	1.6	1.9	5
E.C ($\mu\text{S}/\text{cm}$)	88.9	79.8	79.7	80.1	79.5	79.5	79.4	81.7	79.5	1000
TDS (mg/L)	59.4	53.3	53.3	53.5	53.1	53.1	53.1	54.8	53.1	500
AMMONIA(mg/L)	0.875	0.846	0.898	1.046	2.373	1.070	0.865	0.979	0.927	1.5
NITRATE(mg/L)	1.135	1.485	1.609	1.451	0.955	1.428	1.225	1.564	1.00	10
PHOSPHATE(mg/L)	0.045	0.038	0.043	0.041	0.043	0.041	0.046	0.075	0.094	-

Table 2. Values of turbidity (NTU).

	Upstream			Midstream			Downstream		
Sample ID	A1	A2	A3	B1	B2	B3	C1	C2	C3
Reading (NTU)	4.6	4.1	4.8	3.0	2.3	2.1	1.1	1.6	1.9

chemicals based on the description of the problem on their farms. In other words, the farmer needs to only tell the agrochemical dealer that he has weeds on his maize farm and the agrochemical dealer provides him with the chemical for that purpose. When asked if they wear protective gear during chemical application, 92.2% of them responded in the affirmative, an indication of their awareness of the potential health hazards associated with the usage of these chemicals. However, an inspection of the protective gears showed that nose mask was the one mostly used.

Physicochemical analysis

Levels of all the measured physicochemical parameters are shown in Table 1. Two measurements were made for each parameter and an average was calculated.

pH

The pH values ranged from 8.04 to 8.54, with sampling point A1 exceeding the WHO guideline upper limit of 8.5 (Table 1; Figure 3). Several factors, both natural and anthropogenic, could account for these levels of pH in the water samples. The process of photosynthesis by algae and plants use of hydrogen, which could have also contributed to this increased pH level (Lachhab et al., 2014). All the samples collected at each point are alkaline in nature. The observed changes may be due to excessive fertilizer application in the farms in the catchment area of the dam.

Turbidity

The turbidity values of the water samples ranged from 1.1

NTU to 4.6 NTU, with the highest turbidity value occurring at sampling point A1 (Table 2). However from the results obtained, none of the water samples exceeded the WHO recommended acceptable limit of 5.00 NTU. Results obtained from the analyses show that turbidity decreases as you move from the source (A) to the embankment wall (C). The amount and size of suspended sediment is dependent on water flow (Murphy, 2007). As the flow rate decreases towards the embankment, there is more sedimentation and hence less turbidity. Higher turbidity values in samples closer to the source can be attributed to the fact that runoff water coming with high flow rates from farms contains much sediment, inorganic and organic matter. It is thought that 75% of sediments polluting water bodies are derived from farming (Collins and Anthony, 2008). The sediments from farms may contain clay, silt, organic and inorganic matter, plankton, bacteria etc. (APHA, 1998). The dam also becomes deeper as you move towards the embankment wall (C). Most primary producers (plankton and bacteria) dwell in the shallow parts of the ecosystem where nutrients are abundant, hence making the deeper parts much clearer than the shallow parts. High flow rates keep particles suspended instead of settling to the bottom. In aquatic ecosystems with naturally-occurring high flows, turbidity can be high (Perlman, 2014). Anthropogenic activities are also higher at the shallow parts contributing to high turbidity.

Total dissolved solids

The Total Dissolved Solids (TDS) of the analyzed samples ranged from 53.1 to 59.5 mg/L. TDS decreased downstream from A1 (Upstream) to C1 (Downstream). The same also occurs on the other side, thus from A3 (Upstream) to C3 (Downstream) (Table 3). This can be

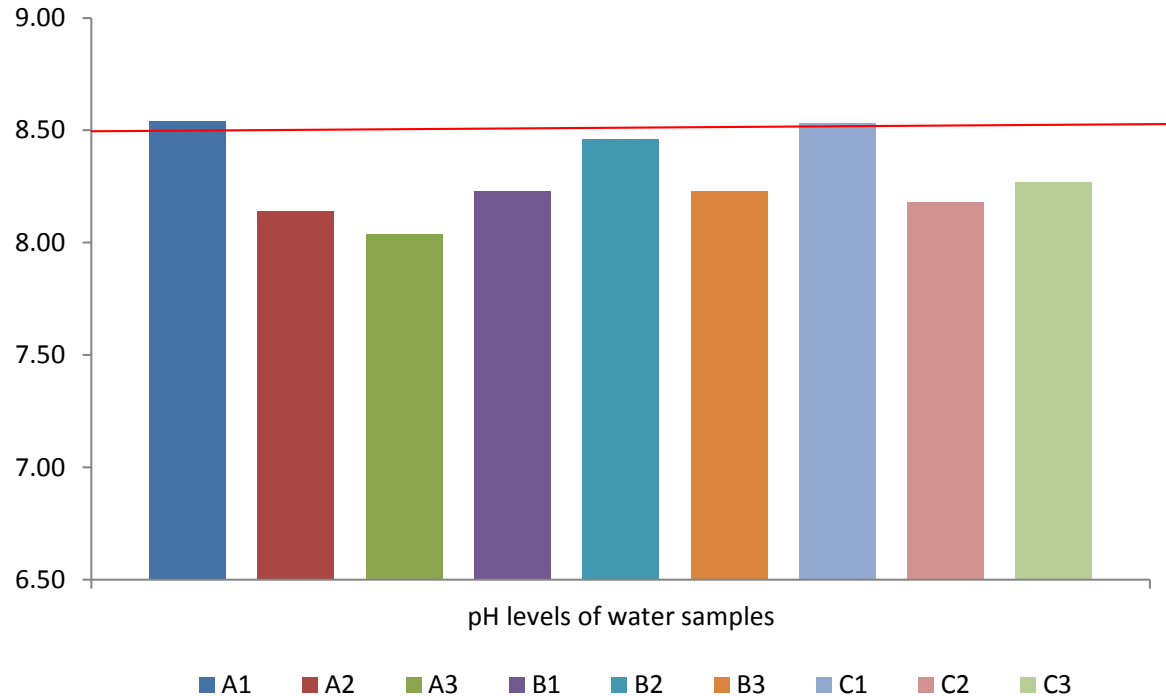


Figure 3. pH values of the water samples.

Table 3. Values of TDS of the samples (mg/L).

	UPSTREAM			MIDSTREAM			DOWNSTREAM		
Sample ID	A1	A2	A3	B1	B2	B3	C1	C2	C3
Reading (mg/L)	59.4	53.3	53.3	53.5	53.1	53.1	53.1	54.8	53.1

attributed to the agricultural runoffs generated on both shores finding its way to the dam carrying sediments, nutrients and organic matter.

If the catchment is altered by agricultural activities such as preparation of farmlands or other soil-disturbing use, it can accelerate erosion and runoff, thereby increasing TDS. Research has proven that during precipitation, 60-96% of the suspended solids are from surface sources rather than bank-side erosion and that sediments from agricultural areas are ten times greater than forested areas (Allan et al., 1997; Walling, 2005). None of the TDS values recorded exceeded the WHO recommended limit of 1000 mg/L .

Electrical conductivity

Electrical conductivity gives an account of all dissolved ions in a solution. A sudden increase or decrease in conductivity in a body of water can indicate pollution. The mean conductivity of all the analyzed water samples ranged from a low of 79.4 $\mu\text{S}/\text{cm}$ to a high of 88.9 $\mu\text{S}/\text{cm}$

(Table 4). Agricultural runoff will increase conductivity due to the additional chloride, phosphate and nitrate ions (EPA, 2012). The WHO maximum permissible level for electrical conductivity is 1000 $\mu\text{S}/\text{cm}$. For all the samples, EC reduced from sampling point A1 to sampling point C1; from area of low agricultural activities to area of high anthropogenic activities and intense agricultural activities. A similar trend was observed as one moved from A3 to C3 (area of lesser anthropogenic activities and intense agricultural activities). Conductivity is dependent on water temperature and TDS (Talley, 2000). There was a different situation from A2 to C2 where EC values decreased from A2 to B2 but increased at C2. In general, TDS is the sum of the cations and anions in water and because EC depends on the overall ionic concentration in water, it is often used as an index of the total dissolved solids (TDS) carried by a stream.

Ammonia

The mean value of ammonia for the eighteen analyzed

Table 4. Levels of electrical conductivity of the samples ($\mu\text{S}/\text{cm}$).

Sample ID	Upstream			Midstream			Downstream		
	A1	A2	A3	B1	B2	B3	C1	C2	C3
Reading ($\mu\text{S}/\text{cm}$)	88.9	79.8	79.7	80.1	79.5	79.5	79.4	81.7	79.5

Table 5. Ammonia concentration in the samples (mg/L).

Sample ID	Upstream			Midstream			Downstream		
	A1	A2	A3	B1	B2	B3	C1	C2	C3
Reading (mg/l)	0.875	0.846	0.898	1.046	2.373	1.070	0.865	0.979	0.927

Table 6. Nitrate concentration in the samples (mg/L).

Sample ID	Upstream			Midstream			Downstream		
	A1	A2	A3	B1	B2	B3	C1	C2	C3
Reading (mg/l)	1.135	1.485	1.609	1.451	0.955	1.428	1.225	1.103	1.00

samples ranged from 0.846 to 2.373 mg/L (Table 5).

Lower values (less than 1 mg/L) were recorded for samples collected a few meters away from the shores (A1 to A3) and the embankment wall (C1 to C3). The opposite happened at B which represents midstream where the dam is much deeper. Unlike groundwater, surface water nutrients concentrations can change rapidly owing to surface runoff of fertilizer, uptake by phytoplankton and denitrification by bacteria, (WHO, 2017). The sample B2 recorded the highest ammonia value in the midstream section. However, ammonia becomes more toxic with just a little increase in pH. All samples were alkaline in nature, meaning they have increased pH (7.19 to 8.76) and ammonia becomes more toxic as the pH increases. In aquatic ecosystems, ammonia exist in two forms, called total ammonia nitrogen. These two forms are represented chemically as NH_4^+ and NH_3 . NH_4^+ is ionized ammonia as it has a positive electrical charge; while NH_3 is termed un-ionized ammonia as it has no charge. This difference is very important because NH_3 is more toxic to aquatic organism. The odour threshold concentration level of ammonia in water is approximately 1.5 mg/L and a taste threshold of 35 mg/litre has been proposed for the ammonium cation (WHO, 2017). With regards to odour B2 exceeds the threshold but none of the samples exceeds the taste threshold.

Nitrate

The main source of nitrate is inorganic fertilizers. The mean values of nitrate for the analyzed samples ranged

from 0.955 mg/L (B2) to 1.609 mg/L (A3) (Table 6). The acceptable level of nitrate in water recommended by the WHO is 10.0 mg/L. In surface water, nitrification and denitrification may occur, depending on the temperature and the pH. Nitrate values decrease as you move from A1 to A3 indicating concentration of nitrate in runoffs from farms in A3 is higher than in A1.

In the UK, around 60% of nitrates in water bodies are estimated to have farming origins (White and Hammond, 2009). Concentration levels of nitrate increase as you move downstream from A1 to B1 where runoff is generated directly from farmlands in Gia, a very active farming community. Hence B1 recorded the highest concentration of nitrate at the midstream (Table 6). The uptake of nitrate by plants is accountable for most of the nitrate reduction in surface water and the concentration of nitrate may increase as the water moves towards the extremities of the dam (AWWARF, 1995). From the results, almost all the sample points closer the shores recorded quiet significant figures. They receive runoff first from farmlands because nitrogen levels increase with increased use of nitrogen fertilizers (Stalacke et al., 2003). Samples collected at section A recorded quiet high levels because they are closer to the shores where runoff is high. When you move midstream B2 recorded the highest value of nitrate than B1 and B3, as sample point B1 is located right on the runoff generated from Gia and moves towards the direction of B2. In some occasions, an increase in rainfall is matched with an increase in total nitrogen concentrations. Under UK climatic conditions, peaks in nutrient flows and erosion events can be observed during winter and early spring when precipitation is high and there is little crop cover to

Table 7. Levels of phosphate in the samples (mg/L).

Sample ID	Upstream			Midstream			Downstream		
	A1	A2	A3	B1	B2	B3	C1	C2	C3
Reading (mg/l)	0.045	0.038	0.043	0.041	0.043	0.041	0.046	0.075	0.094

take up mobilized nutrients. This is particularly evident in the wet season. Reduction in precipitation is only partially linked with a reduction in total nitrogen concentrations. The samples recorded lower values as rainfall was not at its peak.

Phosphate

The value of phosphate levels for the analyzed samples ranged from 0.038 to 0.094 mg/L (Table 7). From Table 7, phosphate levels are higher at A1 and A3 compared to A2 while for midstream they are higher at the center (B2) compared to B1 and B3. Higher concentration levels were recorded downstream where water exits the reservoir through the spillway to the canals and eventually to the farm. Flow paths differ between nutrient species. Phosphates may enter aquatic ecosystems from a range of sources, however with regards to the analyzed samples runoff containing fertilizer and agrochemicals from farmlands in the catchment and also washing of clothes and auto-mobiles are major contributors to the existence of phosphate in the dam. For example, phosphorus transport occurs mainly adhered to soil particles as overland flow (Defra, 2004; Hart et al., 2004). Surface runoff carrying nutrients and sediments vary seasonally and peaks are closely linked to precipitation. Under UK climatic conditions, peaks in nutrient flows and erosion events can be observed during winter and early spring when precipitation is high and there is little vegetative cover to take up dissolved nutrients. A possible attribute for the low phosphate levels recorded in the samples is the fact that rainfall was not at its peak in the area during sample collection.

Conclusion

The effects of agricultural activities on the quality of surface water in the Tono Dam was assessed in this research. The survey results revealed that majority of the farmers have not received any formal education and cannot read safety guidelines on how to safely apply agrochemicals. Results from the administered questionnaires revealed that although majority of the farmers did not read application guidelines of the agrochemicals. Additionally, laboratory analysis of samples from upstream, midstream and downstream indicated parameters such as turbidity, TDS and nutrient

levels have been impacted by these agricultural activities, thereby deteriorating the general quality of the water. In particular, upstream areas recorded very high levels of TDS and conductivity while nutrients were high in the downstream areas, although none of the areas exceeded the WHO permissible guideline values. In order to safeguard the quality of the dam, it is recommended that farming activities should not be carried out at the intake areas of the dam as this introduces a lot of sediment into the reservoir. Also, at areas where farming activities are permissible, such activities should be done a distance of at least 50 meters away from the banks. Finally, farmers within the catchment of the dam should have access to agricultural extension farmers who will provide them with knowledge on the proper application of agrochemicals.

CONFLICT OF INTERESTS

The authors have not declared any conflict of interests.

REFERENCES

- Adams B, Behera P, Li J (2006). Runoff quality analysis of urban catchments with analytical probabilistic models. *Journal of Water Resources Planning and Management* 132(1):4-14.
- Adonadaga M (2014). Nutrient Removal Efficiency of Activated Sludge Plants Treating Industrial and Municipal Wastewater in Ghana. *Journal of Environment Pollution and Human Health* 2(3):58-62.
- Allan JD, Erickson DL, Fay J (1997). The influence of catchment land use on the stream integrity across multiple spatial scales. *Freshwater Biology* 37(1):149-161.
- APHA, AWWA, WEF, (1998). Standards and methods for examination of water and wastewater, 20th edition. American Public Health Association, American Water Work Association, Water Environment Federation, Washington DC.
- Collins AL, Anthony SG (2008). Assessing the likelihood of catchments across England and Wales meeting 'good ecological status' due to sediment contributions from agricultural sources. *Environmental Science and Policy* 11(2):163-170.
- Defra. (2004). Developing Measures to Promote Catchment-Sensitive Farming. Defra Publications. https://www2.rspb.org.uk/Images/catchmentsensitivefarming_tcm9-132857.pdf
- Doeg TJ, Koehn JD (1994). Effects of draining and desilting a small weir on downstream fish and macroinvertebrates. *Regulated Rivers: Research and Management* 9(4):263-277.
- EPA (2012). pH and Conductivity in water. Monitoring and assessment. Available at www.epa.gov/water/archive
- Eriksson E, Baun A, Scholes L, Ledin A, Ahlman S, Revitt M (2007). Selected stormwater priority pollutants a European perspective. *Science of the Total Environment* 383(1-3):41-51.
- Food and Agriculture Organization of the United Nations (FAO) (1995). Reforming water resources policy. A guide to methods, processes and practices. FAO Irrigation and Drainage Paper, No. 52.

- Food and Agriculture Organization of the United Nations (FAO) (1996). Steps towards a participatory and integrated approach to watershed management. Report of the Inter-regional Project for Participatory Upland Conservation and Development, GCP/INT/542/ITA, FAO/Italy Cooperative Programme.
- Ghana Statistical Service (GSS) (2014). Population and Housing Census. Available at www.statsghana.gov.gh
- Hart MR, Quin B, Nguyen ML (2004). Phosphorus runoff from agricultural land and direct fertilizer effects: a review. *Journal of Environmental Quality* 33(6):1954-1972.
- Lachhab A, Beren M, Zuidervliet B (2014). Middle Creek Water Assessment Using Water Quality Index (WQI). *Journal of the Pennsylvania Academy of Science* 88(1):4-12
- Murphy S (2007). General information on solids in city of Boulder. USGS Water Quality Monitoring.
- Perlman H (2014). Water properties and measurements. *In USGS Water Science School*.
- Puopiel F (2010) Solid waste management in Ghana: The case study of Tamale metropolitan area Unpublished MSc Thesis, Kwame Nkrumah University of Science and Technology, Ghana.
- Relyea CD, Minshall GW, Daney RJ (2000). Stream insects as bioindicators of fine sediment. *Proceedings of the water environment federation. Watershed* 6:663-686.
- Robinson GR Jr, Larkins P, Boughton CJ, Reeds BW, Silbrell PL (2007) Assessment of contamination from arsenical pesticides use on orchards in the Great Valley region, Virginia and WestVirginia, USA. *Journal of Environmental Quality* 36(6):654-663
- Talley L (2000). Properties of Sea Water (lecture 2). In SIO: Introduction to Physical Oceanography. <http://talleylab.ucsd.edu/ltalley/sio210/oct1/index.html>
- Tebrügge F, Düring RA (1999). Reducing tillage intensity: a review of results from a long-term study in Germany. *Soil and Tillage Research* 53:15-28.
- Walling DE (2005). Tracing suspended sediment sources in catchments and river systems. *Science of the Total Environment* 344(1-3):159-184.
- White PJ, Hammond JP (2009). The sources of phosphorus in the waters of Great Britain. *Journal of Environment Quality* 38(1):13-26.
- World Health Organization (WHO) (2017). *Guidelines for Drinking Water Quality*. Geneva.
- Wood PJ, Armitage PD (1997). Biological effects of fine sediment in the lotic environment. *Environmental Management* 21(2):201-217.

Full Length Research Paper

The mediating effect of effective decision making on the design of water resource management ICT model: The case of the management of Lake Victoria Basin

Godfrey Odongtoo^{1,3*}, Denis Ssebuggwawo² and Peter Okidi Lating³

¹Department of Computer Engineering, Faculty of Engineering, Busitema University, P. O. Box 236 Tororo, Uganda.

²Department of Computer Science, Faculty of Science, Kyambogo University, P. O. Box 1, Kampala, Uganda.

³Department of Electrical and Computer Engineering, Faculty of Engineering, Makerere University, P. O. Box 7062 Kampala, Uganda.

Received 13 April, 2020; Accepted 21 May, 2020

Partial Least Square-Structural Equation Modelling (PLS- SEM) technique was employed to evaluate the mediating effects of effective decision making on water resource management policies and water resource management frameworks in the design of water resource management ICT model for an integrated water resource management of Lake Victoria Basin (LVB). Researchers took a quantitative approach using smart-PLS version 3. The sample size of 152 respondents was computed from a population size of 245 persons across districts within LVB. This study received feedback from different experts involved in the management of water resources in LVB. The findings of the study discovered that water resource management policies and water resource management frameworks are significant and had positive effects on the design of water resource management ICT model when subjected to a mediation of effective decision making. The three exogenous latent constructs without mediation wholesomely explained 39.1% of the variance (R^2) in the design of water resource management ICT model and 41.4% under the influence of a mediation. This study confirmed that effective decision making had a positive mediating effect in the relationship between the exogenous and endogenous variables. These findings can support practitioners and water managers engaged in the management of water resources in LVB and other water bodies elsewhere in the world.

Key words: ICT model, Lake Victoria Basin, PLS-SEM, integrated water resource management.

INTRODUCTION

The riparian countries that border Lake Victoria are Uganda, Kenya, Tanzania, Rwanda and Burundi (Odongtoo et al., 2018; Mongi et al., 2015). The lake basin provides major natural resources that are heavily

utilized by its bordering countries for fishing, transportation, tourism, water supply and waste disposal among others (Dauglas et al., 2014; Linuma and Tenge, 2017).

*Corresponding author. E-mail: godfreyodongtoo@gmail.com. Tel: +256772385722.

Author(s) agree that this article remain permanently open access under the terms of the [Creative Commons Attribution License 4.0 International License](https://creativecommons.org/licenses/by/4.0/)

The regions have experienced a process of rapid urbanization with intensive economic activities over the years. These urbanization is at a rate of 3% per year, which is causing land pressures, depletion of natural resources and poor disposal of dangerous waste into the lake (Bakibinge et al., 2011).

There have been some worries that some countries within LVB are using the water resources without consideration of sustainability (UNDP, 2007). This ideally calls for better management mechanisms for water resources in LVB. The challenges require innovative responses, particularly in terms of policy strategies and decision-making processes that enhance the capacity of local people to adapt to new conditions (IPCC, 2007). There must be a strong system that enforces by laws and regulations that are harmonized nationally and regionally (Okurut, 2010). In this case, it is necessary to employ an effective water resource management ICT model that can enhance communication, information sharing and enforcement of laws in the management of water resources in LVB (Odongtoo et al., 2019).

LVB needs an integrated water resource management (IWRM) which is a process that helps in formulating and implementing a shared vision, planning and management strategies for sustainable water resources utilization (Mongi et al., 2010). This is done with due consideration of all spatial and temporal interdependencies among natural processes and water uses. In order to support planning and management decision, we need knowledge in various discipline such as climatology, hydrology, socioeconomic, environmental science and agro-science from various stakeholders, so as to make critical decisions that reflects shared vision for water resource utilization. Public policy actors can develop consensus and decide on shared vision strategies based on information generated and communicated by decision support systems (DSS) such as water resource management ICT model (Mongi, et al., 2015).

IWRM has a global approach to promote the coordinated development and management of water, land and related resources in order to optimize socio-economic welfare in an equitable manner without compromising the sustainability of vital ecosystems (Mwangi et al., 2014). It requires all stakeholders onboard with strong linkages among them. This therefore calls for a system that enhances coordination and management of water resources. The National Water Policy in Uganda was adopted in 1999 and sets the stage for WRM to guide development efforts (Nsubuga et al., 2014). The policy acknowledges the need for cooperation on trans boundary WRM issues and promotes decentralization of water management functions (Bakibinge et al., 2011). It calls for a strategy for cooperation among riparian states to agree on a common decision (Kunjuzwa et al., 2020). The WRM ICT model will enhance cooperation among stakeholders in the management of LVB.

PLS-SEM employs a good procedure to determine an associations and causal relationships between variables

that are difficult to ascertain. It computes the path coefficient to assess the validity of the constructs. PLS-SEM is suitable for the analysis of quantitative data and it employs a robust bootstrapping technique to calculate the significance value of path coefficient (Shahid et al., 2018). It is therefore necessary to apply PLS-SEM to test the mediating effect of effective decision making in the relationship among the variables in the design of water resource management ICT model. The main reasons for using PLS-SEM is based on the fact that it is a non-normal data, formative measures, small sample size, and focus on prediction as the most prevalent reasons (Hair et al., 2012). There are some similar modelling software like Amos to analyze data but requires bigger sample size of at least 200 respondents, hence PLS-SEM is most preferred in this study.

Objective

The objective of this study was to apply PLS-SEM to evaluate the mediating effects of the effective decision making on the relationship between water resource management policies, water resource management frameworks and water resource management ICT model for an integrated water resource management of LVB.

MATERIALS AND METHODS

In order to evaluate the mediating effect of effective decision making in the relationship between variables in the design of water resource management ICT model, PLS-SEM was used. The proposed model was analyzed in two different ways: First: The model was analyzed before introducing the mediating variable and the hypothesized path was calculated together with the R^2 . Second: A structural model comprises of the relationships between the latent variables was analyzed by calculating the hypothesized path and R^2 when the mediating variable was introduced. The latent indicators which were obtained from literature review was appropriately grouped into four categories basing on the nature of the measurements/constructs. These are; water resource management policies, water resource management frameworks, effective decision making and water resource management ICT model.

The three classified groups were called exogenous latent constructs and the fourth group was called endogenous latent construct. The conceptual model presenting the relationship between the three exogenous latent constructs and endogenous latent construct are as shown in Figure 1, which suggested that the model was influenced by three major constructs.

Study hypotheses

Base on the objective of the research, the hypothesis were formulated. Quantitative data to test the hypothesis was collected from experts in water resource sectors and was subjected to Smart-PLS test. Some of the hypothesis passed the test and was accepted while others that failed the test was rejected as shown in Tables 2 and 3. Hypothesis 1 (H_1): Water resource management policies is significant and positively related to Water Resource Management ICT model. Hypothesis 2 (H_2): Water resource

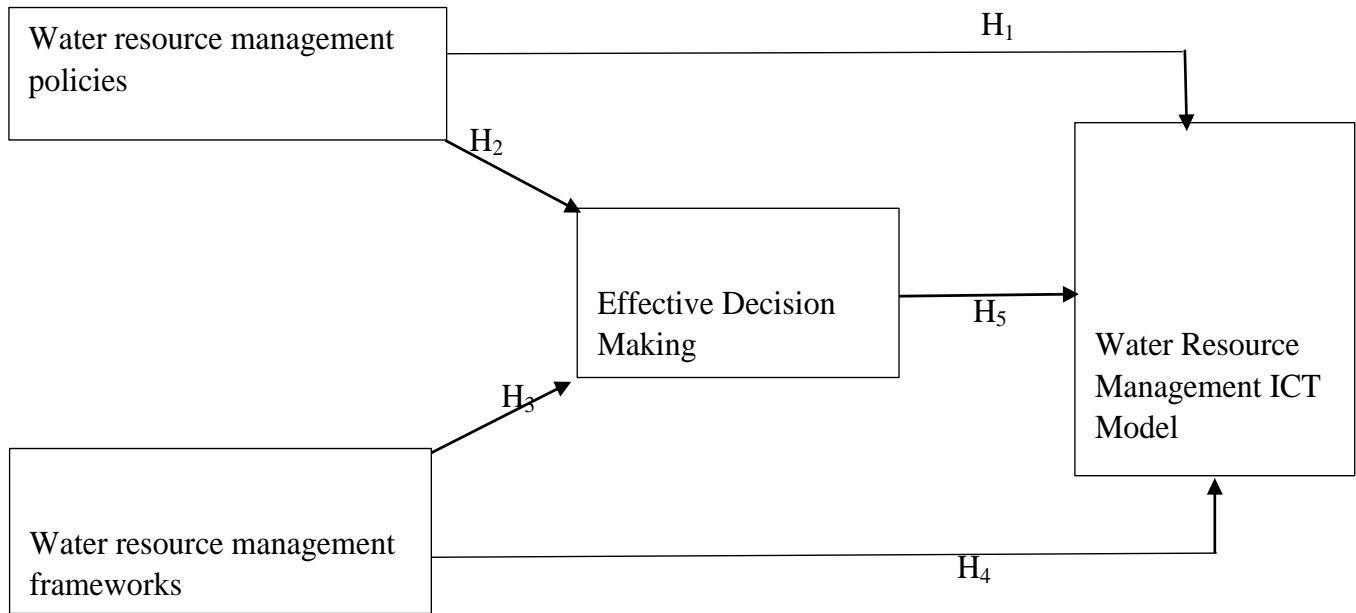


Figure 1. Conceptual model.

management policies are significant and positively related to effective decision making. Hypothesis 3 (H_3): Water resource management frameworks are significant and positively related to effective decision making. Hypothesis 4 (H_4): Water resource management frameworks are significant and positively related to Water Resource Management ICT Model. Hypothesis 5 (H_5): Effective decision making is significant and positively related to water resource management ICT Model. The format of the Figure 1, was adapted from Shahid et al. (2018).

Data collection

The data collection procedures involved three important steps. In the first step, we obtained the preliminary information through literature review of books, journal and conference materials. We then conducted a pilot study to gain a better insight and completeness to help modify the questionnaire. To ensure that we get rid of all the errors, we carried out different screening to check whether the data had problems of missing values, outliers and non-normality. This helped us to correct the problems in the data, so as to proceed with further process. The problem of missing values, outliers and non-normality were totally corrected.

Finally, we conducted a questionnaire survey to obtain the perception of respondents. Data collection was done in Buikwe, Jinja, Mukono, Kampala and Wakiso districts in Uganda. The above districts were chosen because they heavily depend on LVB for their livelihood but at the same time so much affected by decline in water resources due to harsh climatic condition that resulted from human activities. Key stakeholders that were engaged in this study included employees from: Lake Victoria Basin Commission, Lake Victoria Fishery Organization, District Water Officers, District Environment Officers, District Forestry Officers, National Environment Management Authority, Ministry of Water and Environment, National and Regional policy making and communication organs, Kakira Sugar Works, National Water and Sewerage Corporation and Key Community Leaders. To calculate the sample size, Slovin's formulae was used.

$$n = \frac{N}{1 + Ne^2}$$

where n is the sample size, N is the population size and e is the error margin. Population size of 245 was used with a degree of confidence 95% and error margin of 5%, generating a sample size of 152.

The questionnaire comprised of two sections. Section one consist of the respondents' personal information and section two was categorized into four groups in accordance with the nature of the factors/constructs: Water resource management ICT Model, water resource management policies (strategies and frameworks), water resource management frameworks and effective decision making. The survey method was adopted to test the hypotheses proposed in this study. The questionnaires were self-administered to different stakeholders having experience of more than 5 years in water sectors including executives, managers, water engineers and IT officers. During this four months of data collection, valuable opinions from experts were incorporated in the model.

Data analysis

The hypothesized structural model in Figure 1 was analyzed using structural equation modelling -Smart-Partial Least Square (PLS-SEM) version 3. SEM has got many advantages as compared to other hierarchical regression approach to mediational analyses. First: SEM offers a better statistical tool to investigate latent variables with multiple indicators. Second: There are high chances of avoiding measurement errors in the model when examining relationships among variables. This helped in controlling complications from measurement errors and under estimation of mediation effect. Third: SEM approach helps in reducing complication of the model especially in a situation where more than one mediator and dependent variable are simultaneously being considered. Fourth: SEM sets a clear procedure that helps to ensure that all relevant paths are included and tested in the model

Table 1. Reliability and validity values.

Variable	Composite reliability	Average variance extracted
Water Resource Management ICT Model	0.887	0.761
Water Resource Management Policies	0.850	0.740
Water Resource Management Frameworks	0.818	0.695
Effective Decision Making	0.831	0.714

(Cheung, 2008). The capability of evaluating several latent constructs with various manifest variables and also being the best technique for multivariate analysis makes a smart-PLS more preferable in statistical analysis. Since our sample size was less than 200 respondents, we decided to adopt the use of smart-PLS that has capacity to analyze data of smaller sample size as compared to other SEM software like Amos that requires sample size of 200 respondents and above. Smart-PLS is commonly applied in regression models, covariance models, correlation model, path analysis and confirmatory factor analysis (Shahid et al., 2018). In this study, the sample size was 152 and therefore justifies the use of Smart-PLS. Smart-PLS has a two-step procedure that involves the evaluation of the outer measurement model and evaluation of the inner structural model (Henseler et al., 2009).

RESULTS AND DISCUSSION

Model testing

Reliability

Reliability refers to an assessment of degree of consistency which corresponds to the same measurements of at least two different people (Hair et al., 2011). It involves measuring internal consistency which looks at the consistency among variables. The objective of the reliability test is to ensure that the responses are not too different over a period of time. The latent indicators should be measuring the constructs with high correlation for a good internal consistency. The measurement of internal consistency using Cronbach (1951) indicates that the reliability of about 0.70 and above is acceptable (Nunnally and Bernstein, 1994). The observed variables with an outer loading and a composite reliability of at least 0.708 are acceptable and should therefore be retained, while those with values less than 0.708 should be dropped (Shahid et al., 2018). However, indicators with weaker outer loadings are sometimes retained on the basis of their contribution to the content validity. As shown in the Table 1, the values of composite reliability of all variables ranges between 0.818 and 0.887 which are greater than 0.70, hence confirmed the degree of consistency which correspond to the reliability of the variables in the measurements of water resource management ICT model. Composite Reliability (CR) values should be at least 0.7 to be used for internal consistency evaluation in the construct reliability.

Validity

After the reliability test, validity test needs to be carried out. Validity is the extent to which measurement values accurately represent the empirical concept. It is the degree to which a measurement accurately represents what it is supposed to be (Hair et al., 2011). Validity measures the constructs which came out of the formulated concept of the study (Hair et al., 2010). To establish a convergent validity on the construct, average variance extracted (AVE) was used (Henseler et al., 2009). It is the grand mean value of the squared loadings of the indicators associated with the construct. It is computed as the sum of the squared loadings divided by the number of indicators. AVE value of at least 0.50 shows that the construct explains more than half of the variance of its indicators and should be accepted (Hair et al., 2011). The Fornell-Larcker criterion is a very good approach for assessing discriminant validity. The square root of the AVE of each construct should be higher than its highest correlation with any other constructs. Relevance of outer weights (T- Value > 1.645).

It compares the square root of AVE values with latent variable correlations. The square root of each construct's AVE should be greater than its highest correlation with any other constructs for the findings to confirm the cross-loadings assessment standards (Shahid et al., 2018). This provides acceptable validation for the discriminant validity of the model. As shown in Table 1, the average variance extracted for all variables ranges between 0.695 and 0.761 which are all greater than 0.50 and the values of composite reliability ranges between 0.818 and 0.887 which are all bigger than 0.7. Hence, it provides acceptable validation for the discriminant validity of the model.

Mediation test

The mediation testing procedures were carried out on hypothesis by introducing the effective decision making as a mediator variable. The bootstrapping approach based on Partial Least Square Structural Equation Modelling was used. This bootstrapping approach ignores the assumptions of sampling distributions and also enables the use of a small sample data (Hair et al., 2011, 2013). Partial Least Square was used for both

Table 2. Unmediated model.

	Beta	Mean	STDEV	T Statistics	P Values
Effective Decision Making → Water Resource Management ICT Model	0.302	0.299	0.086	3.516	0.000
Integrated Water Resource Management Frameworks → Water Resource Management ICT Model	0.209	0.216	0.115	1.815	0.070
Water Resource Management Policies → Water Resource Management ICT Model	0.239	0.236	0.116	2.065	0.039

Table 3. Mediated model.

Mediated model coefficients	Beta	Mean	STDEV	T Statistics	p (Sig.)	Verdict
Effective Decision Making → Water Resource Management ICT Model	0.250	0.254	0.111	2.260	0.024	Significant
Integrated Water Resource Management Frameworks → Effective Decision Making	0.455	0.448	0.072	6.289	0.000	Significant
Integrated Water Resource Management Frameworks → Water Resource Management ICT Model	0.236	0.242	0.112	2.113	0.035	Significant
Water Resource Management Policies → Effective Decision Making	0.345	0.347	0.086	4.015	0.000	Significant
Water Resource Management Policies → Water Resource Management ICT Model	0.298	0.278	0.111	2.690	0.007	Significant
Specific indirect effects	Beta	Mean	STDEV	T Statistics	p (Sig.)	Verdict
Integrated Water Resource Management Frameworks → Effective Decision Making → Water Resource Management ICT Model	0.114	0.114	0.053	2.137	0.033	Significant
Water Resource Management Policies → Effective Decision Making → Water Resource Management ICT Model	0.086	0.090	0.049	1.755	0.080	Not Significant

prediction and variance based oriented modeling technique. The procedure for carrying out a mediation testing is two folds. First: Test whether the direct relationship between independent variables and dependent variable without the mediator is significant (Hair et al., 2014). Second: Test the model by introducing the mediator variable to find out whether it is significant.

Unmediated model

The variables used to measure the unmediated model are; water resource management policies, effective decision making and integrated water resource management frameworks. As shown in Figure 2, water resource management policies has ($\beta = 0.239$, $p = 0.039$). P-value being less than 0.05, makes it significant and a better determining factor to influence water resource management ICT model. Consequently, effective decision making has ($\beta = 0.302$, $p = 0.000$), p-values being less than 0.05 makes it significant and positively related to water resource management ICT model. However, integrated water resource management frameworks were also tested. The beta value was 0.209 and p-value was 0.070 ($\beta = 0.209$, $p = 0.070$). Since p-value is greater than 0.05 ($0.070 > 0.05$), it is not significant and thus not a better measure for water resource management ICT model. The three exogenous

latent constructs (water resource management policies, water resource management frameworks and effective decision making) wholesomely explained 39.1% ($R^2 = 0.391$) of the variance in the design of an effective water resource management ICT model.

Mediated model

Figure 3 shows a mediated model. The mediator variable is the effective decision making. The variables that were used to measure mediated model are; water resource management policies, effective decision making and integrated water resource management frameworks. The test result shows that water resource management policies had a path coefficient ($\beta = 0.298$, $p = 0.007$). Since p-value is less than 0.05, it is significant and positively influenced the design of water resource management ICT model. Effective decision making had a path coefficient ($\beta = 0.250$, $p = 0.024$). Since p-value is less than 0.05, it is significant and positively influenced the design of water resource management ICT model. Also, integrated water resource management frameworks ($\beta = 0.236$, $p = 0.035$) having a p-value less than 0.05, it is significant and therefore positively related to the design of the model. Also integrated water resource management framework is significant and positively related to effective decision making ($\beta = 0.455$, $p = 0.000 < 0.05$) and water

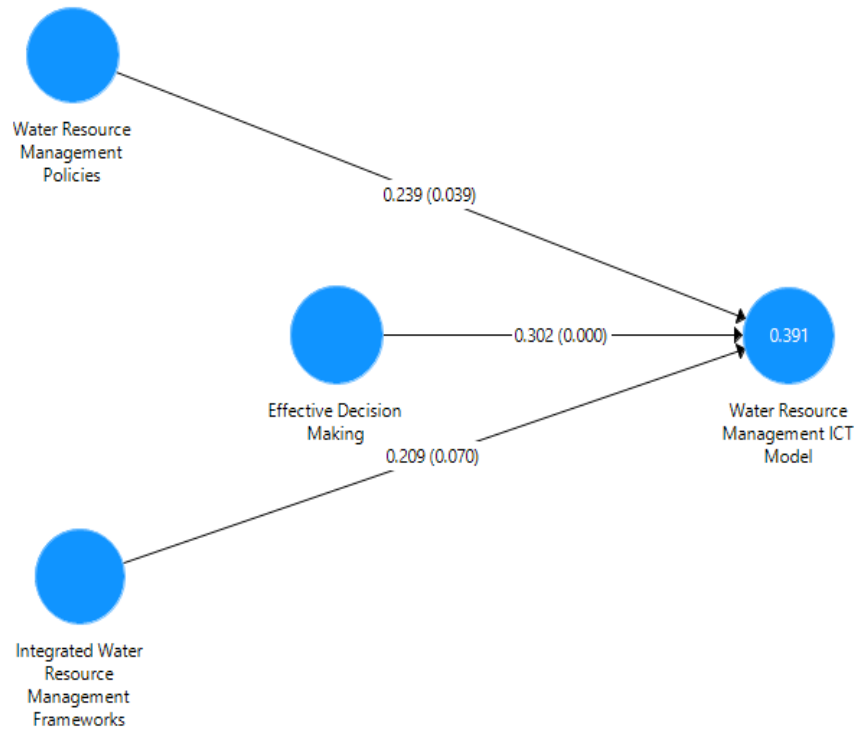


Figure 2. Graphical representation of unmediated model.

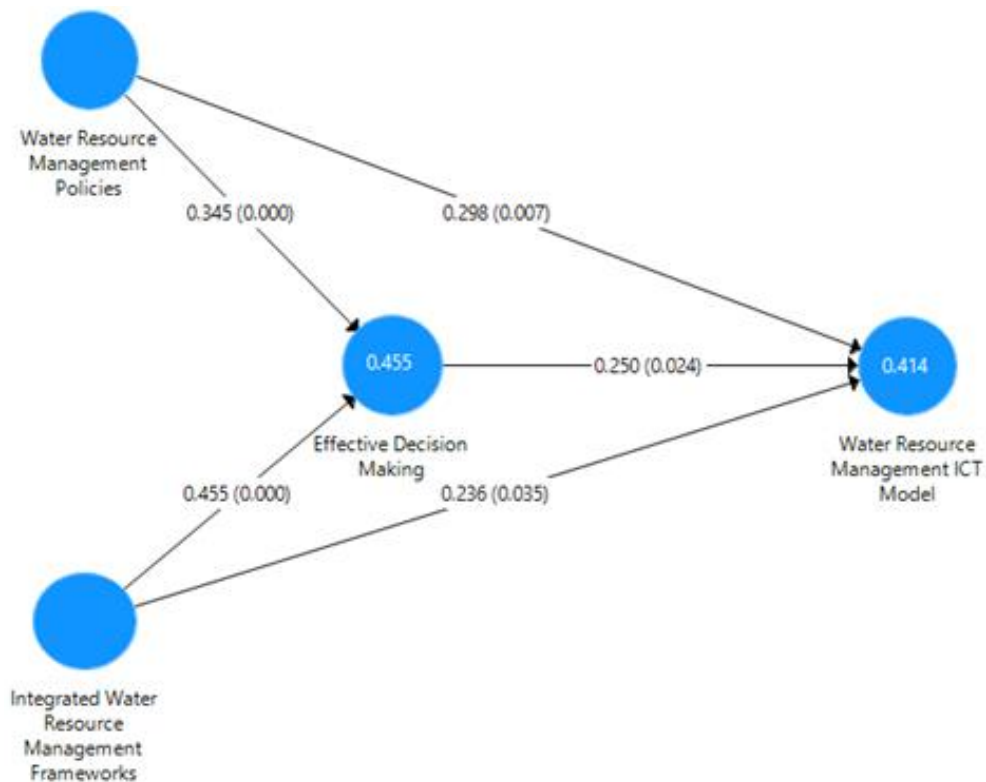


Figure 3. Graphical representation for a mediated model. Mediating effect of the effective decision making on the relationship between water resource management policies and water resource management ICT model.

resource management policies is significant and positively related to effective decision making ($\beta = 0.345$, $p = 0.000 < 0.05$) since all their p-values are less than 0.05.

Table 3 shows the specific indirect effect between water resource management policies and water resource management ICT model by introducing the effective decision making as a mediator variable ($\beta = 0.086$, $p = 0.080$). Since the p-values is greater than 0.05, it shows that introducing the mediator variable has no significant effect on the relationship between water resource management policies and water resource management ICT model.

Mediating effect of the effective decision making on the relationship between water resource management frameworks and water resource management ICT model

The test result shows that specific direct effect on integrated water resource management frameworks is significant and positively influenced water resource management ICT model after the introduction of effective decision making as a mediator variable ($\beta = 0.114$, $p = 0.033$). The two exogenous latent constructs (water resource management policies, water resource management frameworks) and a mediator variable gave rise to $R^2 = 0.414$ which means that they wholesomely explained 41.4% of the variance in the design of water resource management ICT model.

Mediating effect of a mediator variable

In comparison, the two models (unmediated and mediated) have two different values of the variances (R^2) that explained the overall influence of latent variables (exogenous) onto endogenous variables. The value R^2 of unmediated model is 39.1% while R^2 of mediated model is 41.4%. This shows an improvement of 2.3% which implies that there was a positive mediating effect of effective decision making on the two variables (water resource management policies and water resource management frameworks) in measuring a dependent variable called water resource management ICT model.

Goodness-of-fit index (GOF)

Goodness of fit index is a way of verifying that the model sufficiently explains the empirical data (Henseler and Sarstedt, 2013). It is applied as an index for a complete model fit. GOF values should lie between 0 and 1 where 0.1 (small), 0.25 (medium) and 0.36 (large) according to the rating by the global validation of the path model (Shahid et al., 2018). A good model fit shows that a model is plausible. A model fit is calculated by using a geometrical mean value of the average communality (AVE) and the R^2 values. The equation is:

$$GOF = \frac{\sqrt{AVE \times R^2}}{2}$$

From the calculation in Table 4, the GOF index for water resource management ICT model was measured at 0.549 which shows that empirical data fits the model satisfactorily and has a substantial predictive power.

Business benefit

In accordance with the complete analysis of unmediated and mediated model, some of the hypotheses were statistically significant and hence were accepted while others failed the analysis and were rejected. The results of this study support a richer and an accurate picture of how important a mediator variable is, in improving the overall influence of independent variables (exogenous) on the dependent variable (endogenous). It is therefore important to consider effective decision making as a mediator variable in water resource management ICT model for an integrated water resource management of Lake Victoria Basin.

Limitation and constraints of the study

Researchers were not in position to visit all the countries of the East African Community due to logistical constraint.

Conclusion

The key contribution of this study was to apply PLS-SEM to evaluate the mediating effect of the effective decision making on the relationship between water resource management policies, water resource management frameworks and WRM ICT model for an IWRM of LVB. Also, the study aimed to examine the fundamental issues affecting constructs observed by water experts in LVB. The results of the study revealed that water resource management policies, water resource management frameworks and effective decision making are significant and positively related to the design of WRM ICT Model. Also the study shows that WRM policies and WRM frameworks had a significantly positive influence on the effective decision making. The final SEM results revealed that the overall variance R^2 of unmediated variable = 39.1% and R^2 for a mediated model is 41.9% showing an improvement of 2.3% on the variance that explained water resource management ICT model. Therefore, water resource managers should pay more attention on water resource management policies, water resource management frameworks and a mediator variable called effective decision making during the design of water

Table 4. Goodness of fit index calculation.

Variable	Average variance extracted	R ²
Water resource management ICT model	0.761	0.414
Water resource management policies	0.740	
Water resource management frameworks	0.695	
Effective decision making	0.714	
Average values	0.7275	
AVE X R ²	0.3011	
GOF	0.549	

resource management ICT model for an integrated water resource management in Lake Victoria Basin.

Recommendation

The study recommends special attention on water resource management policies and water resource management frameworks when designing water resource management ICT model for an IWRM of LVB. Furthermore, the study recommends introducing a mediator variables in the design of the model since it leads to improvement of the overall variance that positively influence endogenous variable. Lastly, the study recommends an introduction of effective decision making as a mediator variable in the design of WRM ICT model.

Future studies

Future studies may focus on analyzing the factors that may affect utilization of water resource management ICT model for an integrated water resource management of in LVB.

CONFLICT OF INTERESTS

The authors have not declared any conflict of interests.

ACKNOWLEDGEMENT

A lot of appreciation goes to the institutions and key informants in the study areas for cooperating with us and for providing us reliable information necessary for this study. Special thanks to SIDA secretariat, Makerere University and Busitema University for their support.

REFERENCES

Bakibinge-ibembe D J, Said AV, Mungai WN (2011). Environmental laws and policies related to periodic flooding and sedimentation in the

- Lake Victoria Basin of East Africa. *African Journal of Environmental Science and Technology* 5(5):367-380.
- Cheung WG (2008). Testing Mediation and Suppression Effects of Latent Variables. *Organizational Research Methods*. Sage Publication 11(2):296-325.
- Cronbach JL (1951). Coefficient Alpha and the Internal Structure of Tests. *Psychometrik* 16:3.
- Dauglas WJ, Hongtao W, Fengting L (2014). Impacts of population growth and economic development on water quality of a lake: case study of Lake Victoria Kenya water. *Environmental Science and Pollution Research-Springer-Verlag Berlin Heidelberg* 21:5737-5746.
- Hair FJ, Sarstedt M, Hopkins L, Kuppelwieser GV (2014). Partial Least Square Structural Equation Modelling(PLS -SEM).An emmerging tool in Business Research. *European Business Review* 26(2):106-121.
- Hair FJ, Ringle MC, Sarstedt M (2013). Partial Least Square Structural Equation Modelling: Rigorous Application, better results and higher acceptance. *Elsevier* 46:1-12.
- Hair FJ, Sarstedt M, Pierper MT, Ringle MC (2012). The use of Partial Least Squares Structural Equation Modeling in strategic management Research: A review of past practices and recommendations for future applications. *Long Range Planning*, Elsevier 45:320-340.
- Hair JF, Black W, Babin B, Anderson R (2010). *Multivariate Data Analysis*. NewYork: Pearson.
- Hair JF, Ringle C, Sarstedt M (2011). PLS-SEM: Indeed a Silver Bullet. *Marketing Theory and Practice* 19:139-151.
- Henseler J, Ringle C, Sinkovics R (2009). The Use of Partial Least Squares Path Modeling in International Marketing. *Advance in International Marketing* 20:277-319.
- Inter-governmental Panel on Climate Change (IPCC) (2007). *Climate Change : Synthesis Report Summary for Policymakers*. Workgroup contribution to the fourth Assessment Report at IPCC Plenary Valencia, Spain 22:12-17.
- Henseler J, Sarstedt M (2013). Goodness-of-fit indices for partial least squares path modeling. *Springer* 28:565-580.
- Kunjuzwa D, Scholtz B, Fashoro I (2020). Incorporating Indigenous Knowledge within Appropriate Technologies for Promoting Awareness of Water Resource Issues (M. C. and P. Cunningham, ed.). In 2020 IST-Africa week conference (IST-Africa).IEEE. Retrieved from www.IST-Africa.org/Conference2020
- Linuma OF, Tenge AJ (2017). Challenges of Formal Institutions in Water Resources Management in the Lake Victoria Basin. *International Journal of Modern Social Sciences* 6(1)(2169-9917):34-50.
- Mongi HJ, Mvuma AN, Kucel S, Tenge AJ, Gabriel M (2015). Accessibility and utilization of mobile phones for governance of water resources in the Lake Victoria Basin: Constraints and opportunities in Tanzania. *African Journal of Environmental Science and Technology* 9(5):438-450.
- Mongi H, Majule AE, Lyimo JG (2010). Vulnerability and adaptation of rain fed agriculture to climate change and variability in semi-arid Tanzania. *African Journal of Environmental Science and Technology* 4:6.
- Mwangi JG, Ondimu K, Owuor G, Eshiamwata G, Obwoyere G (2014). Factors influencing adoption of sustainable water resource management practices in upper and middle Mara River Basin, Kenya.

- Development and Sustainability 3(6):1326-1339.
- Nsubuga NWF, Namutebi NE, Nsubuga-Ssenfuma M (2014). Water Resources of Uganda: An Assessment and Review. *Journal of Water Resource and Protection* 6(14):18.
- Nunnally JC, Bernstein I (1994). The Assessment of Reliability. *Psychometric Theory* 3:248-292.
- Odongtoo G, Okidi LP, Ssebugwawo D (2019). An integrated Solution for an Integrated Water Resource Management of Lake Victoria Basin. *Annals of Valahia University of Targoviste. Geographical Series* 19(1):11-21.
- Odongtoo G, Ssebugwawo D, Okidi LP (2018). Factors Affecting Communication and Information Sharing for Water Resource Management in Lake Victoria. In *Handbook of Climate Change and Biodiversity*, p. 211.
- Okurut T (2010). Integrated Environmental Protection Approaches: "Strengthening the role of Water Supply Operators in Resource Conservation. 15th International African Water Congress and Exhibition Commonwealth Resort, Munyonyo, Kampala, Uganda.
- Shahid H, Fangwei Z, Ahmed FS, Ali Z, Muhammad SS (2018). Structural Equation Model for Evaluating Factors Affecting Quality of Social Infrastructure Projects. *Open Access Journal of Sustainability* 1415:10.
- United Nations Development Programme (UNDP). (2007). *Human Development Report :Fighting Climate Change, Human Solidarity in a Divided World*. UNDP, New York.

Related Journals:

