

Full Length Research Paper

A miscible CO₂ injection project and evaluation in Daqing, China

Renqing Liu

E and P Institute, Sinopec, Beijing, 100101, China.

Accepted 30 May, 2013

The paper introduces the entire process for carbon (iv) oxide (CO₂) injection in the Fang-48 Group, Daqing Oilfield. A study using experiment and full-field reservoir modeling investigated and optimized the design of a CO₂ miscible flooding project for Fang-48 Group, Daqing. It began with extensive data gathering in the field and building a full-field three-dimensional geologic model. A full field simulation model with relatively coarse gridding was subsequently built and used to history match the depletion and water flood. The focus of the history match is to highlight the remaining oil area. Also, the aim was to form a favorable system for CO₂ injection. A fine-grid CO₂ model was setup after the history match. Both pure CO₂ and water alternating gas (WAG) injection are simulated. In the continuous CO₂ injection, different injection rates were simulated. In the CO₂ WAG injection simulation, different water-gas ratios were investigated. The efficiencies of mobility control of all cases were also analyzed.

Key words: Miscibility, simulation, slimtube, water-alternating-gas.

INTRODUCTION

According to industrial experience, CO₂ injection is an effective enhanced oil recovery (EOR) method for variable conventional reservoir (Gao and Towler, 2010). The injection of CO₂ can be divided into miscible and immiscible, which depends on the properties of the reservoir fluids at reservoir conditions and reservoir characteristics. When the reservoir pressure is lower than the Minimum Miscibility Pressure (MMP), the injectant and crude oil cannot reach miscibility (Holm and Josendal, 1974; Diaz et al., 1996). Conversely, miscible floods happen at the pressure higher than the MMP. Experience showed that miscible displacements obtained better ultimate recoveries than immiscible displacement did (Sharma and Lucille, 1996; Cobanoglu, 2001; Agustssen and Grinestaff, 2004; Gao and Towler, 2012).

Over the last two decades, CO₂ miscible flood has been widely used, especially in the United States (Nestor, 1999; Gao and Towler, 2010). The first CO₂ pilot in 1976, the Western Texas fields in the Permian basin conducted

the first CO₂ miscible flood. Since then, more and more CO₂ miscible projects have been carried out. According to the result of all the successful injections, the CO₂ miscible injections could yield an extra of 5~15% of OOIP in incremental recovery (Crolet and Bonis, 1991; Gao and Towler; 2012).

GEOLOGICAL OVERVIEW

Daqing oil field was discovered in a continental fluvial-delta sedimentary environment and features complex geologic conditions and high permeability contrasts. The Songfangtun is one of the most typical fields in Daqing, China (Gao et al., 2009). Most pilot experiments are carried out in this region. The target reservoir of the flood involved 7 layers of the P I: P I₃, P I₂, P I₂², P I₂¹, P I₁, and P I₁. The sediments of the P I₃ and P I₂ were mainly characterized by the high sinuous

distributary channels. Several of those channels laterally merge into compound meandering belt which has a significant thickness. Some abandoned channels with different directions and sizes remaining at both edges of meandering belt and inside, suggested that the channels were seriously meandered. The fluvial sandstone is the priority in the P I₃ and P I₃² units with high permeability. The P I₂² and P I₂¹ are characterized by low sinuous and relative straight distributary channel. Because of the decay of the hydrodynamic close to the flatten bank, the channels on the delta distributaries plain, frequently branched off or merged so that an anastomosed pattern was formed (Gao et al., 2009).

The widths of single sand bodies showed strong diversity, while compound meandering belt had rarely been seen. Facieses among channel sandstones, interchannel sandstones, and pinch-out zone sandstones showed significant differentiation. Sandstone horizontal distribution presented was pretty complicated. Compared with P I₃ units, the proportion of channel sandstone declined in the P I₂² and P I₂¹, so did the high permeability layers. The P I₂¹, P I₁² and P I₁¹ were characterized by straight underwater distributary channels, and the banded or anastomosed sedimentary framework which was overall formed by narrow band or discontinuous channel sandbody, front thin sandstone and off-sheet reservoirs (Hadlow, 1992; Wang et al., 2006; Feng et al., 2010).

The interest in this simulation was initially spurred by the fact that the water-cut kept increasing and the oil production rate kept decreasing for several years past. The oil production rate in this field began to decline since 1999. And the water cut rose significantly due to the water injection. To slow down the oil production decline, an investigation of enhanced oil recovery has become necessary.

SLIMTUBE MMP MEASUREMENT

A multipoint slimtube test was conducted to measure the MMP. The recovery of oil after 1.2 PV of injection gas plotted versus pressure provides a measure of miscibility, together with the shape of the recovery curve which should have an elbow at a point above 90% oil recovery to indicate the attainment of miscibility. The slim tube itself is a means of forcing the flow to be one-dimensional. So far, there is neither a standard design, nor a standard set of criteria for obtaining MMP's with a slimtube (Asgarpour, 1994; Ali, 2003; Mogensen et al., 2009; Christensen et al., 2001).

Early gas breakthrough with a low slimtube recovery at 1.2 PV injected is normally associated with an immiscible displacement. Displacement behavior that is usually associated with channeling or bypassing in a porous medium can also apply in a slimtube. The diameter design is typically related to the viscous fingering. Viscous fingers in the tube are suppressed by transverse

dispersion if the tube is small enough in diameter and the displacement rate is low. The internal diameter used in this measurement is 0.46 cm. By making the slimtube long, the relative length of any viscous fingering region is kept small in comparison to the scale of the tube length. Smaller diameter tubing is also justified to reduce the impact of lateral viscous fingering. There is no sharp distinction between miscible and immiscible gas flow as far as mass transfer effects are concerned. Component exchange between the phases still takes place at pressures below the MMP (Bachu et al., 2004; Gao et al., 2012).

Porosity has been discussed as a screening parameter for a slimtube, because poor slimtube performance has been associated with higher porosity slimtubes in the past. However, porosity is only a qualitative indicator; and no correlation exists to establish a maximum porosity limit for an acceptable slimtube experiment. In the measurement of Fang oil/ CO₂ MMP, 5 pressure points were measured in total. The result indicates the MMP in Fang-48 as 23.2 MPa.

SIMULATION INVESTIGATION

Fundamental modeling

The research mainly covered the history match, analysis of the current injection and production system, and the estimation of different EOR methods. The simulation model was based on the properties of the Fang-48 Field. A 50 by 60 grid model consisting of three layers was defined to describe the reservoir. A total of 30 wells were involved in the simulation.

History match

The depletion stage was from 1976 to 1979. Seven production wells were drilled during this stage. The main mechanism has been shown to be solution gas drive, in conjunction with fluid expansion and gravity drainage. By analyzing the geological data and the development history, the edge water drive also played an important role, especially in slowing the pressure drop. The invading aquifer, which intruded into the southwest corner of the reservoir, resulted in an imbalance of the reservoir pressure, thus, an imbalance of the production and water cut. At the end of this stage, the average individual water cut in the northeastern zone was less than 5%, while the southwestern part was roughly 65%.

The water flood began in 1979. The oil production rate was increased by 60%. During the water flood, the imbalance of pressure and a low sweep volume factor also existed. The recovery factor was 36.13% at the end of the history match of the primary and secondary phases. According to the outcomes of the simulations,

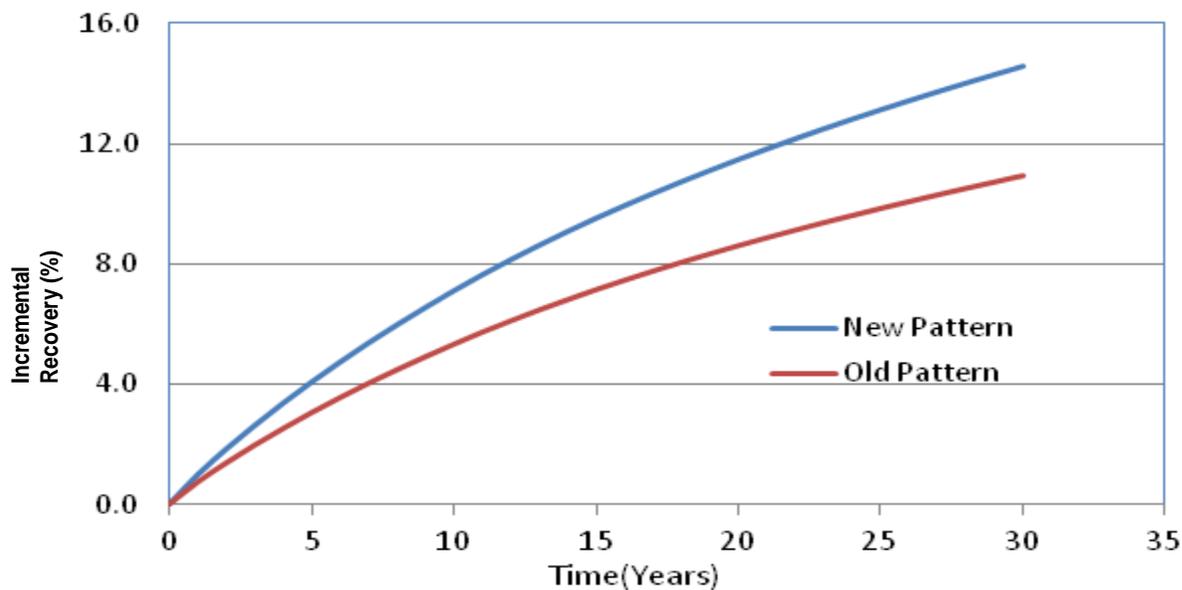


Figure 1. Incremental recoveries for different networks.

only some of the producers responded to the injected water. Others were still dominated by the solution gas drive. Some un-swept areas were left, especially the northern part of the reservoir which hasn't been swept well by the water flood. There were two factors which formed the rich zone of the remaining oil in the central reservoir:

- (1) The unevenness of production and injection,
- (2) The heterogeneous nature of the reservoir. There is also a blind side on the boundary of the reservoir where it is difficult to form a circulation of the reservoir fluids in a closed region.

Development adjustment

A robust network pattern is fundamental to a successful water flood. As analyzed above, the existing well pattern was imperfect. To improve the sweep efficiency and to raise the recovery, a pattern adjustment was necessary. Based on the outcomes of the history match, three new injectors were assigned to the rich remaining oil zone. Meanwhile, to minimize the imbalance of the reservoir pressure, three producers were converted to injectors. The new pattern has 6 injectors and 7 producers (some producers were shut in during the water flood).

Result: By contrasting the oil saturation with different well patterns, the adjustment has improved the flood efficiency significantly. The un-swept areas were mobilized gradually. The number of responding producers increased. As shown in Figure 1, the incremental recovery of the new well pattern is much higher than

that of the old one. When the water cut reaches 97%, the adjusted pattern has an incremental recovery of 4.1% (Zhao et al., 2010).

Field scale simulation

A field scale CO₂ model integrated results was built from the previous water-flood and MMP test to design a model that would provide high confidence results. The full-field CO₂ model proved to be useful for project design and optimization. Each individual case could be evaluated for CO₂ flood potential. Total field production and gas plant operations could also be modeled. A 20-year prediction was run for all cases. In all CO₂ injection cases, the injection scheme was fixed with 6 injection wells and 7 production wells.

Continuous CO₂ miscible injection (CMI)

Under the injectivity limits of the reservoir and above the minimum miscibility pressure, three injection rates were tested to determine the impact of injection rates on development efficiency in the previous research. The recovery results of those three rates show no significant difference. The continuous CO₂ injection is reinvestigated in the refined model and the basic injection rate is used for the reference case of the following water alternating gas (WAG) analysis.

Recovery factor and override observation

Because of the existence of vertical permeability and

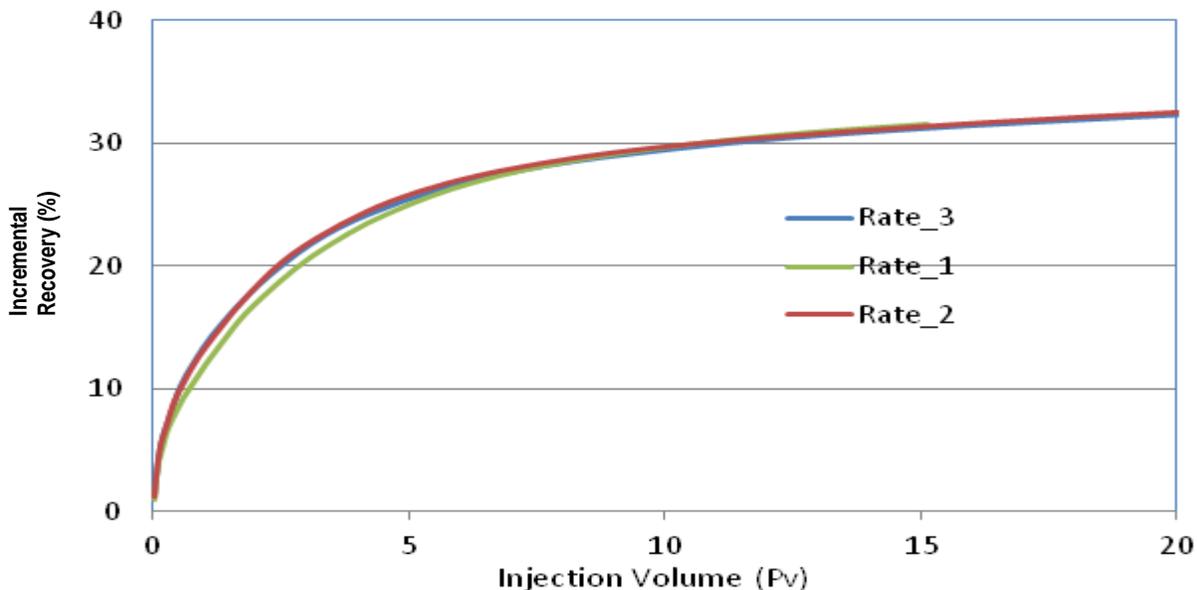


Figure 2. Incremental recoveries from CO₂ flood for different injection rates.

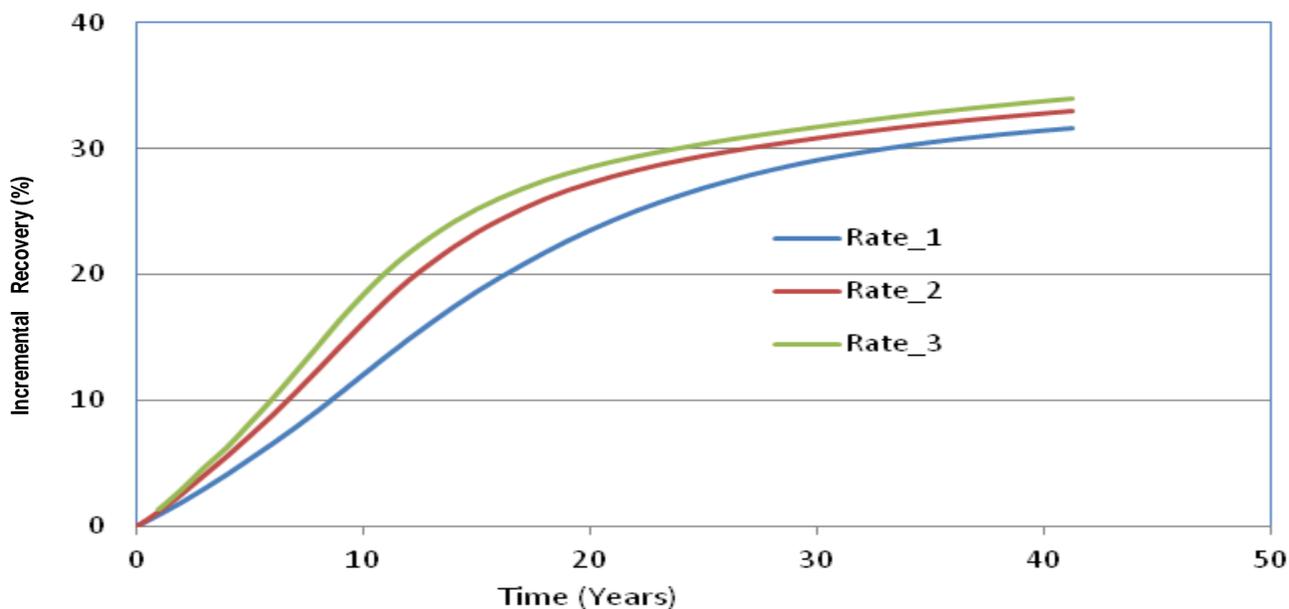


Figure 3. Incremental oil recovery from CO₂ flood.

gravity difference, the override can be significant. In this case the injected gas went preferentially through the upper layer due to the gravity of CO₂ being lower than the crude oil. Correspondingly, there was more gas to mobilize the crude oil in the top layer; the sweep efficiency and displacement efficiency in the top zone was shown to be much better than the lower zone. Comparing three injection rates, the prediction results showed the highest injection rate had the lowest override

effect. In other words, controlling injection rate would reduce the effect of the override, in a sense.

Oil recovery vs. injection PV is shown in Figure 2. Increasing the injection rate by 20% (rate 2), or by 40% (rate 3), the change of injection rate impacted the recovery factor only slightly; however, it speed up the oil recovery rate dramatically, as seen in Figure 3. Meanwhile, the peak oil production rate increased respectively, but the timing of the peak oil production rate

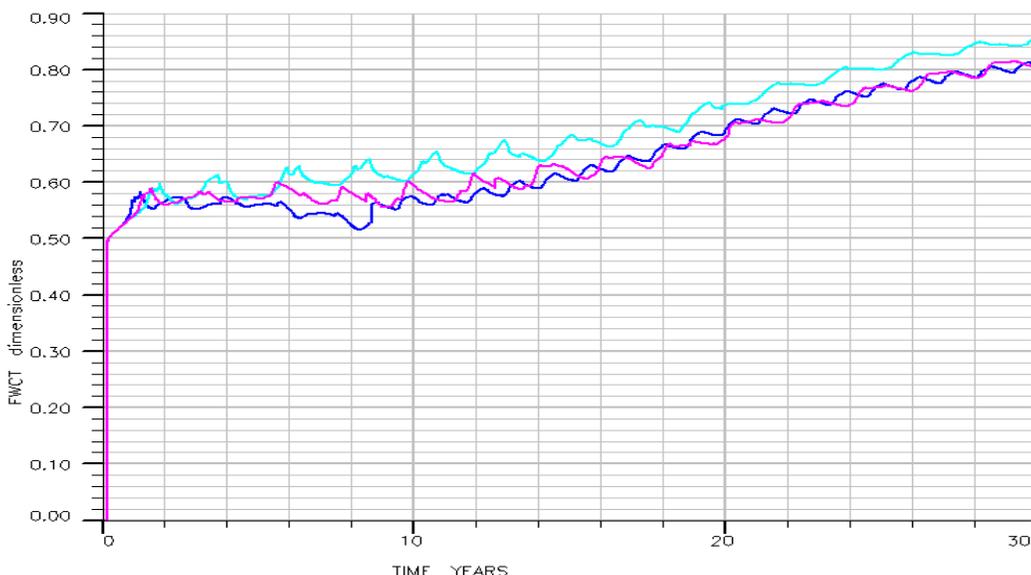


Figure 4. Water cut tendencies of WAG injections for 0.3 HCPV.

did not change. Since the contribution to the oil recovery factor was not significant by increasing injection, CO₂ usage efficiencies for different inject rates were almost the same.

Application concerns and discussion

As discussed above, the continuous injection can contribute a significant incremental recovery. But the override made the vertical recoveries different. The development efficiency in the lower zone was reduced due to the flood disadvantage which was caused by the gravity difference and vertical permeability. The fingering became weak with the injection continuing, the sweep efficiency showed significant improvement; but the displacement efficiencies in the relatively-low-perm zones were still low. All CO₂ floods displayed low displacement efficiency basically because the viscosity of the injectant was much lower than that of the crude oil. The mobility was unfavorable for the flood. For CO₂ flooding, the vertical sweep efficiency was relatively low due to the density difference between the injectant and crude oil. Although the dispersion of the injected CO₂ had the contact between the displacing phase and displaced phase volumetrically increased, the unfavorable mobility ratio resulted in the relatively low displacement efficiency.

Water alternating CO₂ miscible flood WAG

Based on the significant CO₂ flooding potential shown above, a further research was conducted. In order to minimize the above two adversities, a water alternating

CO₂ injection WAG process was designed. To evaluate the performance of miscible CO₂ flooding, extensive computations were conducted. WAG ratio and slug size were principally investigated. The slug sizes covered 0.1 HCPV, 0.3 HCPV, and 0.5 HCPV. WAG ratios involved 2:1, 1:1, and 1:2. So, there were 9 cases in total and a hysteresis model was employed in the WAG simulation.

Flooding efficiency

According to the analysis of WAG prediction, the flooding efficiency is getting better with the increase of the CO₂ proportion. Taking 0.3 HCPV CO₂ injections as an example, when the WAG ratio is 2:1, the incremental recovery factor is 5.4%. Decreasing the WAG ratio to 1:2, the incremental recovery factor goes up to 9.46%. Figures 4 and 5 show the water cut and incremental recovery change for 0.3 HCPV CO₂ injections. All predictions of three slug sizes show that the recovery efficiency depends on the CO₂ injection volume in the Fang-48 field. Although WAG as the solution of heterogeneity and gravity segregation improved the sweep efficiency, there is no contribution to the ultimate recovery. Analyzing the oil saturation maps, the WAG injection has a better sweep efficiency compared with CMI. But the residual oil saturation is relatively high. The flooding efficiency presented by ultimate recovery is lower in WAG process.

CONCLUSION

Detailed modeling of the remaining oil after water flooding

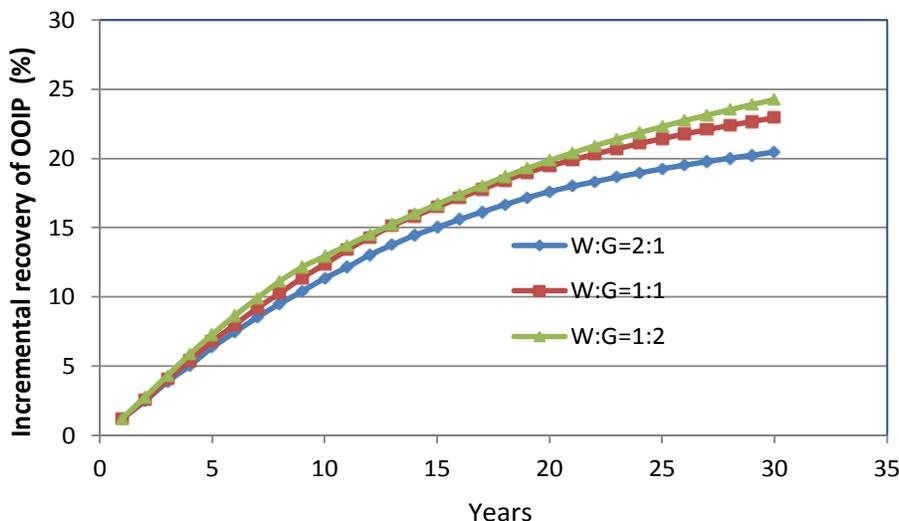


Figure 5. Incremental recovery of OOIP for 0.3 HCPV CO₂ injection.

improved the understanding of the enhanced oil recovery potential. The MMP tests showed that it is easy to obtain miscibility with the Fang-48 oil at reservoir conditions. Full-field simulation of the CO₂ injection offered valuable reference in the estimation of feasibility and efficiency of CO₂ EOR in the Fang-48. The simulation results of field scale continuous injections indicate that the miscible flood has a significant potential in the Fang-48 reservoir. Relevant to the thickness and heterogeneity of the Fang-48 reservoir, the continuous injection results in a slight override and viscous fingering in the simulation model due to the density and viscosity weaknesses of CO₂. The WAG injection improved the above problems. The comparison of ultimate recoveries indicated that although the sweep efficiency is improved with WAG injection, the flooding efficiency of continuous injection is still better than that of WAG.

REFERENCES

- Agustssen H, Grinestaff GH (2004). A Study of IOR by CO₂ Injection in the Gullfaks Field, Offshore Norway. SPE Paper 89338, presented at the 2004 SPE/DOE 14th Symposium on Improved Oil Recovery held in Tulsa, Oklahoma, USA, 17-21 April.
- Ali SMF (2003). The Unfulfilled Promise of EOR. The 24th Annual Workshop and Seminar of the IEA Collaborative Project on EOR, London, 30 September.
- Sharma AK, Lucille EC (1996). "From Simulator to Field Management: Optimum WAG Application in a West Texas CO₂ Flood—A Case History", SPE 36711, 1996, SPE Annual Conference and Exhibition, Denver, Colorado.
- Asgarpour S (1994). An Overview of Miscible Flooding, CJPT, 33:13-15.
- Bachu S, Shaw JC, Pearson RM (2004). Estimation of Oil Recovery and CO₂ Storage Capacity in CO₂ EOR Incorporating the Effect of Underlying Aquifers. SPE Paper 89340, presented at the 2004 SPE/DOE 14th Symposium on Improved Oil Recovery held in Tulsa, Oklahoma, USA, 17-21 April.
- Christensen JR, Stenby EH, Skauge A (2001). Review of WAG Field Experience. SPE Paper 71203, published in SPE Reservoir Evaluation and Engineering, April. pp.1982-1988.
- Cobanoglu M (2001). "A Numerical Study To Evaluate The Use Of WAG As An EOR Method For Oil", SPE 72127, 2001 SPE Asia Pacific Improved Oil Recovery Conference, Kuala Lumpur, Malaysia.
- Crolet JL, Bonis MR (1991). Prediction of the Risks of CO₂ Corrosion in Oil and Gas Wells. SPE Paper 20835, SPEPE, November. pp. 795-802
- Diaz D, Bassiuni Z, Kimbrell W, Wolcott J (1996). Screening Criteria for Application of Carbon Dioxide Miscible Displacement in Water Flood Reservoirs Containing Light Oil. SPE Paper 35431, presented at the SPE/DOE Improved Oil Recovery Symposium, Tulsa, OK, April. pp. 21-24
- Feng Y, Ji B, Gao P (2010). "An Improved Grey Relation Analysis Method and Its Application in Dynamic Description for a Polymer Flooding Pilot of Xingshugang Field, Daqing," SPE 128510, presented at the North Africa Technical Conference and Exhibition, 14-17 February 2010, Cairo, Egypt.
- Gao P, Feng Y, Zhang X, Luo F (2009). "Investigation of Cyclic Water Injection after Polymer Flood in Xing4-6 Field, Daqing", SPE-126836, presented at the 2009 Kuwait International Petroleum Conference & Exhibition 14-16 December 2009 in Hilton Kuwait Resort, Kuwait.
- Gao P, Towler B (2010). "Strategies for Evaluation of the CO₂ Miscible Flooding Process", SPE-138786, presented at the 2010 Abu Dhabi International Petroleum Exhibition and Conference to be held 1-4 November 2010 in Abu Dhabi, UAE.
- Gao P, Towler B (2012). "Integrated Investigation of Enhanced Oil Recovery in South Slattery Minnelusa Reservoir, Part 2: CO₂ Miscible Injection", J. Petroleum Science and Technology. pp. 2543-2551.
- Hadlow RE (1992). Update of Industry Experience with CO₂ Injection. SPE Paper 24928, presented at the 67th Annual Technical Conference and Exhibition of the Society of Petroleum Engineers held in Washington, DC, 4-7 October.
- Holm LW, Josendal VA (1974). Mechanisms of Oil Displacement by Carbon Dioxide. JPT, December 1427-1438 IEA Report a (1993) Carbon Dioxide Capture from Power. pp. 178-195.
- Nestor L (1999). "Management of Water Alternating Gas (WAG) Injection Projects", SPE 53714, 1999 SPE Latin American and Caribbean Petroleum Engineering Conference, Caracas, Venezuela.
- Wang W, Pu H, Yin D, Gao P (2006). "The Study on Reasonable Infilling Method for Low Permeability Reservoir," Small Hydrocarbon Reservoirs, 12(2):298-310.
- Zhao X, Wu Y, Gao P (2010). "Investigation of Steam Injection at Critical Condition and a Pilot Test in 119-152, Chao-601," SPE 130968, presented at the 2010 international Oil and Gas Conference and Exhibition in China, 8-10 June 2010, Beijing, China.