Vol. 13(20), pp. 265-272, 30 December, 2018

DOI: 10.5897/IJPS2018.4763 Article Number: 3509A7659615

ISSN: 1992-1950 Copyright ©2018

Author(s) retain the copyright of this article http://www.academicjournals.org/IJPS



International Journal of Physical Sciences

Full Length Research Paper

Assessment of outdoor radiation levels and radiological health hazards in Emene Industrial Layout of Enugu State, Nigeria

Ugbede F. O.1* and Benson I. D.2

¹Radiation and Health Biophysics, Department of Physics with Electronics, Evangel University Akaeze, Ebonyi State, Nigeria.

²Department of Mathematics and Computer Science, Godfrey Okoye University, Enugu State, Nigeria.

Received 3 September, 2018; Accepted 3 December, 2018

A study to assess the outdoor Background Ionizing Radiation (BIR) levels in Emene Industrial Layout of Enugu State, Nigeria has been conducted. An in-situ measurement of BIR exposure rate in mRh 1 for 30 locations was done using a well calibrated portable GQ GMC-320 PLUS nuclear radiation detector at an elevation of 1.0 m above ground level with a geographical positioning system (GPS) for geographical location. The measured BIR exposure rates were used to evaluate the radiological health hazards and radiation effective doses to different body organs using well established radiological relations. The obtained values were compared with recommended permissible limits to ascertain the radiological health status of the environment. The mean values of BIR exposure levels (0.015±0.001 mRh⁻¹), absorbed dose rates (126.15±5.10 ηGyh⁻¹) and excess lifetime cancer risk (0.541±0.032×10⁻³) are higher than their recommended safe limits of 0.013 mRh⁻¹, 84.0 ηGyh⁻¹, 0.29×10⁻³ respectively as recommended by ICRP and UNSCEAR. The mean annual effective dose equivalent (0.155±0.006 mSvy¹) is within recommended permissible limits of 1.00 mSvy⁻¹ for general public exposure. Also, the effective doses to different body organs are all below the recommended limits of 1.0 mSvy⁻¹. Generally, the study shows that Emene Industrial Layout is radiologically contaminated due to industrial activities taking place. However, the contamination does not constitute any immediate radiological health effect on resident of the area but there is the potential for long-term health hazards in the future such as cancer due to accumulated doses.

Key words: BIR exposure level, effective dose, industrial activities, Emene Industrial Layout.

INTRODUCTION

The advent of industrialization coupled with poor environmental management systems have resulted to the release of various forms of toxic, corrosive and radioactive contaminants or pollutants into the

environment. The negative health impact of industrial activities in the environment has been an issue of discussion in contemporary times. Environmental contamination and degradation is a global concern

*Corresponding author. E-mail: oghene4fred@yahoo.com; ugbedefred@evangeluniversity.edu.ng. Tel: +2348064148555.

Author(s) agree that this article remain permanently open access under the terms of the <u>Creative Commons Attribution</u> License 4.0 International License

because of its negative health impact. Background ionization radiation (BIR) could be considered as environmental contamination especially when it exceeds safe occupational and public limits (Agbalagba et al., 2016). BIR in the environment which was originally due to natural sources of terrestrial primordial radionuclides and extraterrestrial cosmic rays has over the years increased due to human activities and especially in the industrial environments. This is because raw materials used in industries contain naturally occurring radioactive materials (NORM) (Ademola and Olatunji, 2013) which are later released into the environment as waste after undergoing some industrial processes. Enhanced levels of naturally occurring radionuclides may be associated with certain natural materials, minerals and other resources used as raw materials in industries due to their region and origin (Lu and Zhang, 2006; Ademola and Olatunji, 2013). The most important are the series ²³⁸U and ²³²Th and their decay products as well as non series ⁴⁰K. Exploitation of these resources for the production of consumer items may lead to further enhancement of the radioactivity at concentrations above normal which are redistributed and released into the environment. The end result of this is increased BIR levels. This, in effect exposes the populace to high radiation doses and hazards.

Research data available on BIR levels assessment in some cities and towns worldwide show regions of low and high BIR levels. In Nigeria for example, Agbalagba et al. (2016) reported high radiation levels within Ughelli metropolis and its environs due to the industrial nature of the area. Agbalagba (2017) documented mean BIR exposure value of 0.022±0.006 mRh⁻¹ in industrial zone of Warri city. James et al. (2013) studied the radiation levels of Idu industrial area of Abuja and recorded low radiation doses in the area. Akpabio et al. (2005) also studied the environmental radioactive levels in Ikot-Ekpene and reported that the radioactivity levels in the area is generally low ranging. Within Keffi and Akwanga towns of central Nigeria, Termizi-Ramli et al. (2014) also reported low radiation levels that are recommended safe limits for the areas. Outside the country, Zarghani and Jafari (2017) recorded low range radiation doses in Birjand, Iran. In Chihuahua City, Mexico, Luevano-Gurrola et al. (2015) observed high outdoor gamma dose rates ranging from 113 to 310 nGyh⁻¹.

High radiation levels and doses are detrimental to human health. Ionizing radiation are highly energetic particles with high penetrating power. When such radiation passes through a biological cell, it causes both excitation and ionization thereby altering the cells structure (Emelue et al., 2014). Exposure to high levels of gamma radiation causes a number of harmful effects in man such as mutation and cancer of various types (Aziz et al., 2014) and different kinds of diseases (Taskin et al., 2009). The practice of radiation protection has ensured

that human exposure to radiation be kept to as low as reasonably achievable, called the ALARA principle (ICRP, 1973). One of the roles of radiation protection bodies is to ensure that the exposure of the public does not exceed certain safe limits as set up from time to time by regulatory agencies (Mokobia and Oyibo, 2017). Baseline data about BIR levels in Emene Industrial Layout (EIL) has not been established. Firstly, this study is aimed to report BIR exposure levels for the area and to assessing the impact of the industrial activities on BIR levels in the environment. The related radiological health indices are evaluated to know the health status of the environment.

MATERIALS AND METHODS

Study area

The study area, Emene Industrial Layout is located in Enugu East Local Government Area of Enugu State, South Eastern Nigerian. Thirty sampling points were carefully marked out for BIR exposure measurement which evenly covers the locations of the various industries/factories in the study area. Each of the sampling point was assigned a code (EIL1 to EIL30) for easy referencing. The nature of activities in the study area includes but not limited to the following; petroleum storage facilities, aluminum roofing sheet manufacturing, palm kernel oil extraction and processing, gas cylinders fabrication, gas storage and dispensing facilities, asphalt processing, saw mill, floor mill, plastic processing and production, metal fabrication/welding, automobile workshops and assembly plant, blocks/brick production, construction equipment yard, cement warehouses, asbestos production, oxygen and acetylene gases production, paint factory, etc.

Sampling and measurement

Measurement of terrestrial outdoor BIR exposure levels was done using a portable factory calibrated GQ GMC-320 PLUS nuclear radiation detector (from GQ Electronics LLC, USA). The radiation meter contains a Geiger-Muller detector tube capable of detecting $\alpha,\,\beta,\,\gamma$ and x-rays which was pre-set to detect background gamma radiation. The detector has a gamma energy range of 0.1 to 1.25 MeV and sensitivity of 0.1 \sim 1 MeV. When radiation passes through the Geiger tube, it triggers an electrical pulse for the CPU to register as a count in the basic count rate unit of Count per Minute (CPM). The CPM count rate indicates the radiation level and it can be converted to other traditional radiation units, such as mRh $^{-1}$ or μSvh^{-1} . The working voltage of the detector is 3.6 to 3.7 V with power consumption rate of 25 to 125 mW dependent on the count rate.

The radiation level assessment was conducted for five months; from January to May 2018, with three BIR exposure readings taken for each sampling points at an interval of four minutes per month. This was done to account for any variation in the environmental parameters due to seasonal conditions (dry and wet seasons) and also to account for the fluctuating nature of radiation. The count rate per minute recorded in the detector was converted to radiation exposure in mRh⁻¹ with an inbuilt converter according to Equation 1. A total of 15 measurements for each sample point were taken for the five months and the average recorded in this report as mean exposure readings. Readings were taken between the hours of 1300 and 1600 because the radiation meter has a maximum response to radiation within these hours as recommended by the

Table 1. BIR exposure levels and related radiological health indices in Emene Industrial Layout.

Sampling point code	Geographical location	Mean exposure reading (mRh ⁻¹)	Absorbed dose (ηGyh ⁻¹)	AEDE (mSvy ⁻¹)	ELCR×10 ⁻³	
EIL1	N6°28'6.04" E7°36'4.76"	0.012	104.40	0.128	0.448	
EIL2	N6°28'10.10" E7°36'10.47"	0.017	147.90	0.181	0.634	
EIL3	N6°27'59.07" E7°35'47.69"	0.009	78.30	0.096	0.336	
EIL4	N6°27'59.14" E7°35'44.74"	0.011	95.70	0.117	0.409	
EIL5	N6°28'1.92" E7°35'58.74"	0.013	113.10	0.139	0.487	
EIL6	N6°27'54.90" E7°35'34.54"	0.012	104.40	0.128	0.448	
EIL7	N6°27'51.01" E7°35'24.69"	0.014	121.80	0.149	0.522	
EIL8	N6°27'52.52" E7°35'25.49"	0.014	121.80	0.149	0.522	
EIL9	N6°27'53.87" E7°35'28.95"	0.016	139.20	0.171	0.599	
EIL10	N6°27'53.72" E7°35'31.56"	0.014	121.80	0.149	0.522	
EIL11	N6°27'55.30" E7°35'40.30"	0.016	139.20	0.171	0.599	
EIL12	N6°27'58.14" E7°35'37.61"	0.015	130.50	0.160	0.560	
EIL13	N6°27'39.26" E7°34'45.88"	0.011	95.70	0.117	0.409	
EIL14	N6°27'33.93" E7°34'42.06"	0.014	121.80	0.149	0.522	
EIL15	N6°27'31.84" E7°34'46.82"	0.015	130.50	0.160	0.560	
EIL16	N6°27'25.76" E7°34'41.86"	0.013	113.10	0.139	0.487	
EIL17	N6°27'21.34" E7°34'52.07"	0.021	182.70	0.224	0.784	
EIL18	N6°27'15.96" E7°34'44.01"	0.012	104.40	0.128	0.448	
EIL19	N6°27'20.71" E7°34'2.25"	0.012	104.40	0.128	0.448	
EIL20	N6°27'14.10" E7°34'4.79"	0.020	174.00	0.213	0.746	
EIL21	N6°27'5.78" E7°34'6.41"	0.020	174.00	0.213	0.746	
EIL22	N6°26'57.98" E7°34'4.82"	0.013	113.10	0.139	0.487	
EIL23	N6°26'51.90" E7°34'6.83"	0.012	104.40	0.128	0.448	
EIL24	N6°27'1.46" E7°34'11.45"	0.012	104.40	0.128	0.448	
EIL25	N6°27'5.06" E7°34'20.53"	0.013	113.10	0.139	0.487	
EIL26	N6°27'4.56" E7°34'27.36"	0.016	139.20	0.171	0.599	
EIL27	N6°27'17.60" E7°33'56.14"	0.021	182.70	0.224	0.784	
EIL28	N6°27'25.16" E7°34'31.43"	0.011	95.70	0.117	0.409	
EIL29	N6°27'33.78" E7°34'36.13"	0.019	165.30	0.203	0.711	
EIL30	N6°27'45.19" E7°35'3.08"	0.017	147.90	0.181	0.634	
Mean value ±SED		0.015±0.001	126.15±5.10	0.155±0.006	0.541±0.032	

National Council on Radiation Protection and Measurements (NCRP, 1993). An *in-situ* approach of measurement with the standard practice of raising the detector tube 1.0 m above ground level with its window facing the point under investigation was adopted to enable sample points maintain their original environmental characteristics (Agbalagba et al., 2016; Ugbede and Echeweozo, 2017). The precise locations of each of the sample point were determined using a geographical positioning system (GPS). The BIR exposure rate obtained were quantitatively used to assess the radiation health impact to the public in the immediate environments and radiation effective doses to different organs of the body by performing a number of radiological health hazard indices calculations using well established mathematical relations.

Count rate per minute (CMP) = 10^{-3} Roentgen × Q.F (1)

where Q.F is the quality factor, which is equal to 1 for external environments.

RESULTS AND DISCUSSION

The results for the BIR exposure level measurements and the related radiological health parameters are given in Table 1. Table 2 shows the results for the effective dose to some body organs. The different radiological health indices used in evaluating the radiation health status of the studied environment are absorbed dose, AEDE and the excess lifetime cancer risk (ELCR).

BIR exposure rate levels

The BIR exposure rate measured ranges from 0.009 to 0.021 mRh⁻¹ with mean value of 0.015±0.001 mRh⁻¹. The mean exposure rate for the studied environment

Table 2. Dose to different organs of the body in Emene Industrial Layout.

Sampling point code	D _{organ} (mSvy ⁻¹)							
	Lungs	Ovaries	Bone marrow	Testes	Kidney	Liver	Whole body	
EIL1	0.082	0.074	0.088	0.105	0.079	0.059	0.087	
EIL2	0.116	0.105	0.125	0.148	0.112	0.083	0.123	
EIL3	0.061	0.056	0.066	0.079	0.060	0.044	0.065	
EIL4	0.075	0.068	0.081	0.096	0.073	0.054	0.080	
EIL5	0.089	0.081	0.096	0.114	0.086	0.064	0.095	
EIL6	0.082	0.074	0.088	0.105	0.079	0.059	0.087	
EIL7	0.095	0.086	0.103	0.122	0.092	0.069	0.101	
EIL8	0.095	0.086	0.103	0.122	0.092	0.069	0.101	
EIL9	0.109	0.099	0.118	0.140	0.106	0.079	0.116	
EIL10	0.095	0.086	0.103	0.122	0.092	0.069	0.101	
EIL11	0.109	0.099	0.118	0.140	0.106	0.079	0.116	
EIL12	0.102	0.093	0.110	0.131	0.099	0.074	0.109	
EIL13	0.075	0.068	0.081	0.096	0.073	0.054	0.080	
EIL14	0.095	0.086	0.103	0.122	0.092	0.069	0.101	
EIL15	0.102	0.093	0.110	0.131	0.099	0.074	0.109	
EIL16	0.089	0.081	0.096	0.114	0.086	0.064	0.095	
EIL17	0.143	0.130	0.155	0.184	0.139	0.103	0.152	
EIL18	0.082	0.074	0.088	0.105	0.079	0.059	0.087	
EIL19	0.082	0.074	0.088	0.105	0.079	0.059	0.087	
EIL20	0.136	0.124	0.147	0.175	0.132	0.098	0.145	
EIL21	0.136	0.124	0.147	0.175	0.132	0.098	0.145	
EIL22	0.089	0.081	0.096	0.114	0.086	0.064	0.095	
EIL23	0.082	0.074	0.088	0.105	0.079	0.059	0.087	
EIL24	0.082	0.074	0.088	0.105	0.079	0.059	0.087	
EIL25	0.089	0.081	0.096	0.114	0.086	0.064	0.095	
EIL26	0.109	0.099	0.118	0.140	0.106	0.079	0.116	
EIL27	0.143	0.130	0.155	0.184	0.139	0.103	0.152	
EIL28	0.075	0.068	0.081	0.096	0.073	0.054	0.080	
EIL29	0.130	0.118	0.140	0.166	0.126	0.094	0.138	
EIL30	0.116	0.105	0.125	0.148	0.112	0.083	0.123	
Mean value	0.099	0.090	0.107	0.127	0.096	0.071	0.105	

exceeded the recommended permissible limit of 0.013 mRh⁻¹ (ICRP, 2007; Osimobi et al., 2015; Agbalagba et al., 2016). The result indicates that 53.3% of the sample points exceeded the permissible BIR level for the general public. The variation and high exposure rate level is attributed to the different industrial activities carried out in the different sampling locations and their geophysical characterization. Petroleum products, chemicals and construction materials like asphalt, granites, cement, etc. have been recognized to contain some radioactive elements (Agbalagba et al., 2016) which enhance BIR level and are well available at the sample locations. The high BIR levels are suggestive indication that the environment is radiologically contaminated and unhealthy for the general public. The fluctuating pattern of the exposure level in comparison with recommended safe limit is shown in Figure 1. The mean exposure level reported here is lower than 0.018±0.004 mRh⁻¹ value observed by Osimobi et al. (2015) in solid mineral mining sites of Enugu State, Nigeria. The mean value is higher than that measured by Ononugbo and Mgbemere (2016) in a fertilizer company in Onne, Rivers State, Nigeria which ranges between 11.73 and 14.95 ηRh⁻¹.

Absorbed dose rate (ADR) in air

The absorbed dose is used to assess the potential for any biochemical changes in specific tissues. It quantifies the radiation energy that might be absorbed by a potentially exposed individual. The measured BIR exposure levels were converted to radiation absorbed dose rate in air using Equation 2 according to Rafique et al. (2014) and Agbalagba (2017).

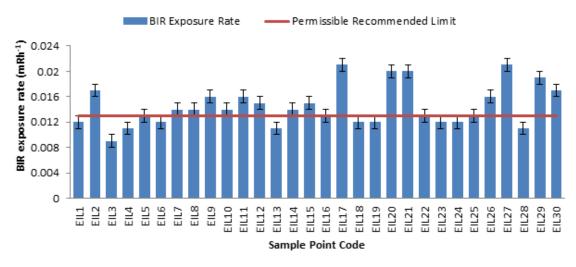


Figure 1. Comparison between BIR exposure rates in Emene Industrial Layout and permissible limit.

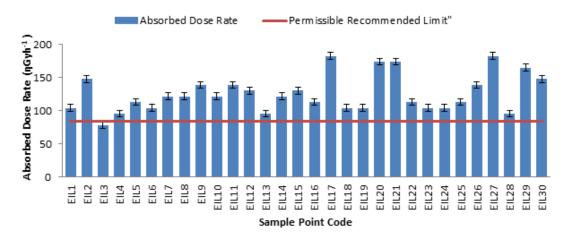


Figure 2. Comparison between the absorbed dose rate in Emene Industrial Layout and permissible safe limit.

$$1\mu Rh^{-1} = 8.7\eta Gyh^{-1} = \frac{8.7 \times 10^{-3}}{(1/8760y)}\mu Gyy^{-1}$$
 (2)

This implies that:

$$1mRh^{-1} = 8.7\eta Gyh^{-1} \times 10^3 = 8700\eta Gyh^{-1}$$
 (3)

The calculated absorbed dose rate ranges between 78.30 and 182.70 ηGyh⁻¹ with observed mean value of 126.15±5.10 ηGyh⁻¹. These dose rates arising from BIR exposure in the studied locations are far higher than the recorded world weighted average of 59.00 ηGyh⁻¹ (Agbalagba, 2017; Monica et al., 2016) and recommended safe limit of 84.0 ηGyh⁻¹ (UNSCEAR, 2008; Ononugbo and Mgbemere, 2016) for outdoor exposure as shown in Figure 2. These dose rates show a

radiation contaminated environment. Though the dose rate at these levels may not constitute any immediate health hazards to the residents of the locality, there is the potential for long-term health hazards in the future due to accumulated doses. The mean dose rate is higher than 97.44±20.42, 124.41±33.21, 97.44±12.17, 99.18±21.78 and 119.19±17.90 ηGyh⁻¹ dose rates earlier reported by Benson and Ugbede (2018) in populated motor packs environment of Enugu city but lower than 141.30±31.31 ηGyh⁻¹ for Warri city in Delta State, Nigeria reported by Agbalagba (2017) and 132.16±24.36 ηGyh⁻¹ for Ughelli metropolis in Delta State Nigeria by Agbalagba et al. (2016).

Annual effective dose equivalent AEDE

The AEDE is used in radiation assessment and

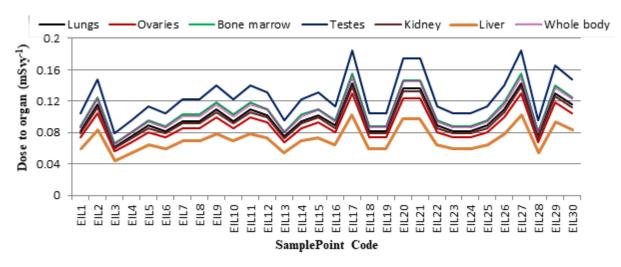


Figure 3. Comparison of the doses to different body organs.

protection to quantify the whole body absorbed dose per year. It is used to assess the potential for long-term effects that might occur in the future. The calculated absorbed dose rates were used to compute the AEDE within the study area using Equation 4 as given by Rafique et al. (2014) and Agbalagba (2017):

$$AEDE(mSvy^{-1}) = ADR(\eta Gyh^{-1}) \times 8760h \times 0.7 Sv/Gy \times 0.2$$
 (4)

where ADR is the absorbed dose rate in ηGyh^{-1} , 8760 is the total hours in a year, 0.7Sv/Gy is the dose conversion factor from absorbed dose in air to the effective dose with an occupancy factor of 0.2 for outdoor exposure as recommended by UNSCEAR (2008).

The calculated values of AEDE range from 0.096 to 0.224 mSvy⁻¹ with mean value of 0.155±0.006 mSvy⁻¹. This mean annual effective dose is higher than world average value of 0.07 mSvy⁻¹ (ICRP, 2007; UNSCEAR, 2008; Agbalagba, 2017) but within ICRP and UNSCEAR recommended permissible limits of 1.00 mSvy⁻¹ for the general public (ICRP, 2007; UNSCEAR, 2008). This implies that the studied location is radiologically contaminated due to the industrial activities taking place in the area. However, the contamination does not constitute any immediate radiological health effect on residents of the area. The annual effective doses evaluated in this study are similar to those reported by Ononugbo and Mgbemere (2016) in fertilizer producing area in Onne River State. The mean value is lower than 0.205±0.017 mean value observed in Idu industrial area of Abuja, Nigeria by James et al. (2013).

Effective dose to different body organs (D_{organ})

The effective dose to organs (D_{organ}) estimates the amount of radiation dose intake to various body organs

and tissues. The D_{organ} of the body due to inhalation was calculated using Equation 5 as given by Darwish et al. (2015).

$$D_{organ}(mSvy^{-1}) = AEDE \times F \tag{5}$$

where *F* is the conversion factor of organ dose from air dose. The F value for lungs, ovaries, bone marrow, testes, kidney, liver and whole body as given by ICRP (1996) are 0.64, 0.58, 0.69, 0.82, 0.62, 0.46, and 0.68, respectively

The estimated average D_{organ} values for the lungs, ovaries, bone marrow, testes, kidney, liver and whole body due to radiation exposure and inhalation in the Emene industrial environment are 0.099, 0.090, 0.107, 0.127, 0.096, 0.071 and 0.105 mSvy⁻¹ respectively. Figure 3 shows the variation of D_{organ} to the different organs. These results are all below the international tolerable limits of 1.0 mSv annually (Agbalagba, 2017) which further stress that the radiation levels do not constitute any immediate health effect on residents of the area. From the results, it is concluded that the testes and ovaries have highest and lowest sensitivity to radiation respectively. Similar conclusion has also been made by Darwish et al. (2015) and Agbalagba (2017).

Excess lifetime cancer risk ELCR

The ELCR was evaluated using the annual effective dose values using Equation 6 according to Rafique et al. (2014) and Agbalagba (2017)

$$ELCR = AEDE(mSvy^{-1}) \times DL \times RF$$
 (6)

where DL is average duration of life (70 years) and RF is

the fatal cancer risk factor per sievert (Sv⁻¹). For low-dose background radiation, which is considered to produce stochastic effects, ICRP 103 uses a fatal cancer risk factor value of 0.05 for public exposure (ICRP, 2007).

The excess lifetime cancer risk is used in radiation protection assessment to predict the probability of an individual developing cancer over his lifetime due to low radiation dose exposure, if it will occur at all. The calculated values for the ELCR ranges from 0.336×10^{-3} to 0.784×10^{-3} . The mean ELCR value obtained is $(0.541 \pm 0.032) \times 10^{-3}$. This mean value is approximately 86.6% higher than the world average value of 0.29×10^{-3} . This high value for excess lifetime cancer risk indicates that there exist the possibilities of cancer development by residents who wish to spend all their life time in the area. The ELCR values report here are lower than those reported by Agbalagba (2017) in industrial areas of Warri Nigeria and also lower than those for Okposi Okwu Salt Lake and Uburu Salt Lake environments of Ebonyi State, Nigeria reported by Avwiri et al. (2016).

Conclusion

This study so far has examined the radiological impact of industrial activities in Emene Industrial Layout by the assessment of the background radiation exposure levels in the area. From the study, the following conclusions are made:

- 1) The background radiation exposure rates shows that 53.3% of the sample locations indicate high radiation levels with mean value of 0.015±0.001 mRh⁻¹ which is above 0.013 mRh⁻¹ recommended limit for normal background radiation level.
- 2) The absorbed dose rates arising from BIR exposure are well above world average value which indicates a radiation contaminated environment.
- 3) The mean excess lifetime cancer risk value is 86.6% higher than the world average value. This suggests the possibility of cancer development in residents living in the area who wish to spend all their life time in the study
- 4) Generally, the study shows that Emene Industrial Layout is radiologically contaminated as a result of industrial activities taking place. The contamination and the radiation levels at these rates do not constitute any immediate health effect on residents of the area as shown by the effective dose to some organs of the body. However, there is the potential for long-term health hazards in future such as cancer due to accumulated doses.

RECOMMENDATIONS

1) The operators of the industries and concerned

- government agencies such as ministries of health and environment should devise means of reducing radioactive contaminants discharged into the environment to prevent further increase in the radiation level of the area.
- 2) High radioactive materials should be properly shielded and industries involved in the use of such materials be cited in isolated areas.
- 3) Residential buildings should be cited far away at places where the impact of the industries on BIR levels is less significant.
- 4) Regular monitoring of radiation levels in the area should be carried out by management of the various companies operating in the area, concerned government agencies and radiation protection scientists and agencies.
- 5) Further studies on radionuclides concentration in soil, water and crops planted in the area should be carried out.

CONFLICT OF INTERESTS

The authors have not declared any conflict of interests.

ACKNOWLEDGEMENTS

The authors thank Prof. C.E. Mokobia of Delta State University for releasing the radiation meter at subsidized rate as well as the managements of companies and residences of Emene Industrial Layout for giving free access to their compound.

REFERENCES

- Ademola JA, Olatunji M A (2013). Evaluation of NORM and dose assessment in an aluminum industry in Nigeria. World Journal of Nuclear Science and Technology 3:150-154 http://dx.doi.org/10.4236/wjnst.2013.34025
- Agbalagba EO, Avwiri GO, Ononugbo CP (2016). GIS mapping of impact of industrial activities on the terrestrial background ionizing radiation levels of Ughelli metropolis and its Environs, Nigeria. Environmental Earth Science 75:1425 DOI 10.1007/s12665-016-6216-v
- Agbalagba OE (2017). Assessment of excess lifetime cancer risk from gamma radiation levels in Effurun and Warri city of Delta state, Nigeria. Journal of Taibah University for Science 11(3):367-380.
- Akpabio LE, Etuk ES, Essian K (2005). Environmental radioactive levels in Ikot Ekpene Nigeria. Nigeria Journal of Space Research 1:80-87.
- Avwiri GO, Nwaka BU, Ononugbo CP (2016). Radiological health risk due to gamma dose rates around Okposi Okwu and Uburu salt lakes, Ebonyi State. International Journal of Emerging Research in Management and Technology 5(9):36-46.
- Aziz AQ, Shahina T, Kamal UD, Shahid M, Chiara C, Abdul W (2014). Evaluation of excessive lifetime cancer risk due to natural radioactivity in the rivers sediments of Northern Pakistan. Journal of Radiation Research and Applied Sciences 7:438-447.
- Benson ID, Ugbede FO (2018). Measurement of background ionizing radiation and evaluation of lifetime cancer risk in highly populated motor parks in Enugu city, Nigeria. IOSR Journal of Applied Physics 10(3):77-82.
- Darwish DAE, Abul-Nasr KTM, El-Khayatt AM (2015). The assessment

- of natural radioactivity and its associated radiological hazards and dose parameters in granite samples from South Sinai, Egypt. Journal of Radiation Research and Applied Sciences 8:17-25
- Emelue HU, Jibiri NN, Eke BC (2014). Excess lifetime cancer risk due to gamma radiation in and around Warri refining and petrochemical company in Niger Delta, Nigeria. British Journal of Medicine and Medical Research 4(13):2590-2598
- International Commission on Radiological Protection (ICRP) (1973). International Commission on Radiological Protection Implication of Commission Recommendations 22 that doses be kept As Low as Reasonably Achievable (ALARA).
- International Commission on Radiological Protection (ICRP) (1996). International Commission on Radiological Protection Age-dependent Doses to Members of the Public from Intake of Radionuclides. Part5: Compilation of Ingestion and Inhalation Coefficients ICRP Publication 72, Pergamon Press, Oxford.
- International Commission on Radiological Protection (ICRP) (2007). The 2007 Recommendations of the International Commission on Radiological Protection: Annals of the ICRP Publication Elsevier. 103:2-4.
- James IU, Moses IF, Vandi JN (2013). Assessment of gamma dose rate within Idu industrial area of the Federal Capital Territory (FCT) Abuja, Nigeria. The International Journal of Engineering and Science 2(11):52-55.
- Lu XW, Zhang XL (2006). Measurement of natural radioactivity in sand samples collected from Baoji Weihe sands park, China. Environmental Geology 50(7):977-982. http://dx.doi.org/10.1007/s00254-006-0266-5
- Luevano-Gurrola S, Perez-Tapia A, Pinedo-Alvarez C, Carrillo-Flores J, Montero-Cabrera ME, Renteria-Villalobos M (2015). Lifetime effective dose assessment based on background outdoor gamma exposure in Chihuahua City, Mexico. International Journal of Environmental Research and Public Health 12:12324-12339. doi:10.3390/ijerph121012324
- Mokobia CE, Oyibo B (2017). Determination of background ionization radiation (BIR) levels in some selected farms in Delta State, Nigeria. Nigerian Journal of Science and Environment 15(1):27-31.
- Monica S, Visnu Prasad AK, Soniya SR, Jojo PJ (2016). Estimation of indoor and outdoor effective doses and lifetime cancer risk from gamma dose rates along the coastal regions of Kollam district, Kerala. Radiation Protection and Environment 39(1):38-43.
- National Council on Radiation Protection (NCRP) (1993). National Council on Radiation Protection and Measurements: Limitation of exposure to ionizing radiation, NCRP report No.116.

- Ononugbo CP, Mgbemere CJ (2016). Dose rate and annual effective dose assessment of terrestrial gamma radiation in Notre fertilizer plant, Onne, Rivers State, Nigeria. International Journal of Emerging Research in Management and Technology 5(9):30-35
- Osimobi JC, Agbalagba EO, Avwiri GO, Ononugbo CP (2015). GIS mapping and background ionizing radiation (BIR) assessment of solid mineral mining sites in Enugu State, Nigeria. Open Access Library Journal 2:1-9. http://dx.doi.org/10.4236/oalib.1101979
- Rafique M, Saeed UR, Muhammad B, Wajid A, Iftikhar A, Khursheed AL, Khalil AM (2014). Evaluation of excess life time cancer risk from gamma dose rates in Jhelum valley. Journal of Radiation Research and Applied Sciences 7:29-35
- Taskin H, Karavus M, Ay P, Topuzoglu A, Hindiroglu S, Karahan G (2009). Radionuclide concentrations in soil and lifetime cancer risk due to the gamma radioactivity in Kirklareli. Turkey Journal of Environmental Radioactivity 100:49-53.
- Termizi-Ramli A, Aliyu AS, Agba EH, Saleh MA (2014). Effective dose from natural background radiation in Keffi and Akwanga towns, central Nigeria. International Journal of Radiation Research 12(1):47-52.
- Ugbede FO, Echeweozo EO (2017). Estimation of annual effective dose and excess lifetime cancer risk from background ionizing radiation levels within and around quarry site in Okpoto-Ezillo, Ebonyi State, Nigeria. Journal of Environment and Earth Science 7(12):74-79
- United Nations Scientific Committee on the effect of Atomic Radiation (UNSCEAR) (2008). Report on the sources and effects of ionizing radiation. Report to the General Assembly with Scientific Annexes. United Nations, New York.
- Zarghani H, Jafari R (2017). Assessment of outdoor and indoor background gamma radiation, the annual effective dose and excess lifetime cancer risk in Birjand, Iran. Jundishapur Journal of Health Sciences 9(3):1-4. doi: 10.17795/jjhs-40791.